


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:225.0V I:0.1670A P:36.00W PF:0.9550 Freq:50.00Hz Lamp Flux:2387.3x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:75		Shielding Angle:	

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 66.31 lm/W
MODEL	ALT85-36G30-15-L1	I _{max} (cd)	19796	S/MH(C0/180)	0.28	
NOMINAL POWER(W)	36	LOR(%)	100.0	S/MH(C90/270)	0.28	
RATED VOLTAGE(V)	220-240	TOTAL FLUX(lm)	2387.3	□ UP,DN(C0-180)	0.0,50.6	
NOMINAL FLUX(lm)	2387.3	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.0,49.4	
LAMPS INSIDE	1	□ up(%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)	225	□ down(%)	100.0	CIBSE SHR MAX	1.00	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

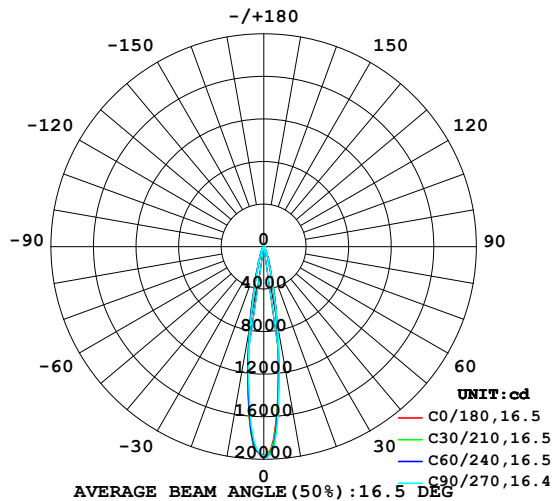

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

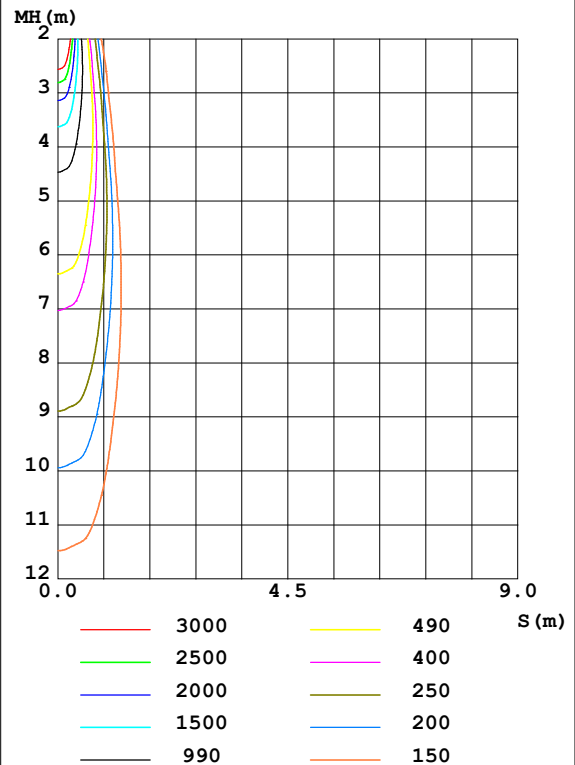

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AE
 Test Date:2020-03-06

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.240m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	768.9	785.3	729.8	709.4	710.0	689.9	729.0	726.8	0- 10	1189	1189	49.8,49.8
20	121.2	124.8	117.4	115.3	119.4	114.1	114.8	110.7	10- 20	824.0	2013	84.3,84.3
30	26.60	27.97	25.34	23.97	25.62	24.36	24.97	22.91	20- 30	261.4	2274	95.3,95.3
40	6.309	7.093	6.282	5.093	5.969	6.027	5.905	5.008	30- 40	82.25	2357	98.7,98.7
50	1.078	1.267	0.8641	0.8477	0.9617	1.022	0.9539	0.8611	40- 50	21.36	2378	99.6,99.6
60	0.2301	0.1985	0.2068	0.2363	0.2686	0.2712	0.2984	0.2464	50- 60	4.265	2382	99.8,99.8
70	0.1309	0.1247	0.1286	0.1343	0.1710	0.1768	0.1787	0.1636	60- 70	1.800	2384	99.9,99.9
80	0.1492	0.1502	0.1481	0.1507	0.1539	0.1572	0.1556	0.1578	70- 80	1.602	2386	99.9,99.9
90	0.2050	0.2053	0.2070	0.2043	0.1013	0.1021	0.1004	0.1018	80- 90	1.679	2387	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AE
 Test Date:2020-03-06

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.240m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:225.0V I:0.1670A P:36.00W PF:0.9550 Freq:50.00Hz Lamp Flux:2387.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:75	Shielding Angle:

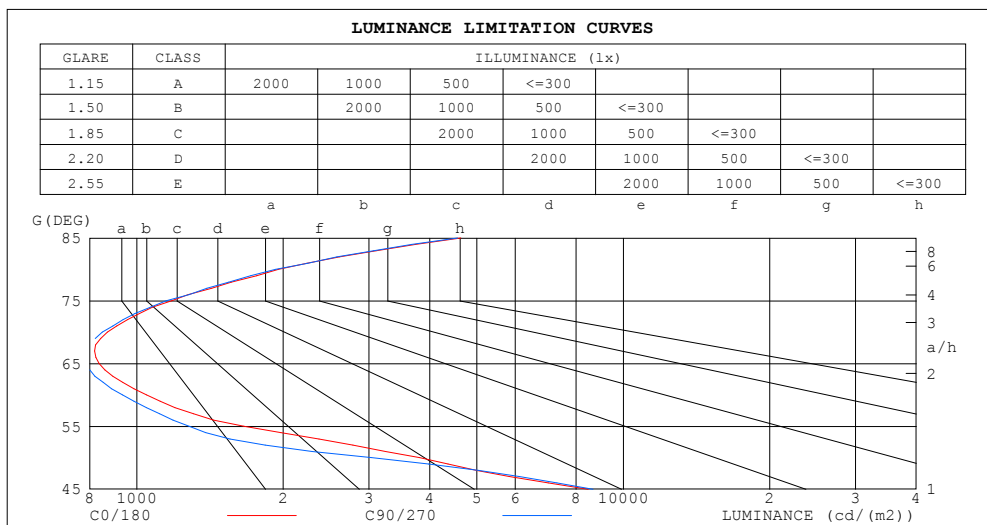

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4633	4562
80	1954	1928
75	1181	1150
70	870	850
65	837	787
60	1046	935
55	1660	1280
50	3813	3038
45	8476	8668


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AE
Test Date:2020-03-06

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:225.0V I:0.1670A P:36.00W PF:0.9550 Freq:50.00Hz Lamp Flux:2387.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:75	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

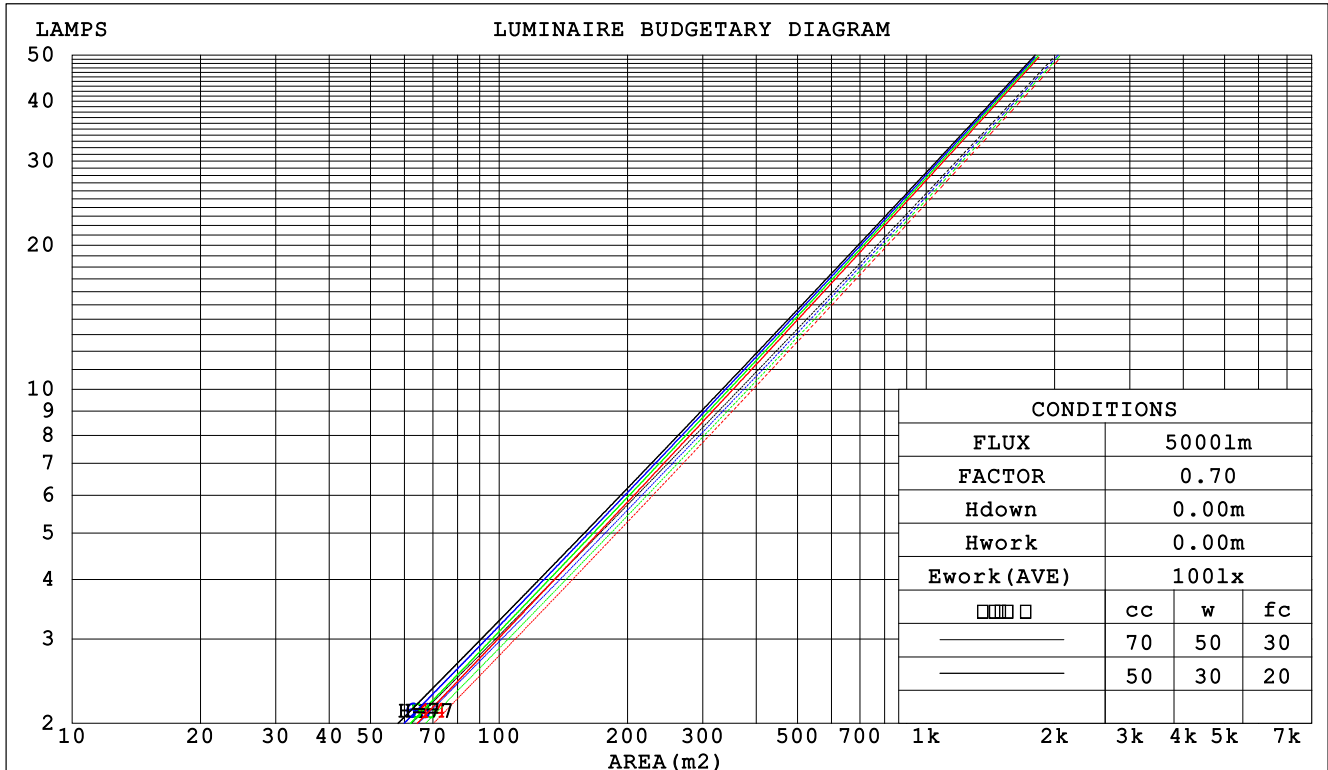

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AE
 Test Date:2020-03-06

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.240m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:225.0V I:0.1670A P:36.00W PF:0.9550 Freq:50.00Hz Lamp Flux:2387.3x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:75		Shielding Angle:	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0														
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.128	.073	.023	.121	.069	.022	.109	.062	.020	.098	.056	.018	.087	.050	.016															
2.0	.117	.064	.020	.112	.062	.019	.102	.057	.018	.092	.052	.016	.084	.047	.015															
3.0	.108	.058	.017	.104	.056	.017	.096	.052	.016	.088	.048	.015	.081	.045	.014															
4.0	.101	.052	.015	.097	.051	.015	.090	.048	.014	.084	.045	.014	.078	.042	.013															
5.0	.094	.048	.014	.091	.047	.014	.085	.044	.013	.080	.042	.013	.075	.040	.012															
6.0	.089	.045	.013	.086	.044	.013	.081	.042	.012	.076	.040	.012	.072	.038	.011															
7.0	.084	.042	.012	.082	.041	.012	.077	.039	.011	.073	.038	.011	.069	.036	.011															
8.0	.080	.039	.011	.078	.038	.011	.074	.037	.011	.070	.036	.010	.067	.034	.010															
9.0	.076	.037	.010	.074	.036	.010	.071	.035	.010	.068	.034	.010	.065	.033	.009															
10.0	.072	.035	.010	.071	.034	.010	.068	.033	.009	.065	.032	.009	.062	.031	.009															

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.168	.158	.149	.144	.135	.128	.098	.093	.089	.056	.054	.051	.018	.017	.017	
2.0	.149	.133	.119	.128	.114	.103	.087	.079	.072	.050	.046	.042	.016	.015	.014	
3.0	.133	.113	.097	.114	.098	.084	.078	.068	.059	.045	.040	.035	.015	.013	.011	
4.0	.120	.098	.080	.103	.084	.070	.071	.059	.049	.041	.034	.029	.013	.011	.010	
5.0	.109	.085	.067	.094	.074	.059	.065	.051	.041	.037	.030	.025	.012	.010	.008	
6.0	.100	.075	.057	.086	.065	.050	.059	.045	.035	.034	.027	.021	.011	.009	.007	
7.0	.092	.067	.049	.079	.058	.043	.055	.041	.030	.032	.024	.018	.010	.008	.006	
8.0	.085	.060	.042	.073	.052	.037	.051	.036	.026	.030	.021	.016	.010	.007	.005	
9.0	.079	.054	.037	.068	.047	.032	.047	.033	.023	.028	.019	.014	.009	.006	.005	
10.0	.074	.049	.032	.064	.043	.028	.044	.030	.020	.026	.018	.012	.008	.006	.004	

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AE
Test Date:2020-03-06

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:225.0V I:0.1670A P:36.00W PF:0.9550 Freq:50.00Hz Lamp Flux:2387.3x1 lm											
NAME:					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.:75			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	2H	7.5	8.1	7.7	8.3	8.4	7.3	7.9	7.5	8.1	8.2
	3H	7.4	8.0	7.7	8.1	8.3	7.2	7.8	7.4	7.9	8.1
	4H	7.4	7.9	7.6	8.1	8.3	7.2	7.7	7.4	7.9	8.1
	6H	7.4	7.8	7.6	8.1	8.3	7.1	7.6	7.4	7.9	8.1
	8H	7.4	7.9	7.7	8.1	8.3	7.2	7.7	7.5	7.9	8.1
	12H	7.5	7.9	7.8	8.2	8.4	7.3	7.7	7.6	8.0	8.2
4H	2H	7.3	7.9	7.6	8.1	8.3	7.1	7.7	7.4	7.9	8.1
	3H	7.2	7.7	7.5	7.9	8.2	7.0	7.5	7.3	7.7	8.0
	4H	7.1	7.6	7.5	7.9	8.2	6.9	7.4	7.3	7.7	8.0
	6H	7.2	7.5	7.5	7.9	8.2	7.0	7.3	7.3	7.7	8.0
	8H	7.2	7.6	7.6	7.9	8.3	7.0	7.4	7.4	7.7	8.1
	12H	7.4	7.7	7.8	8.1	8.5	7.2	7.6	7.6	7.9	8.3
8H	4H	7.0	7.4	7.4	7.7	8.1	6.8	7.2	7.2	7.5	7.9
	6H	7.1	7.4	7.5	7.8	8.2	6.9	7.2	7.3	7.6	8.0
	8H	7.2	7.5	7.7	7.9	8.3	7.0	7.3	7.5	7.7	8.2
	12H	7.6	7.8	8.0	8.2	8.7	7.4	7.6	7.9	8.1	8.5
12H	4H	7.0	7.3	7.4	7.7	8.1	6.8	7.1	7.2	7.5	7.9
	6H	7.1	7.3	7.5	7.7	8.2	6.9	7.1	7.3	7.6	8.0
	8H	7.3	7.5	7.7	7.9	8.4	7.1	7.3	7.5	7.7	8.2
Variations with the observer position at spacings:											
S = 1.0H	+ 2.6 / - 5.4					+ 2.6 / - 5.3					
1.5H	+ 4.6 / - 5.3					+ 4.7 / - 5.3					
2.0H	+ 4.0 / - 1.9					+ 4.4 / - 1.6					

CIE Pub.117, 2387 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 3.0$)

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AE
Test Date:2020-03-06

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:225.0V I:0.1670A P:36.00W PF:0.9550 Freq:50.00Hz Lamp Flux:2387.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:75	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	85	82	90	85	82	90	85	81	78
0.80	98	93	89	97	92	89	96	92	89	85
1.00	102	97	93	101	96	93	99	96	92	89
1.25	105	100	97	104	100	97	102	99	96	92
1.50	108	103	100	106	103	100	104	101	99	95
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	107	104	107	104	102	97
3.00	113	109	107	111	108	106	108	105	104	98
4.00	114	112	110	112	110	109	109	107	106	99
5.00	116	114	112	114	112	110	110	108	107	100
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: AE
Test Date: 2020-03-06

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 7.240m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:225.0V I:0.1670A P:36.00W PF:0.9550 Freq:50.00Hz Lamp Flux:2387.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:75	Shielding Angle:

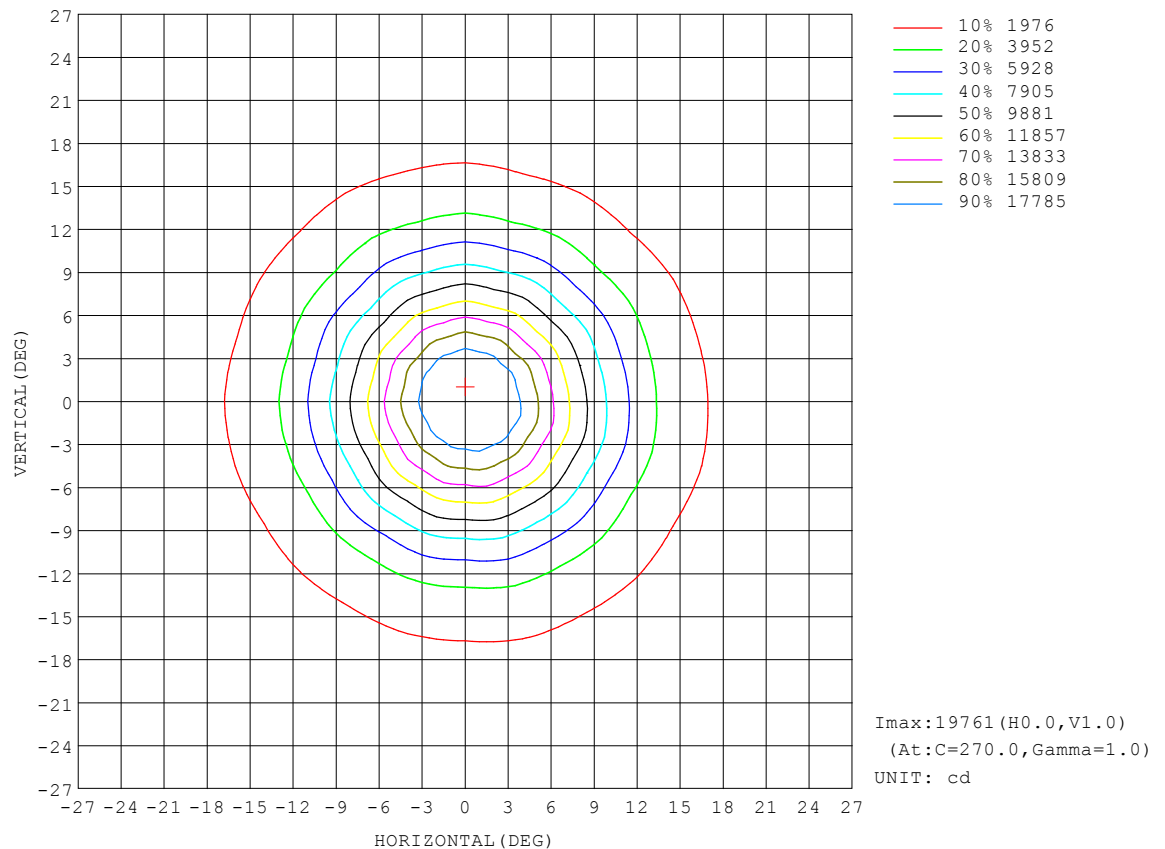


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AE
Test Date:2020-03-06

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

AAI Figure

Test:U:225.0V I:0.1670A P:36.00W PF:0.9550 Freq:50.00Hz Lamp Flux:2387.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:75	Shielding Angle:

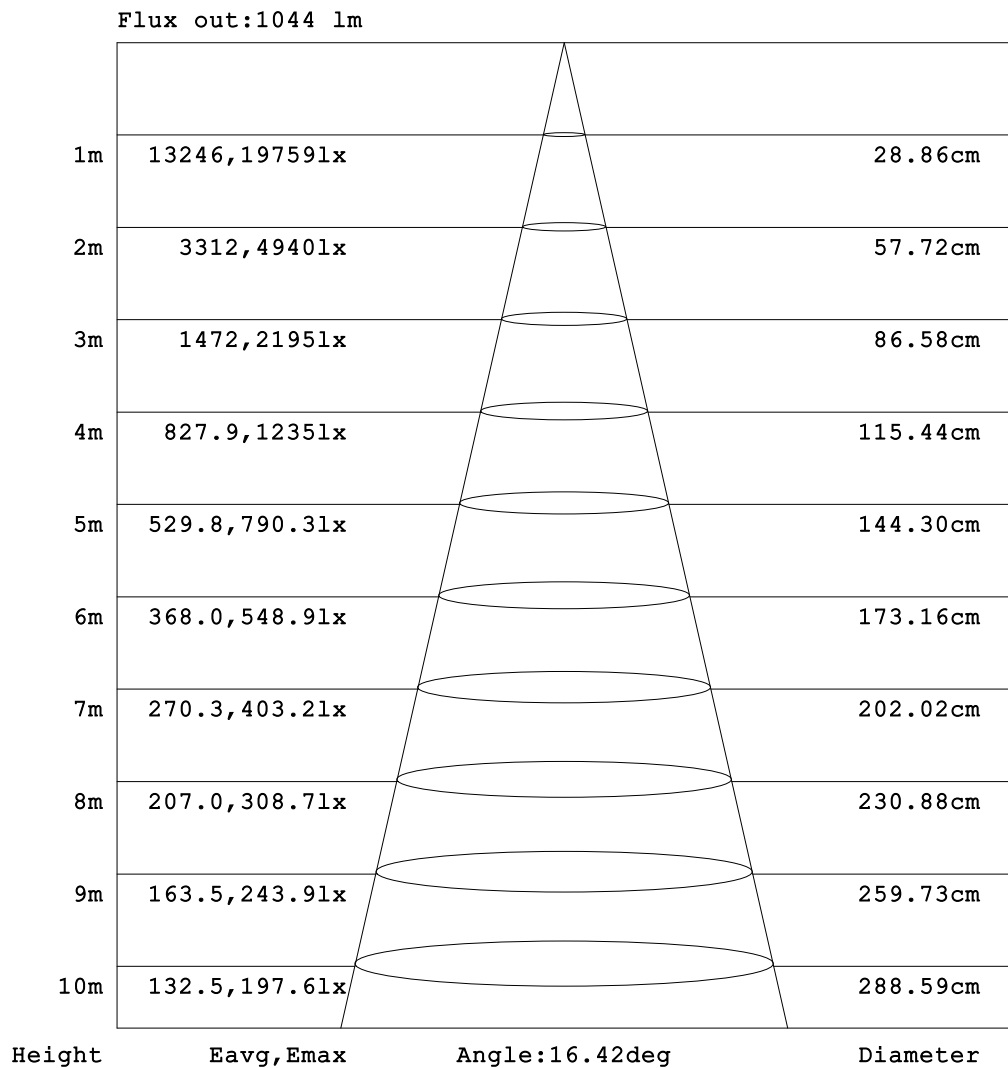


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AE
 Test Date:2020-03-06

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.240m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:225.0V I:0.1670A P:36.00W PF:0.9550 Freq:50.00Hz Lamp Flux:2387.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:75	Shielding Angle:

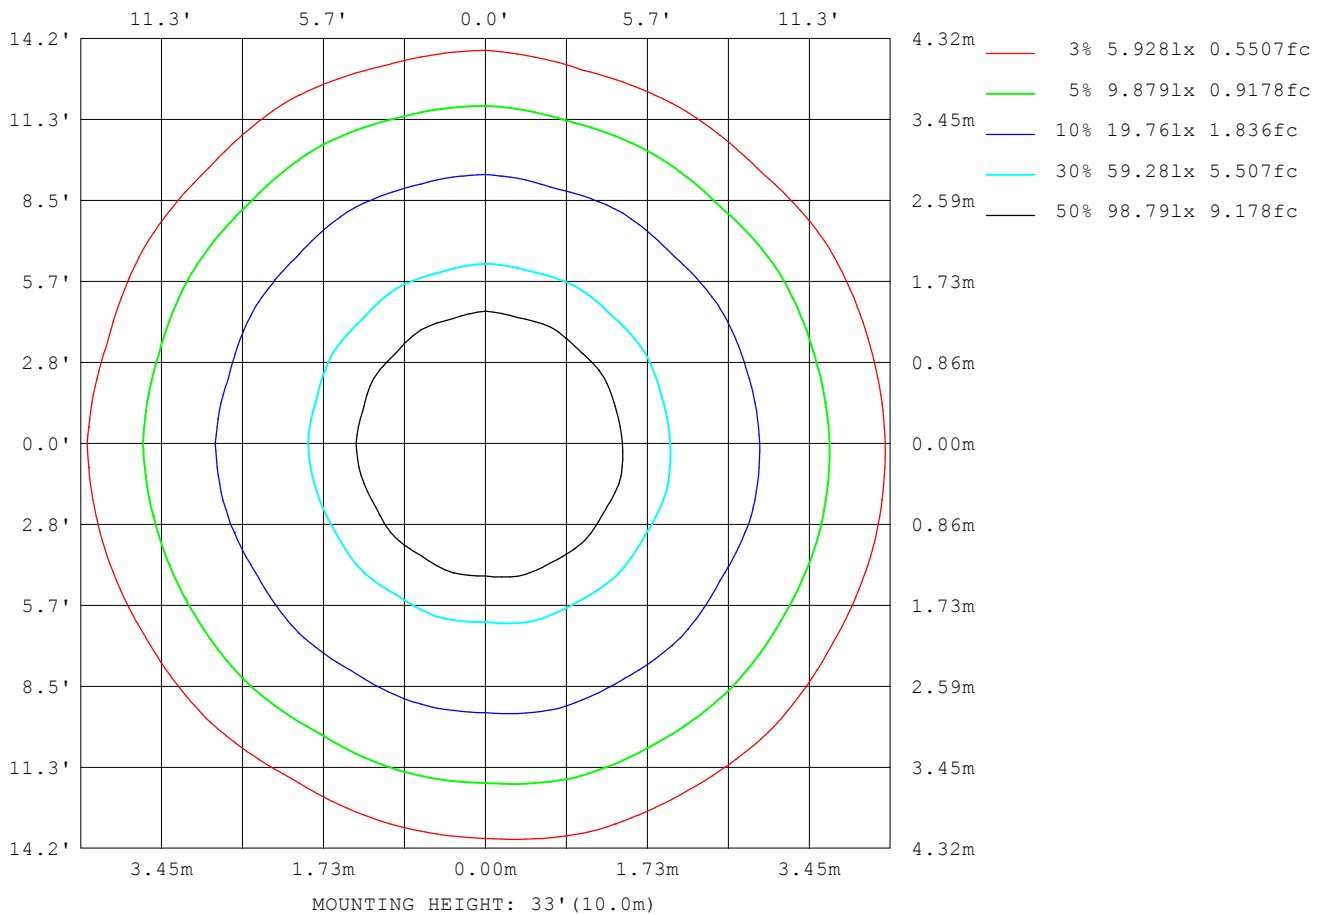

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AE
 Test Date:2020-03-06

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.240m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:225.0V I:0.1670A P:36.00W PF:0.9550 Freq:50.00Hz Lamp Flux:2387.3x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:75	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	946
L_0~180 (75) av	1324
L_0~180 (85) av	3991
L_90~270 (65) av	963
L_90~270 (75) av	1313
L_90~270 (85) av	3999
L_45 (65) av	919
L_45 (75) av	1324
L_45 (85) av	4054

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AE
 Test Date:2020-03-06

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.240m [K=1.0000]
 Remarks:

Planar Illuminance Curve

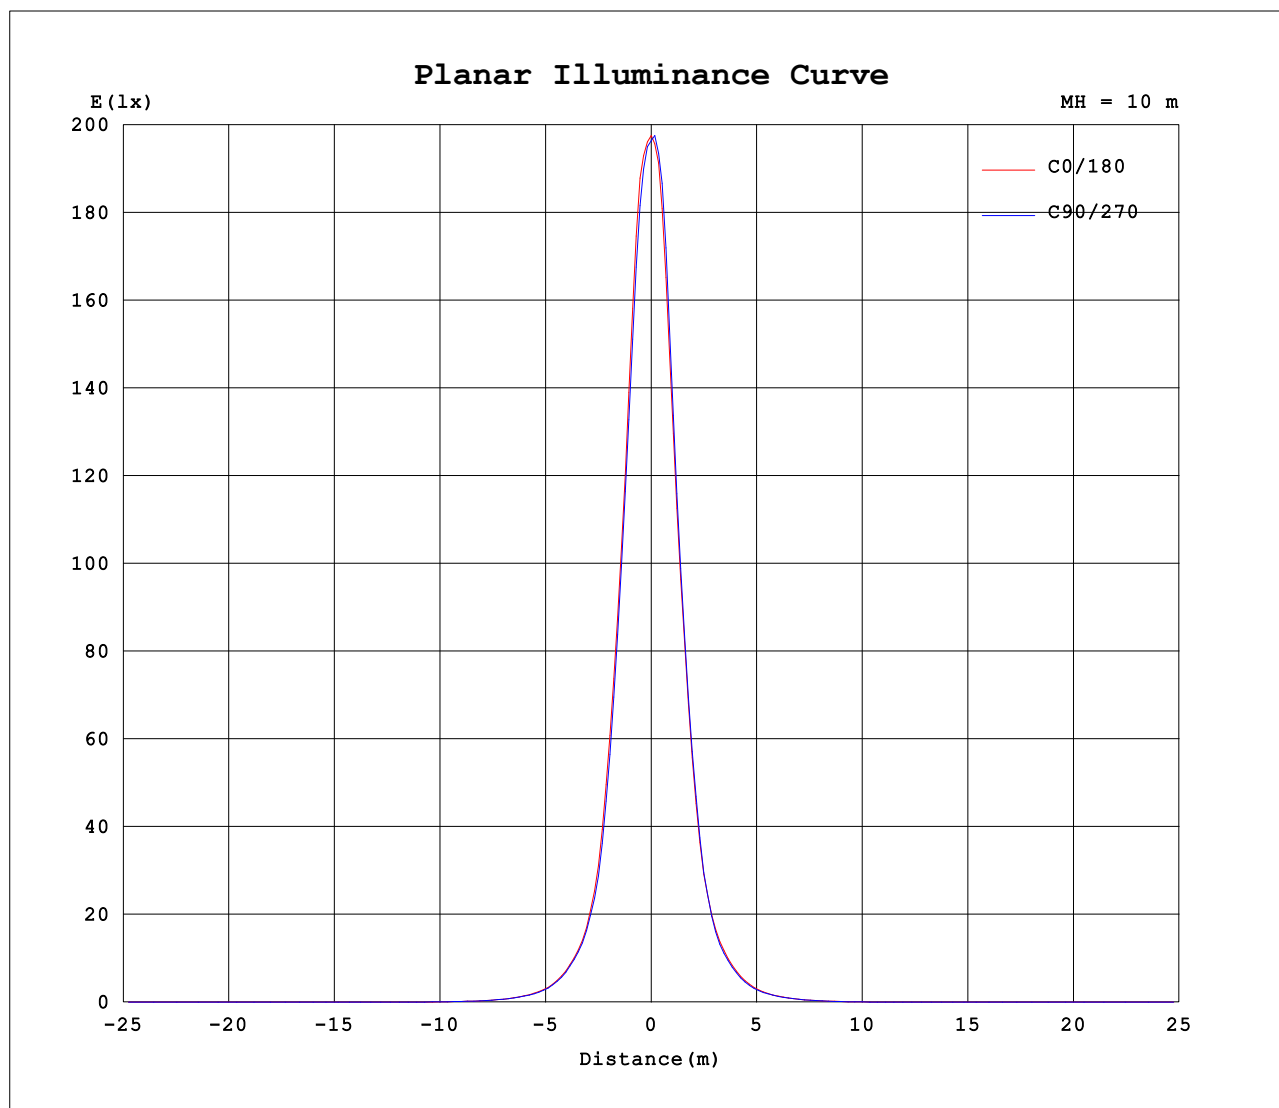

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: AE
Test Date: 2020-03-06

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 7.240m [K=1.0000]
Remarks:

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.240m [K=1.0000]
 Remarks:

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.240m [K=1.0000]
 Remarks: