


**LUMINAIRE PHOTOMETRIC TEST REPORT**


NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 58	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 85.38 lm/W
MODEL	TL45-15G30-36-S	Imax (cd)	3611	S/MH(C0/180)	0.52	
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	0.53	
RATED VOLTAGE(V)	220-240	TOTAL FLUX(lm)	1289.3	$\eta$ UP,DN(C0-180)	0.0,50.0	
NOMINAL FLUX(lm)	1289.26	CIE CLASS	DIRECT	$\eta$ UP,DN(C180-360)	0.0,50.0	
LAMPS INSIDE	1	$\eta$ up (%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	230	$\eta$ down (%)	100.0	CIBSE SHR MAX	0.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

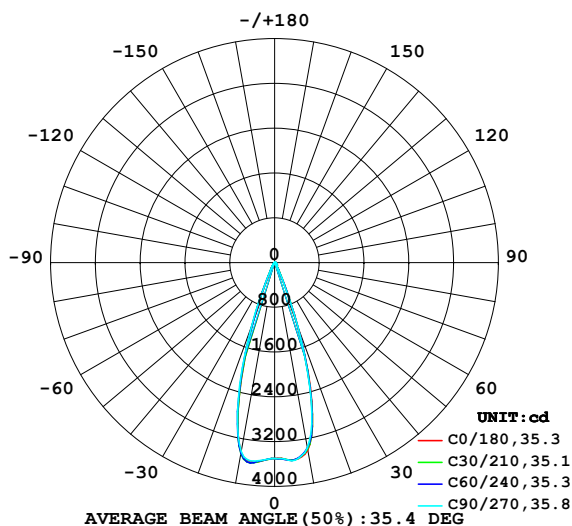

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

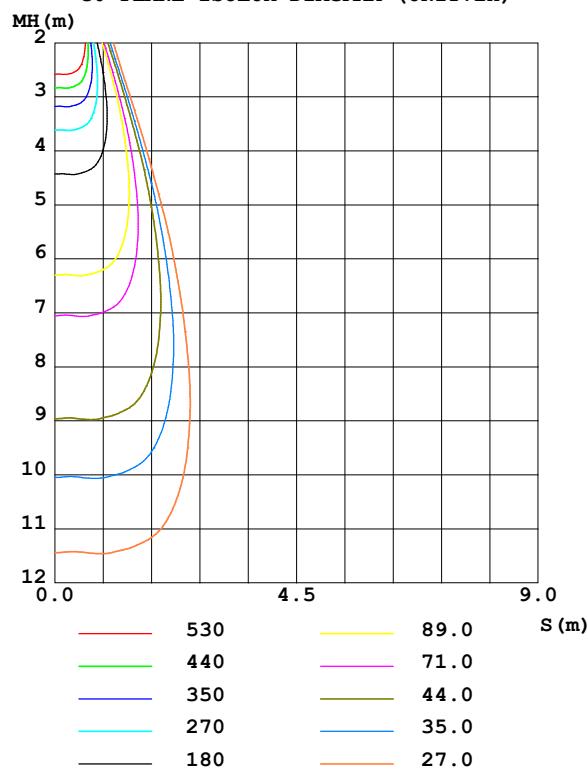

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:AE  
 Test Date:2020-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
 Humidity:65.0%  
 Test Distance:7.240m [K=1.0000]  
 Remarks:

### ZONAL FLUX DIAGRAM

#### ZONAL FLUX DIAGRAM:


$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	3409	3389	3364	3390	3452	3457	3433	3395	0- 10	335.8	335.8	26,26
20	1235	1263	1208	1174	1122	1110	1211	1227	10- 20	654.8	990.6	76.8,76.8
30	129.8	128.9	123.7	121.9	125.0	126.8	134.1	130.2	20- 30	191.8	1182	91.7,91.7
40	48.48	48.06	43.75	43.21	44.84	45.11	45.75	45.55	30- 40	47.15	1230	95.4,95.4
50	25.20	24.92	23.35	23.10	24.05	24.58	24.96	25.21	40- 50	25.36	1255	97.3,97.3
60	14.42	14.44	13.54	13.59	13.91	14.39	14.80	14.69	50- 60	16.92	1272	98.7,98.7
70	7.716	7.889	7.290	7.245	7.292	7.364	7.696	7.746	60- 70	10.55	1282	99.5,99.5
80	3.078	3.158	2.956	2.875	2.647	2.699	2.799	2.901	70- 80	5.303	1288	99.9,99.9
90	0.8799	0.8936	0.8977	0.9161	0.4496	0.4331	0.4312	0.4286	80- 90	1.531	1289	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AE  
Test Date:2020-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:7.240m [K=1.0000]  
Remarks:

# LUMINANCE LIMITATION CURVES

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 58	Shielding Angle:

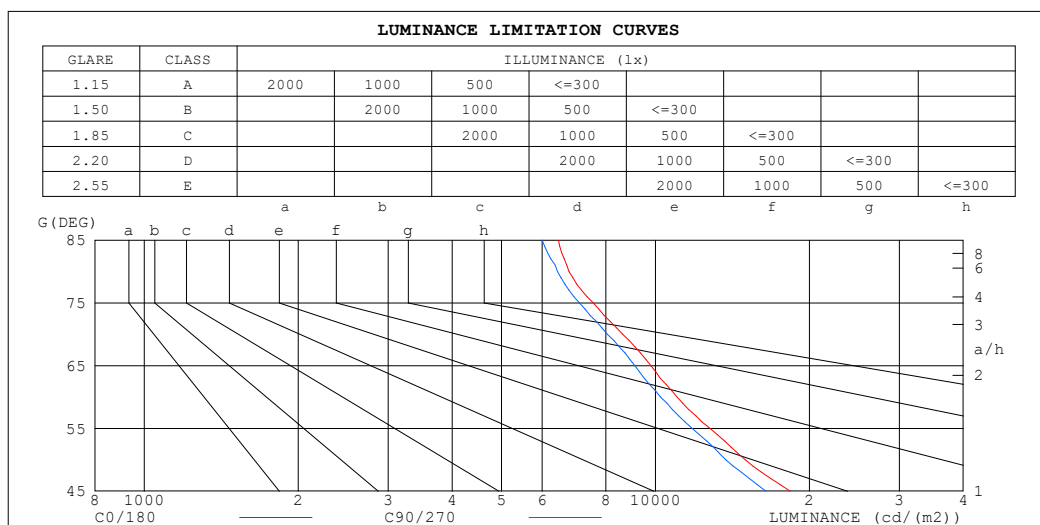

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6462	6002
80	6778	6436
75	7557	7109
70	8627	8059
65	9792	9111
60	11025	10237
55	12795	11797
50	14992	13737
45	18356	16434


C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AE  
Test Date:2020-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:7.240m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 58	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.08	1.10	1.08	1.07	1.06	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96
2.0	1.06	1.03	1.00	1.05	1.02	.99	1.01	.99	.97	.99	.97	.95	.96	.94	.93	.91
3.0	1.01	.97	.94	.90	.96	.93	.97	.94	.92	.95	.93	.90	.93	.91	.89	.88
4.0	.97	.92	.89	.96	.92	.88	.94	.90	.87	.92	.89	.86	.90	.88	.86	.84
5.0	.93	.88	.85	.92	.88	.84	.90	.86	.84	.89	.85	.83	.87	.84	.82	.81
6.0	.89	.84	.81	.88	.84	.81	.87	.83	.80	.86	.82	.80	.84	.82	.79	.78
7.0	.86	.81	.78	.85	.81	.78	.84	.80	.77	.83	.79	.77	.82	.79	.77	.75
8.0	.83	.78	.75	.82	.78	.75	.81	.77	.75	.80	.77	.74	.79	.76	.74	.73
9.0	.80	.75	.72	.79	.75	.72	.79	.75	.72	.78	.74	.72	.77	.74	.72	.71
10.0	.77	.73	.70	.77	.73	.70	.76	.72	.70	.76	.72	.70	.75	.72	.69	.68

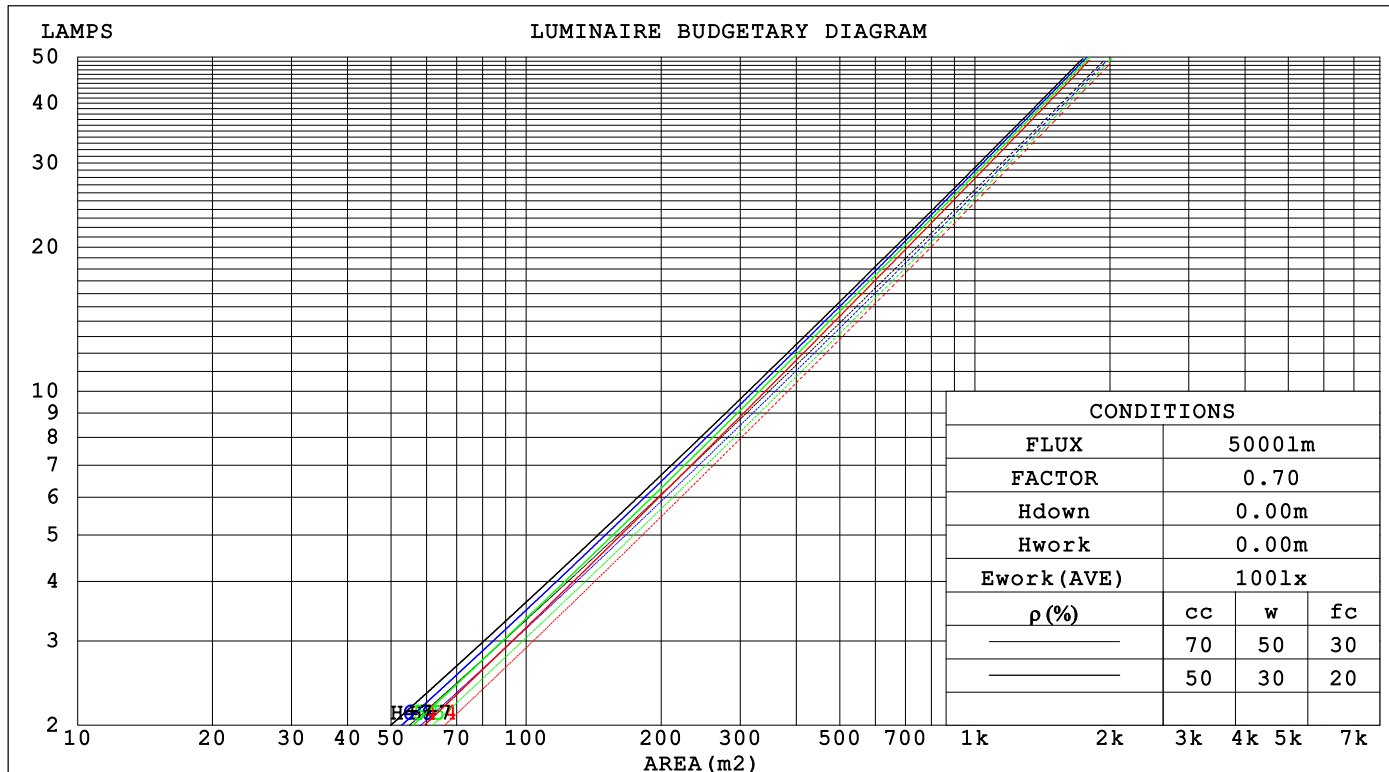

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AE  
Test Date:2020-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:7.240m [K=1.0000]  
Remarks:

## WEC AND CCEC

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 58	Shielding Angle:

pcc	80%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Wall Exitance Coefficients(WEC)
0.0						
1.0	.150 .085 .027	.143 .082 .026	.131 .075 .024	.120 .069 .022	.109 .063 .020	
2.0	.140 .077 .023	.134 .074 .023	.124 .069 .021	.114 .064 .020	.106 .060 .019	
3.0	.130 .069 .021	.126 .067 .020	.117 .063 .019	.109 .060 .018	.102 .056 .017	
4.0	.122 .064 .019	.118 .062 .018	.111 .059 .018	.104 .056 .017	.098 .053 .016	
5.0	.115 .059 .017	.112 .057 .017	.106 .055 .016	.100 .053 .016	.094 .050 .015	
6.0	.109 .055 .016	.106 .054 .015	.101 .052 .015	.096 .050 .015	.091 .048 .014	
7.0	.103 .051 .014	.101 .050 .014	.096 .049 .014	.092 .047 .014	.088 .045 .013	
8.0	.099 .048 .014	.096 .047 .013	.092 .046 .013	.088 .045 .013	.085 .043 .013	
9.0	.094 .046 .013	.092 .045 .013	.088 .044 .012	.085 .043 .012	.082 .041 .012	
10.0	.090 .043 .012	.088 .043 .012	.085 .042 .012	.082 .041 .012	.079 .040 .011	

pcc	80%	70%	50%	30%	10%	0
pw	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
pfc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio					Ceiling Cavity Exitance Coefficients(CCEC)
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.169 .158 .147	.145 .135 .127	.099 .093 .087	.057 .054 .051	.018 .017 .016	
2.0	.152 .133 .116	.130 .114 .101	.089 .079 .070	.051 .046 .041	.016 .015 .013	
3.0	.138 .113 .094	.118 .098 .082	.081 .068 .057	.047 .040 .034	.015 .013 .011	
4.0	.126 .098 .077	.108 .085 .067	.074 .059 .047	.043 .035 .028	.014 .011 .009	
5.0	.115 .086 .064	.099 .074 .056	.068 .052 .040	.040 .031 .023	.013 .010 .008	
6.0	.107 .076 .054	.092 .066 .047	.063 .046 .033	.037 .027 .020	.012 .009 .007	
7.0	.099 .068 .046	.086 .059 .040	.059 .041 .029	.034 .024 .017	.011 .008 .006	
8.0	.093 .061 .040	.080 .053 .035	.055 .037 .025	.032 .022 .015	.010 .007 .005	
9.0	.087 .056 .035	.075 .049 .030	.052 .034 .021	.030 .020 .013	.010 .007 .004	
10.0	.083 .051 .030	.071 .045 .027	.049 .031 .019	.029 .019 .011	.009 .006 .004	

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AE  
Test Date:2020-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:7.240m [K=1.0000]  
Remarks:

### UGR(Unified Glare Rating) Table

NAME:	TYPE:					WEIGHT:				
SPEC.:	DIM.:					SERIAL No.:				
MFR.:	SUR.: 58					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.4	14.1	13.6	14.2	14.4	13.0	13.7	13.2	13.8	14.0
3H	14.1	14.8	14.4	15.0	15.2	13.7	14.4	14.0	14.6	14.8
4H	14.4	15.1	14.7	15.3	15.5	14.0	14.7	14.3	14.9	15.1
6H	14.6	15.2	14.9	15.5	15.7	14.3	14.9	14.5	15.1	15.3
8H	14.7	15.3	15.0	15.5	15.8	14.3	14.9	14.6	15.2	15.4
12H	14.8	15.3	15.1	15.6	15.9	14.4	14.9	14.7	15.2	15.5
4H 2H	13.7	14.3	13.9	14.5	14.7	13.3	14.0	13.6	14.2	14.4
3H	14.6	15.2	14.9	15.4	15.7	14.3	14.8	14.6	15.1	15.4
4H	15.0	15.5	15.3	15.8	16.1	14.7	15.2	15.0	15.5	15.8
6H	15.3	15.8	15.7	16.1	16.4	15.0	15.4	15.4	15.8	16.1
8H	15.4	15.8	15.8	16.2	16.6	15.1	15.5	15.5	15.9	16.2
12H	15.5	15.9	15.9	16.3	16.6	15.2	15.6	15.6	15.9	16.3
8H 4H	15.1	15.5	15.5	15.9	16.2	14.8	15.2	15.2	15.6	15.9
6H	15.5	15.9	15.9	16.3	16.7	15.2	15.6	15.6	16.0	16.4
8H	15.7	16.0	16.1	16.4	16.9	15.4	15.7	15.8	16.1	16.6
12H	15.8	16.1	16.3	16.5	17.0	15.5	15.8	16.0	16.2	16.7
12H 4H	15.1	15.5	15.5	15.8	16.2	14.8	15.2	15.2	15.5	15.9
6H	15.5	15.8	16.0	16.3	16.7	15.2	15.6	15.7	16.0	16.4
8H	15.7	16.0	16.2	16.4	16.9	15.4	15.7	15.9	16.2	16.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.6 / - 0.7					+ 0.5 / - 0.7				
1.5H	+ 0.8 / - 0.5					+ 0.6 / - 0.5				
2.0H	+ 0.9 / - 0.6					+ 0.7 / - 0.7				

CIE Pub.117, 1289 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.9)  
Area: 0.00264 m2

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AE  
Test Date:2020-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:7.240m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 58	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	88	82	79	87	82	79	75
0.80	96	90	87	95	90	87	94	89	86	83
1.00	100	95	91	99	94	91	98	94	90	86
1.25	104	99	95	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	107	104	101	105	102	99	94
2.50	110	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: AE  
Test Date: 2020-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 7.240m [K=1.0000]  
Remarks:

### ISOCANDELA DIAGRAM

NAME :	TYPE :	WEIGHT :
SPEC. :	DIM. :	SERIAL No. :
MFR. :	SUR. : 58	Shielding Angle :

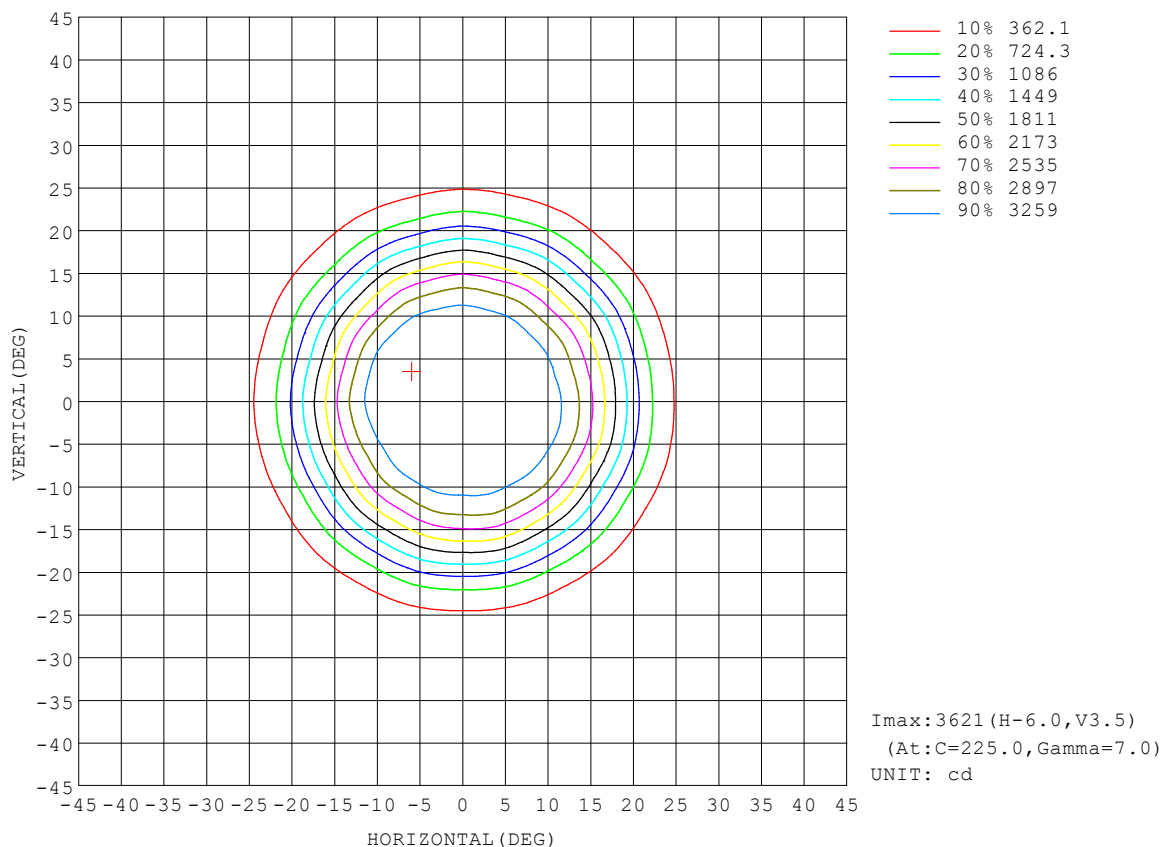


C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: AE  
Test Date: 2020-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 7.240m [K=1.0000]  
Remarks:



### AAI Figure

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 58	Shielding Angle:

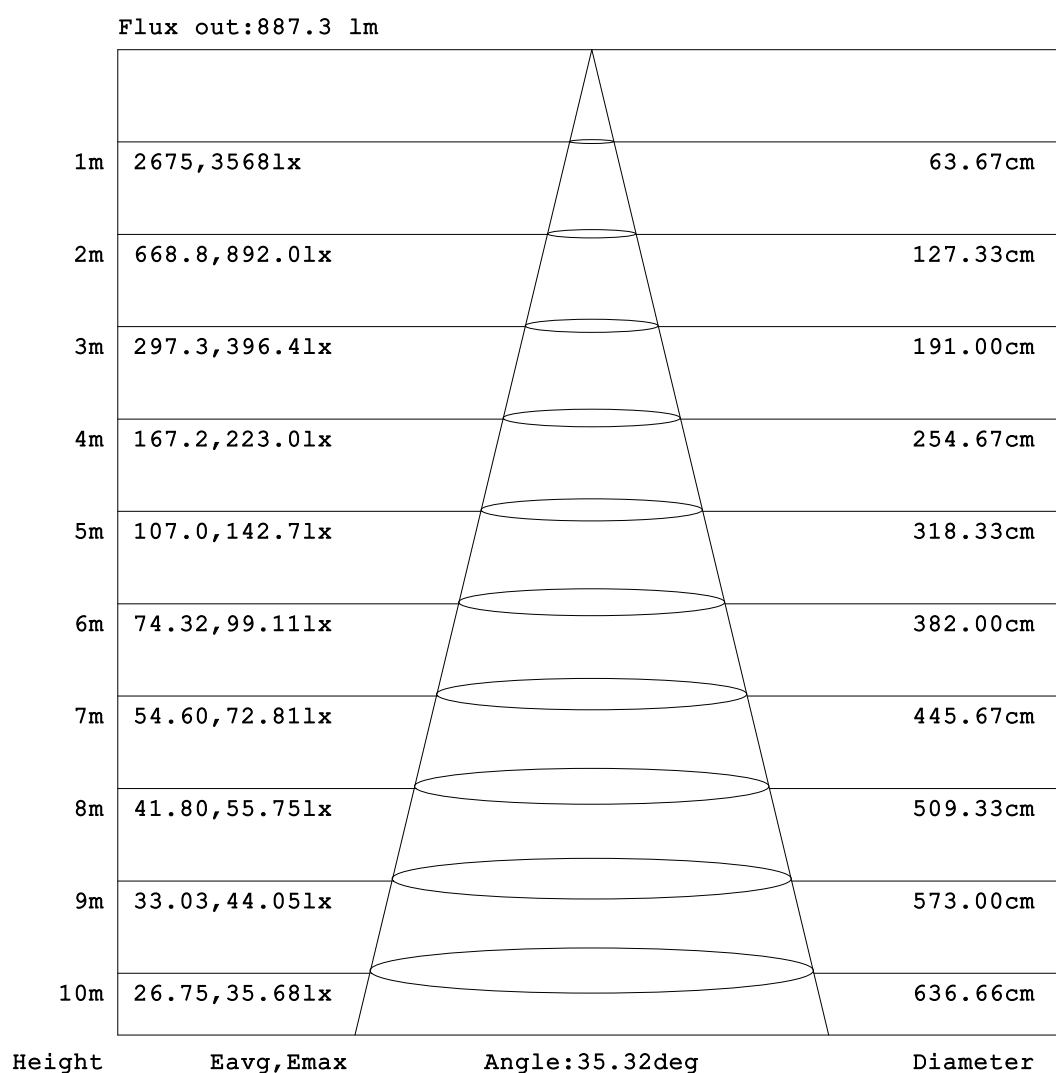


**Note:**The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AE  
Test Date:2020-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:7.240m [K=1.0000]  
Remarks:

### ISOLUX DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 58	Shielding Angle:

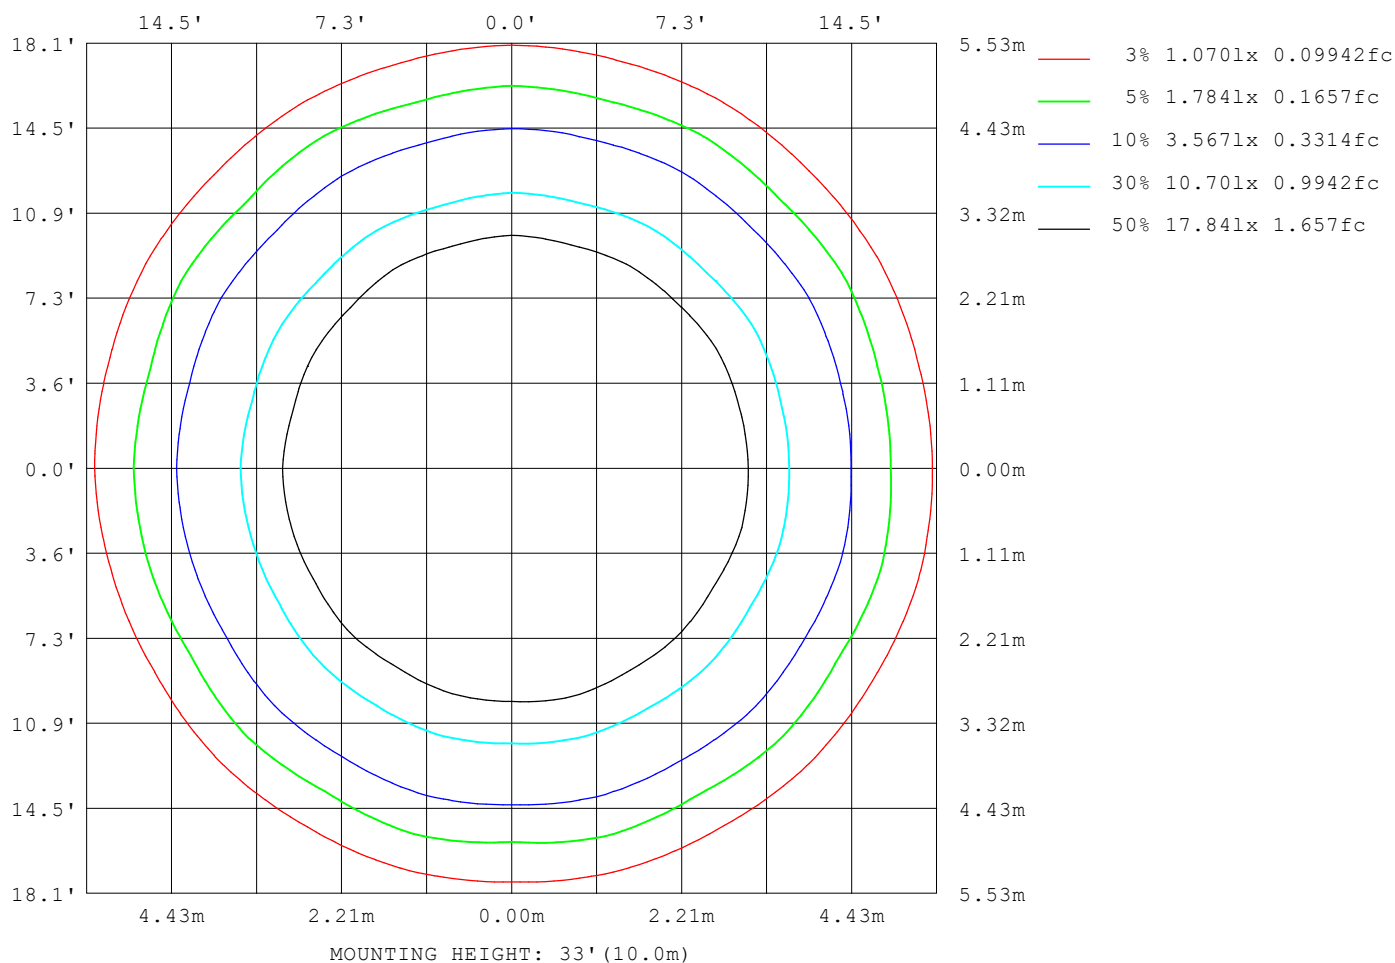

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: AE  
Test Date: 2020-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 7.240m [K=1.0000]  
Remarks:

### LED Avg.L Report

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.: 58	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	9463
L_0~180 (75) av	7197
L_0~180 (85) av	5383
L_90~270 (65) av	9471
L_90~270 (75) av	7189
L_90~270 (85) av	5239
L_45 (65) av	9525
L_45 (75) av	7275
L_45 (85) av	5303

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AE  
Test Date:2020-10-29

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity:65.0%  
Test Distance:7.240m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

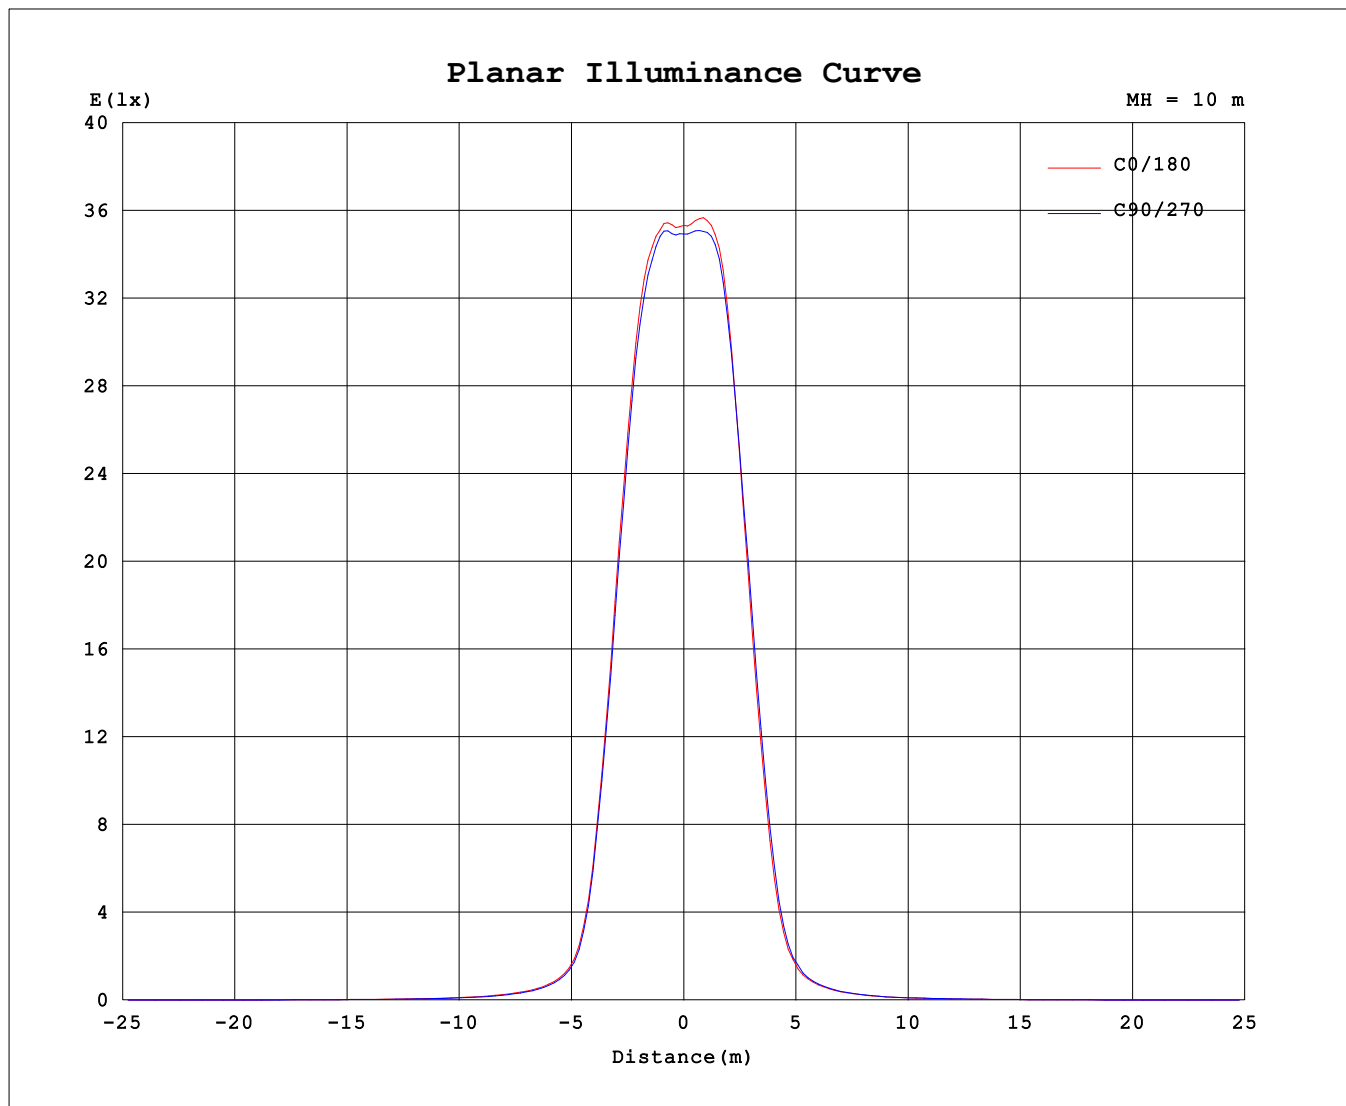

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: AE  
Test Date: 2020-10-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.362  
Humidity: 65.0%  
Test Distance: 7.240m [K=1.0000]  
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

```

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

```