
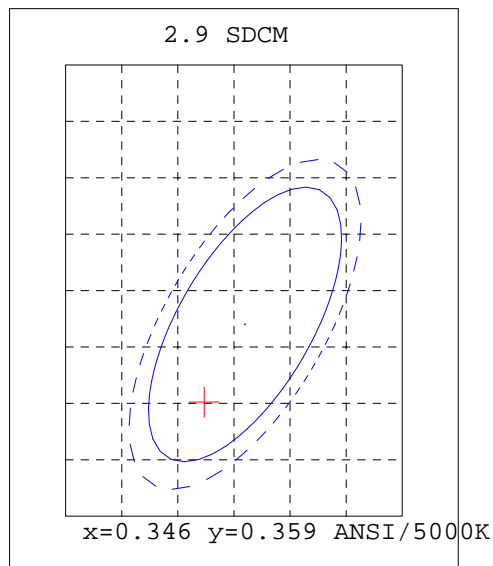


Light Source Test Report

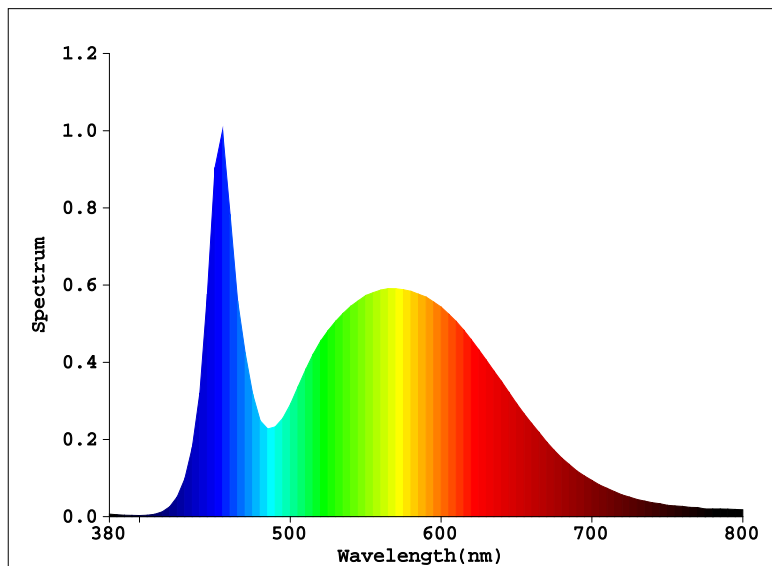

Color Parameters:

Chromaticity Coordinate: $x=0.3424$ $y=0.3521$ $u'=0.2094$ $v'=0.4845$

Tc=5108K Dominant WL:Ld=569.6nm Purity=8.4% Centroid WL:557.0nm

Ratio:R=16.7% G=79.1% B=4.3% Peak WL:Lp=455.0nm HWL:23.7nm

Render Index:Ra=81.9

R1 =80 R2 =88 R3 =91 R4 =80 R5 =80 R6 =81 R7 =87

R8 =69 R9 =12 R10=68 R11=77 R12=55 R13=82 R14=95 R15=77

Photo Parameters:

Flux: 2518.5 lm Fe: 8.0415 W Efficacy:85.66 lm/W

LEVEL: WHITE:OUT

Electrical Parameters:

Luminaire: U=229.6V I=0.1320A P=29.40W PF=0.9670

Instrument Status:

Scan Range:380.0nm-800.0nm Interval:5.0nm[0]

REF=16554(R=3)

%=0.128%

Ip=20918(G=3,D=54)

PMT: 21.2 centigrade [20.6]

Product Type:BL061-30W-850-W-60
Number:45
Temperature:25.3 deg
Test Operator:QiuMing
Software:V2.00.100

Manufacturer:Rayconn
Test Department:Rayconn
Humidity:65.0%
Test Date:2015-12-09 16:49:16
Instrument:PMS-80_V1 (SN:1007026)