

ALTRACK

LED Track Light

RAYCONN®

Norms: EN 60598-1, EN 60598-2-1, EN 62471, EN 62493

Product information



| | |
|--------------------------|-------------------------------------|
| Product number: | ALT554W Series |
| Track System: | 3 wire, 4 wire, 6 wire |
| Input Voltage (v): | 220-240V |
| Dimming: | On/Off, TRIAC, 1-10V, DALI |
| Light source: | COB LED |
| luminaire Lifetime: | 50.000h (L80-B10, Ta25°C) |
| Rotation Angle (degree): | 350 |
| Tilting Angle (degree): | 90 |
| IP Rating: | 20 |
| Working Temperature (°C) | -5 ~ +30 |
| Storage Temperature (°C) | -20 ~ +50 |
| Material: | Aluminium |
| Fitting Colors: | 9016 Sandy White / 9017 Sandy Black |



Wall Washing




Double Asymmetric

Packaging information

| | |
|-------------------------------|-------------|
| N.W. lamp (Kg): | 0.4 |
| G.W. Carton (Kg): | 14 |
| Master carton dimensions(mm): | 515x415x305 |
| Quantity per carton(pcs): | 24 |

| Beam | Watt | CRI | Luminous | CCT | Code |
|------|------|-----|-----------|-------|---------------------|
| W26 | 15W | 90 | 1194.3 lm | 4000K | ALT55W-4NC15G40-W26 |
| | | | 1126.7 lm | 3000K | ALT55W-4NC15G30-W26 |
| | | | 1047.8 lm | 2700K | ALT55W-4NC15G27-W26 |
| D26 | 15W | 90 | 1224.0 lm | 4000K | ALT55D-4NC15G40-D26 |
| | | | 1154.8 lm | 3000K | ALT55D-4NC15G30-D26 |
| | | | 1073.9 lm | 2700K | ALT55D-4NC15G27-D26 |
| W26 | 11W | 90 | 852.9 lm | 4000K | ALT55W-4NC11G40-W26 |
| | | | 804.7 lm | 3000K | ALT55W-4NC11G30-W26 |
| | | | 748.3 lm | 2700K | ALT55W-4NC11G27-W26 |
| D26 | 11W | 90 | 874.2 lm | 4000K | ALT55D-4NC11G40-D26 |
| | | | 824.8 lm | 3000K | ALT55D-4NC11G30-D26 |
| | | | 767.0 lm | 2700K | ALT55D-4NC11G27-D26 |

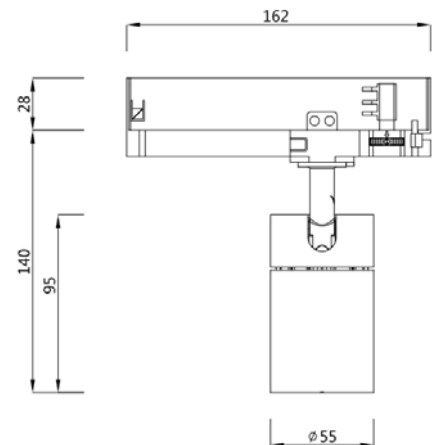

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

Code composition: ALT 55 W - 4 N C 11 G30 - W26 - B

| | | | | | | | | | |
|------------------|---------|----------------|---------------|-------------------|------------|--------|--------------------|-------------------|------------|
| ① Product series | ② Model | ③ App types | ④ Track style | ⑤ Dimming type | ⑥ COB type | ⑦ Watt | ⑧ LED Kelvin & CRI | ⑨ Optical angle | ⑩ Finishes |
| ALT | 55 | W Wall washing | 6 wires | N No dimming | C COB | 15W | H27 2700 >95 | W26 Tilt 26° | White |
| | | | 4 wires | D DALI dimming | | 11W | G30 3000 >90 | D26 Tilt 26° X26° | Black |
| | | | 3 wires | T Triac dimming | | | E40 4000 >80 | | |
| | | | | K Knob dimming | | | C50 5000 >70 | | |
| | | | | C CASAMBI dimming | | | | | |