

exLite Series


**BL071-40W**

Reflector



Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	1200mA, 30-33V
Rated life:	>35,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE/RoHS
Dimmability:	Dimmable Optional
Weight:	1.2 KG

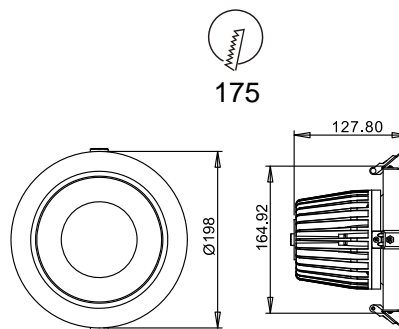



Ordering Information:

White+Black

Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
40W	>80	60°	3367 lm	3000K	●	BL071-40W-830-W-60
			3553 lm	4000K	●	BL071-40W-840-W-60
			3595 lm	5000K	●	BL071-40W-850-W-60
	>90	▲ 60°	2780 lm	3000K	●	BL071-40W-930-W-60
			3075 lm	3000K	●	BL071-40W-930-W-60


Technical Data test pattern

40W	CRI>80			CRI>90		
	LED			Luminaire		
Power	29.5W			39.5W		
Current	1050mA			1200mA		
Luminous Flux	4050lm	4200lm	4200lm	3367lm	3553lm	3595lm
CCT	3000K	4000K	5000K	3000K	4000K	5000K
Color tolerance	3 SDCM / 4 SDCM			3 SDCM		
Service life	>50,000Hrs			>50,000Hrs		
Beam Angle	120°			60°		
Typical Efficiency				88%		
Efficacy	131	135	136	85	90	91

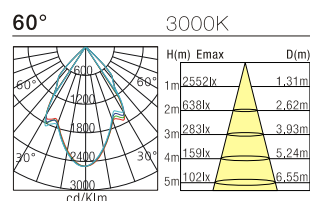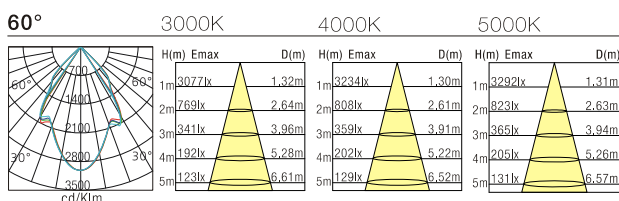


Installation instruction


1,Cut Hole

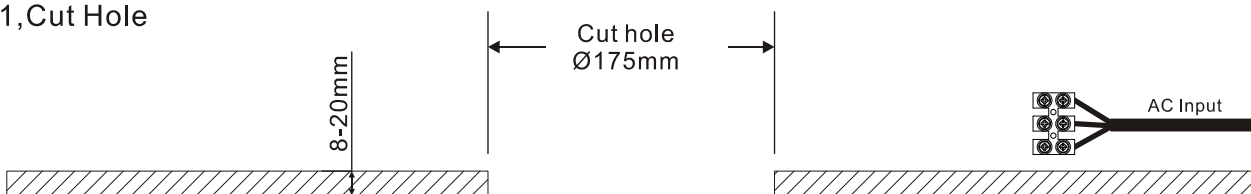

2,Connect Wire

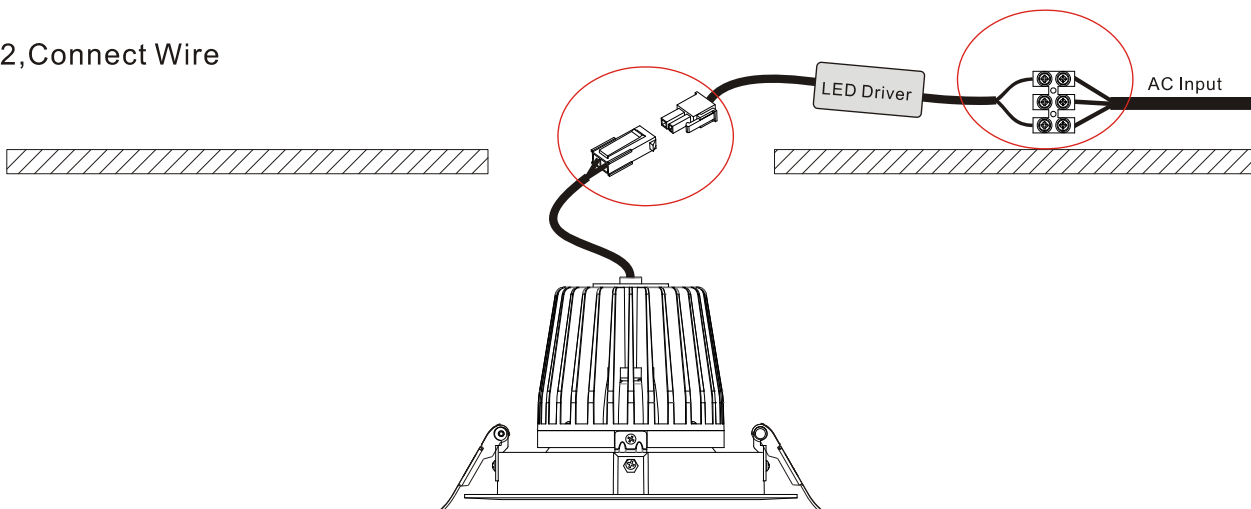

3,Fit the luminaire in the hole

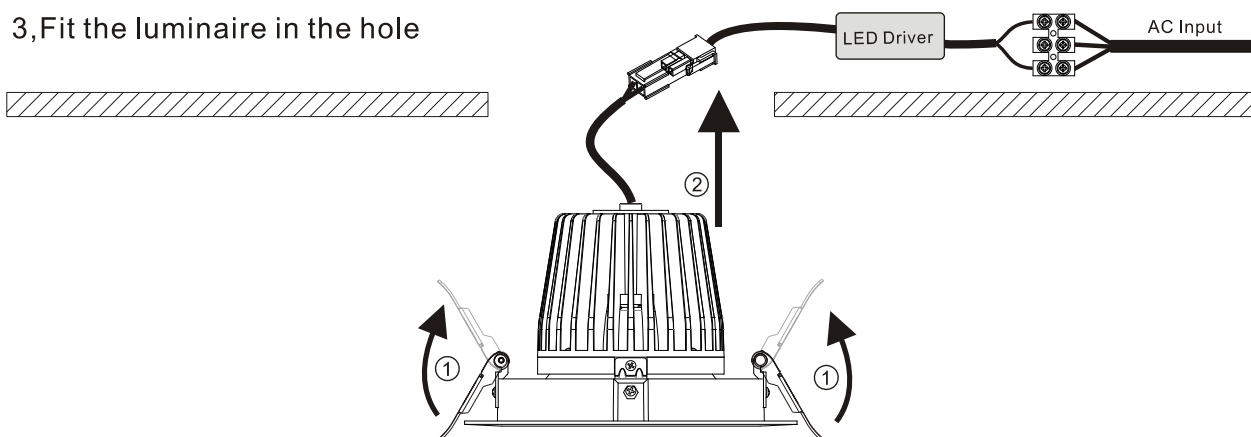

4,Finish

