

Edge Series

**BL50-40W**


Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
Current:	1050mA
Rated life:	>50,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE/RoHS
Weight:	
Package(mm):	



Black

Silver



Ordering Information:

Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
40W	>90	▲ 20°	3005 lm	3000K	○	BL501-40W-930-W-20
			3260 lm	4000K	○	BL501-40W-940-W-20
		▲ 25°	2630 lm	3000K	○	BL501-40W-930-W-25
			2913 lm	4000K	○	BL501-40W-940-W-25
		▲ 40°	2923 lm	3000K	○	BL501-40W-930-W-40
			3286 lm	4000K	○	BL501-40W-940-W-40




○ White+ Gray

Technical Data test pattern

**CRI>90**

**40W**

	<b>LED</b>	<b>Luminaire</b>
<b>Power</b>	24.5W	40W
<b>Current</b>	720mA	1050mA
<b>Flux</b>		3005lm    3286lm
<b>CCT</b>	3000K    4000K	3000K    4000K
<b>Color tolerance</b>	3 SDCM	
<b>Service life</b>	>50000Hrs	>50000Hrs
<b>Beam Angle</b>	120°	20°/25°/40°
<b>Typical Efficiency</b>		>85%
<b>Efficacy(lm/W)</b>		75      82

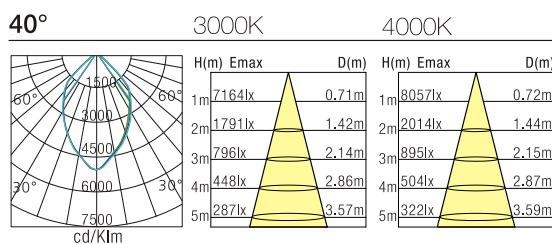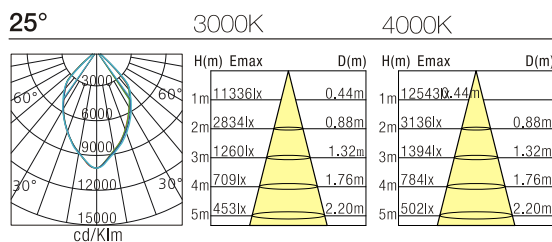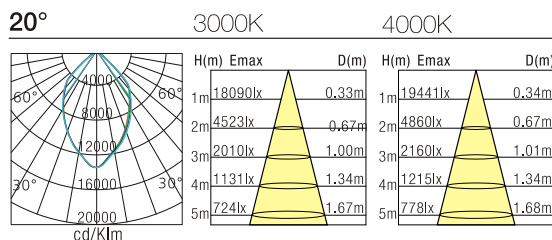

Product naming system

