


veraLite Series

DL29-40W

Optical Lens



Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
Current:	1000mA
Rated life:	>50,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE/RoHS
Weight:	
Package(mm):	

Ordering Information:







○ White

Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
40W	>80	▲ 17°	4480lm	3000K	○	DL291-40W-830-W-17
			4920lm	4000K	○	DL291-40W-840-W-17
		▲ 24°	4350lm	3000K	○	DL291-40W-830-W-24
			4652lm	4000K	○	DL291-40W-840-W-24
		▲ 38°	4593lm	3000K	○	DL291-40W-830-W-38
			4960lm	4000K	○	DL291-40W-830-B-38
	>90	▲ 17°	3950lm	3000K	○	DL291-40W-830-W-17
			4190lm	4000K	○	DL291-40W-840-W-17
		▲ 24°	3800lm	3000K	○	DL291-40W-830-W-24
			4082 lm	4000K	○	DL291-40W-840-W-24
		▲ 38°	4090 lm	3000K	○	DL291-40W-830-W-38
			4310 lm	4000K	○	DL291-40W-830-B-38

Technical Data test pattern


40W	CRI>80			CRI>90		
	LED			Luminaire		
Power	24.5W			40W		
Current	720mA			1000mA		
Flux	3612lm	3706lm	3749lm	4593lm	4960lm	
CCT	3000K	4000K	5000K	3000K	4000K	
Color tolerance	3 SDCM					
Service life	>50000Hrs			>50,000Hrs		
Beam Angle	120°			17°\24°\38°		
Typical Efficiency				85%		
Efficacy (lm/W)	148	151	153	114	124	

40W	CRI>80			CRI>90		
	LED			Luminaire		
Power	24.5W			40W		
Current	720mA			1000mA		
Flux	3095lm	4090lm	4310lm	3095lm	4090lm	4310lm
CCT	3000K	4000K	5000K	3000K	4000K	
Color tolerance	3 SDCM					
Service life	>50000Hrs			>50,000Hrs		
Beam Angle	120°			17°\24°\38°		
Typical Efficiency				85%		
Efficacy (lm/W)	126	102	107	126	102	107

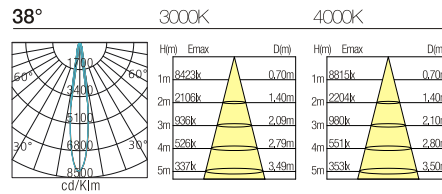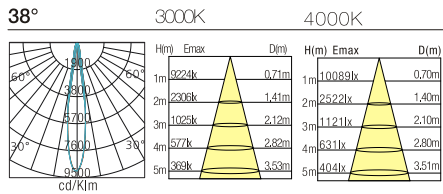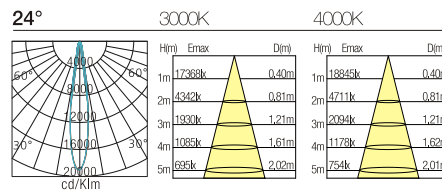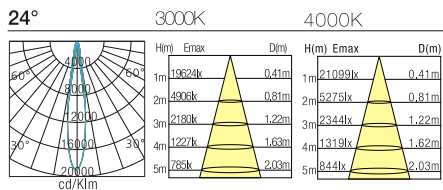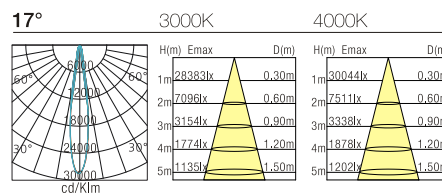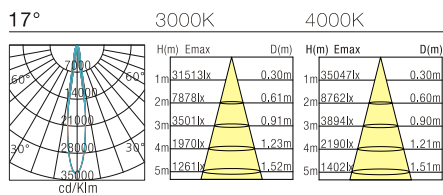


Installation Instruction


1, Cut Hole

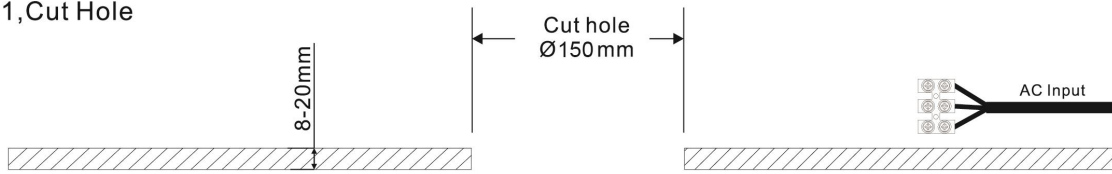


2, Connect Wire

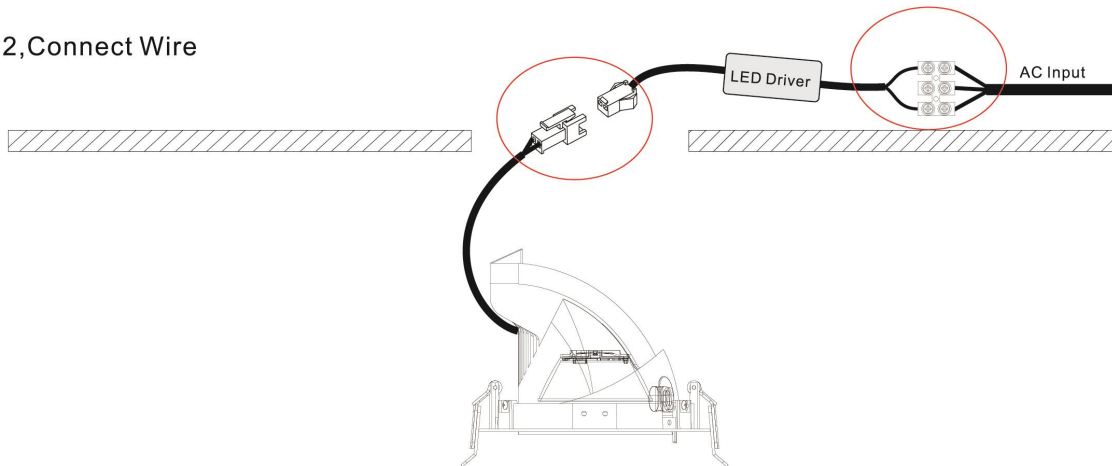

3, Fit the luminaire in the hole

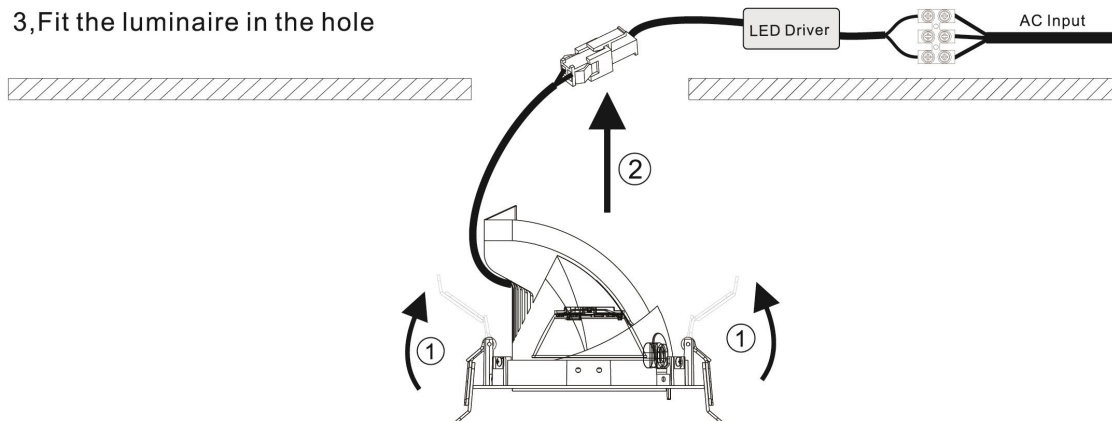

4, Finish

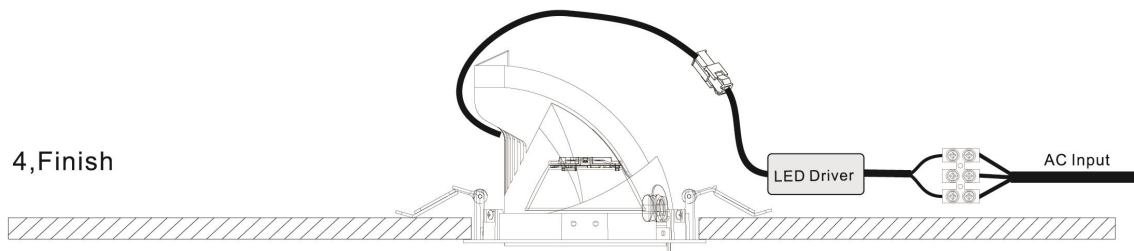

Product Nomenclature

DL (X) XX X (H) – X – X XX – X- XX

