



IMSSeries

IMS-GL01 1x15W/2x15W/3X15W

Reflector+Lens

Technical Parameters:

Name	Parameters		
Lightsource:	COB		
InputVoltage:	AC220~240V 50/60Hz		
Current:(Adjustable)	350mA	350mA	350mA
	1x15W	2x15w	3x15w
Ratedlife:	>50,000 hours		
Operatingtemperature:	-20℃~40℃		
Storage temperature:	-30℃~60℃		
Certificate:			
Dimmability:	DimmableOptional		

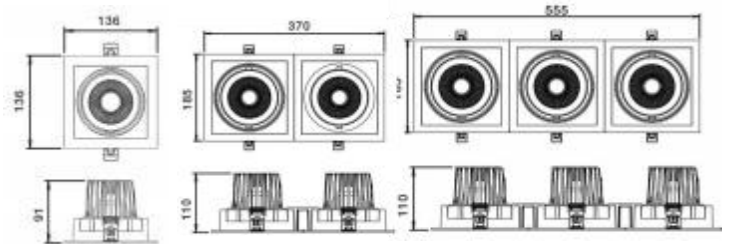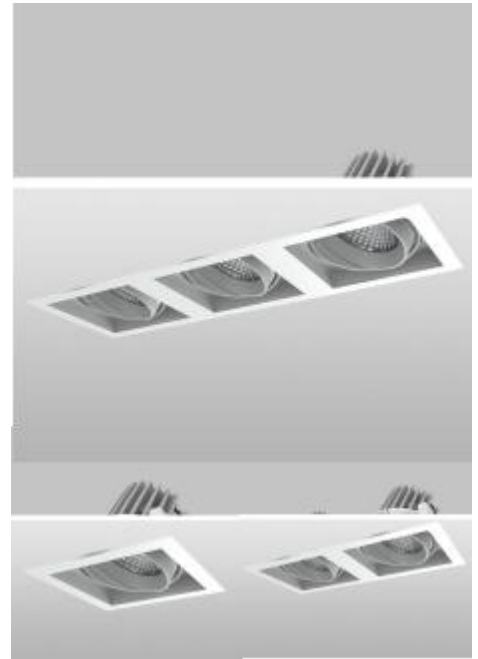

Ordering Information:


● Silvergray

Power	CRI	BeamAngle	Luminous	CCT	Housing	PartNumber			
1x15W	80	▲ 15°	1690 lm	3000K	●	IMS-GL0111-15W-830-S-15			
			1700 lm	4000K	●	IMS-GL0111-15W-840-S-15			
		▲ 28°	1695 lm	3000K	●	IMS-GL0111-15W-830-S-28			
			1710 lm	4000K	●	IMS-GL0111-15W-840-S-28			
		▲ 36°	1690 lm	3000K	●	IMS-GL0111-15W-830-S-36			
			1706 lm	4000K	●	IMS-GL0111-15W-840-S-36			
	>90	>90	▲ 15°	1394 lm	3000K	●	IMS-GL0111-15W-930-S-15		
			▲ 28°	1386 lm	3000K	●	IMS-GL0111-15W-930-S-28		
			▲ 36°	1396 lm	3000K	●	IMS-GL0111-15W-930-S-36		
			2x15W	>80	▲ 15°	2700 lm	3000K	●	IMS-GL0121-15W-830-S-15
						2720 lm	4000K	●	IMSGL0121-15W-840-S-15
					▲ 28°	2730 lm	3000K	●	IMS-GL0121-15W-830-S-28
	2692 lm	4000K			●	IMS-GL0121-15W-840-S-28			
▲ 36°	2706 lm	3000K			●	IMS-GL0121-15W-830-S-36			
	2704lm	4000K			●	IMS-GL0121-15W-840-S-36			
>90	>90	▲ 15°	2232 lm	3000K	●	IMS-GL0121-15W-930-S-15			
		▲ 28°	2220 lm	3000K	●	IMS-GL0121-15W-930-S-28			
		▲ 36°	2233 lm	3000K	●	IMS-GL0121-15W-930-S-36			




Technical Data test pattern


15W CRI80 15°

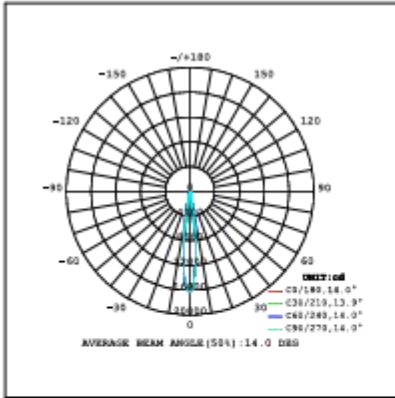


3000K

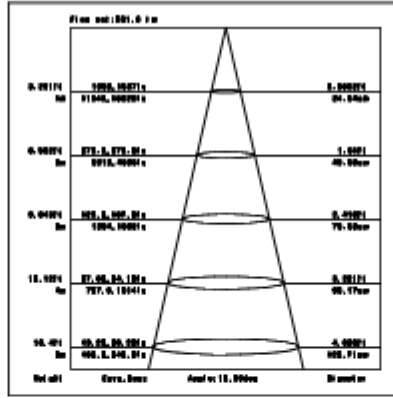


4000K

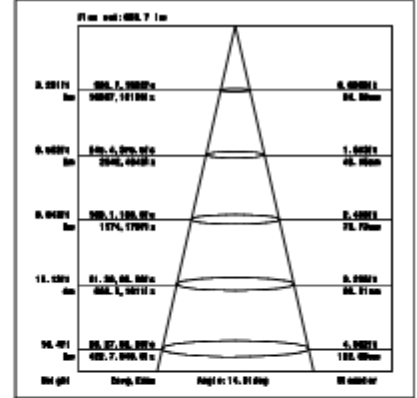


15W CRI80 28°

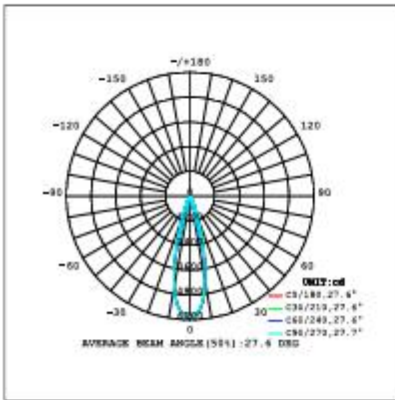


3000K

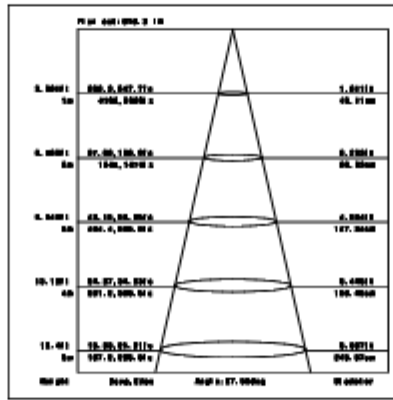


4000K

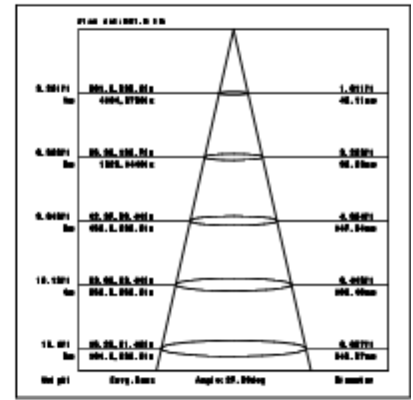


15W CRI80 36°

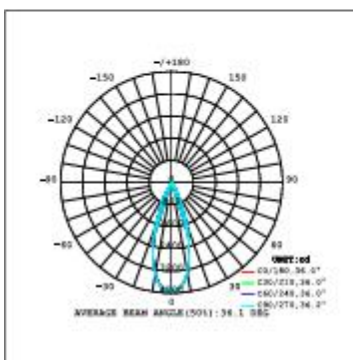


3000K

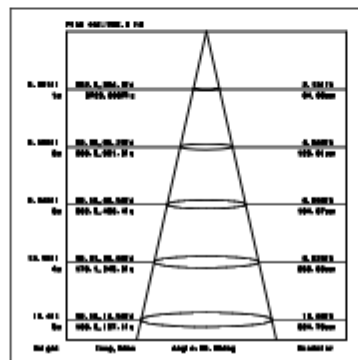



4000K

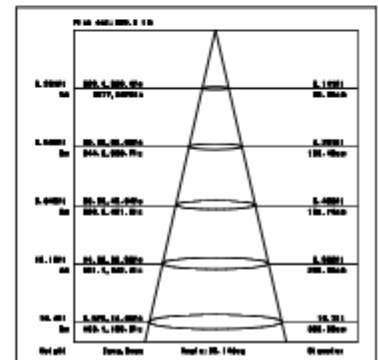


15W CRI90 15°

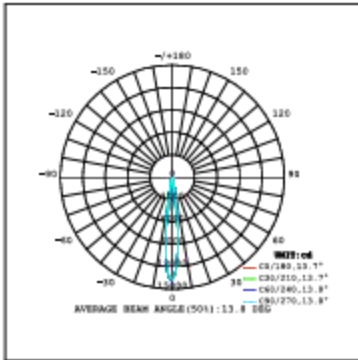



3000K

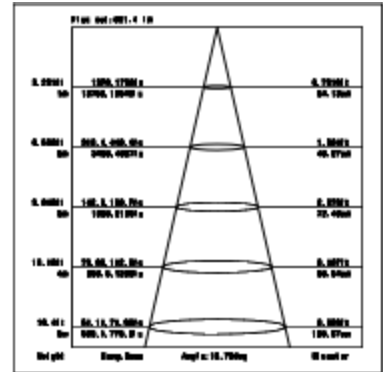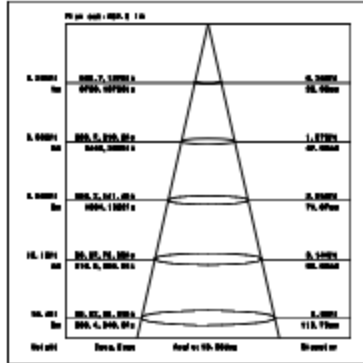


15W CRI90 28°

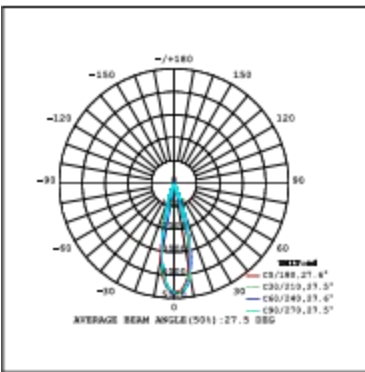



3000K

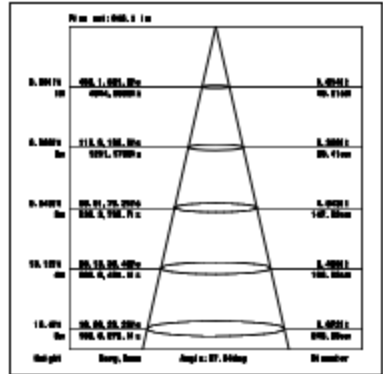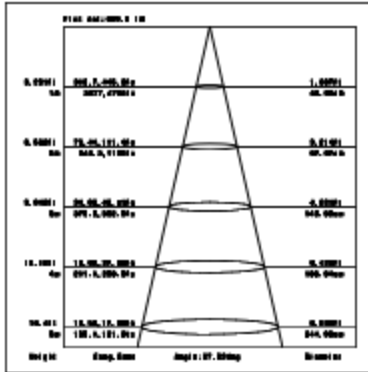




15W CRI90 36°

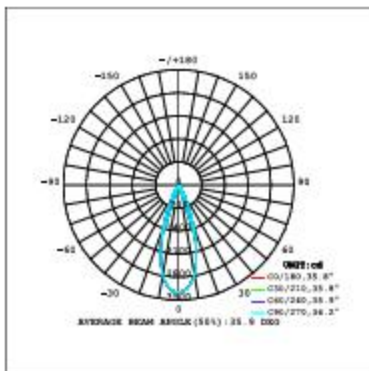

3000K

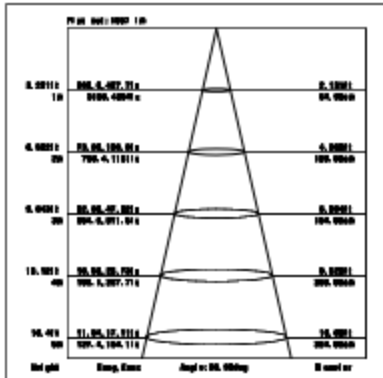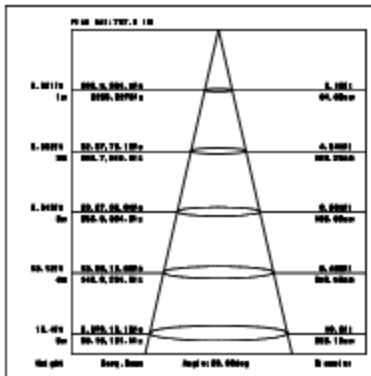


Installation instruction

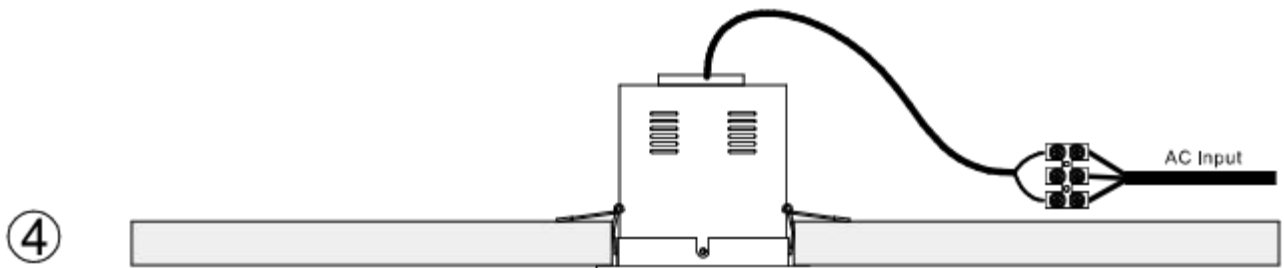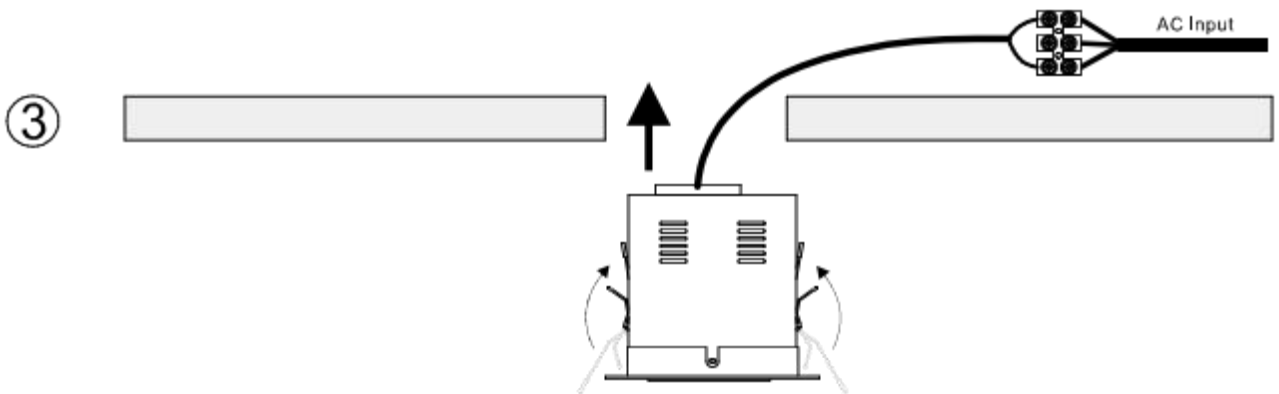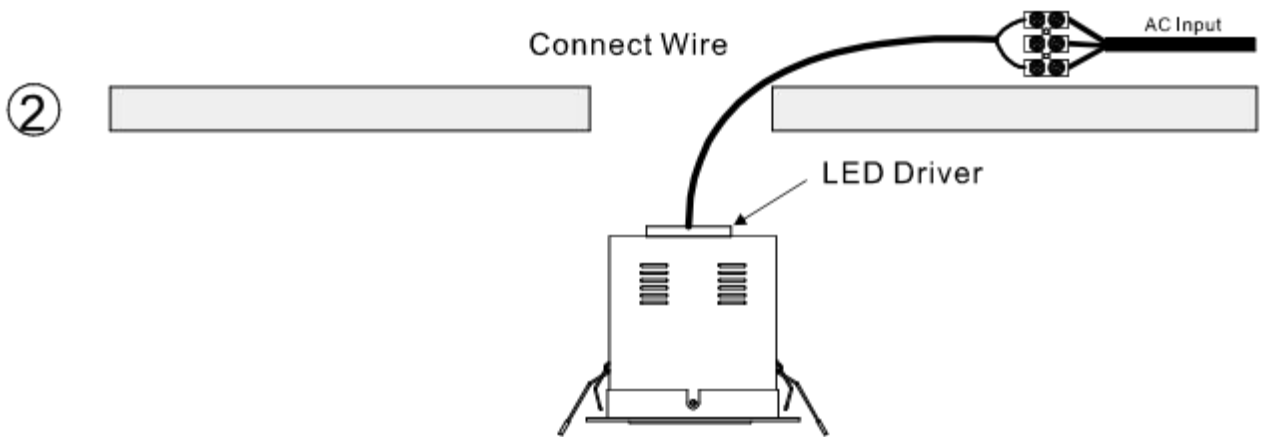


Packaging:

IMS-GL0111(Without driver)




Box
L170*W170*H160mm
1pc/box
GW: 0.9kg/box




Outer carton
L700*W355*H385mm
16pcs/CTN
GW: 15.5kg/carton

IMS-GL0121(Without driver)




Box
L230*W140*H280mm
1pc/box
GW: 1.75kg/box




Outer carton
L720*W295*H280mm
6pcs/CTN
GW: 11.5kg/carton

IMS-GL0131(Without driver)



Box
L340*W140*H130mm
1pc/box
GW: 2.7kg/box



Outer carton
L720*W295*H280mm
8pcs/CTN
GW: 22.6kg/carton

Product naming system

DL (X) XX X (H) – XW – X XX – X- XX

