

Halolite Series


M03-11W

Reflector



Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
Current:	250mA
Rated life:	>50,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE/RoHS
Dimmability:	Dimmable Optional
Weight:	0.19KG (M031) / 0.24KG (M0312) 0.28KG (M0313) / 0.29KG (M0314) 0.29KG (M0315) / 0.31KG (M0316)

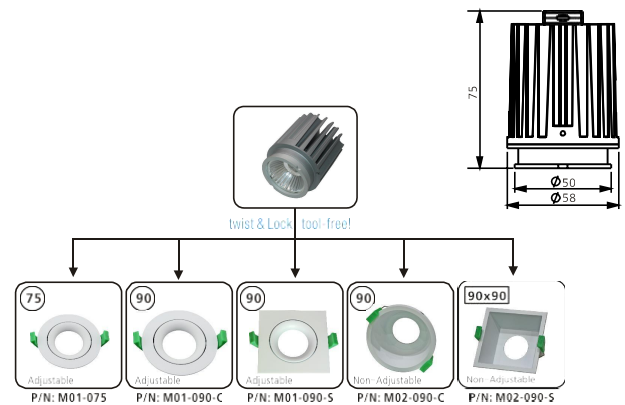

Ordering Information:


○ Silver gray

Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number	
11W	82	16°	1150 lm	3000K		M031*-11W-830-S-16	
			1170 lm	4000K		M031*-11W-840-S-16	
		▲ 28°	1120 lm	3000K		M031*-11W-830-S-28	
			1150 lm	4000K		M031*-11W-840-S-28	
		▲ 40°	1070 lm	3000K		M031*-11W-830-S-40	
			1170 lm	4000K		M031*-11W-840-S-40	
	>90		▲ 60°	1150 lm	3000K		M031*-11W-830-S-60
				1150 lm	4000K		M031*-11W-840-S-60
			▲ 16°	950 lm	3000K		M031*-11W-930-S-16
				1060 lm	4000K		M031*-11W-940-S-16
			▲ 28°	930 lm	3000K		M031*-11W-930-S-28
				1040 lm	4000K		M031*-11W-940-S-28
▲ 40°	940 lm	3000K		M031*-11W-930-S-40			
	1060 lm	4000K		M031*-11W-940-S-40			
▲ 60°	930 lm	3000K		M031*-11W-930-S-60			
	870 lm	4000K		M031*-11W-940-S-60			


**": 1: S-MR16; 2: M01-075; 3: M01-090-C; 4: M01-090-S; 5: M02-090-C; 6: M02-090-S

Technical Data test pattern


CRI82 16°

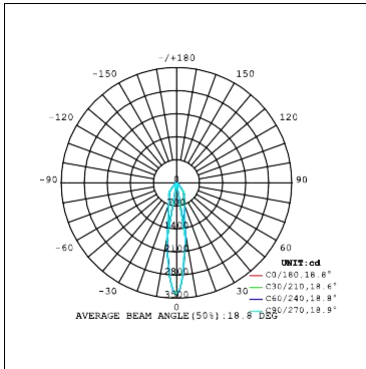


3000K

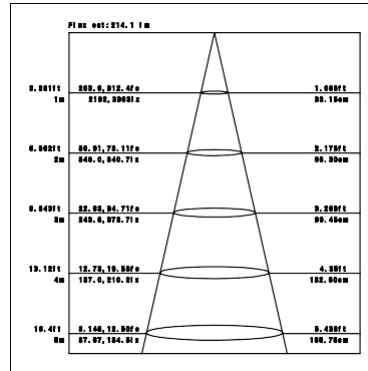


4000K

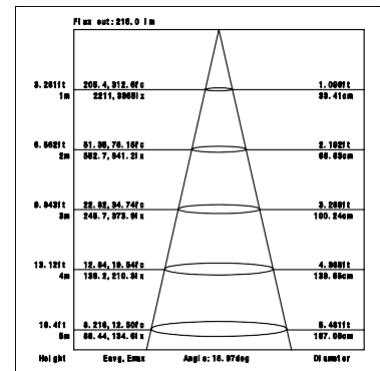


CRI82 28°

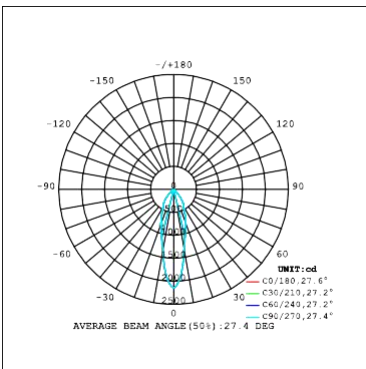


3000K

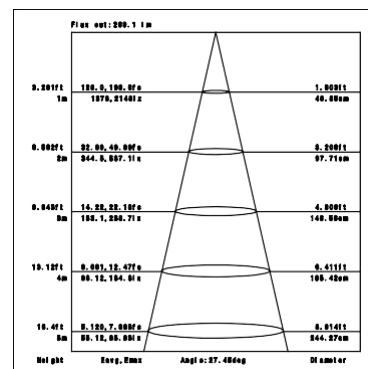


4000K

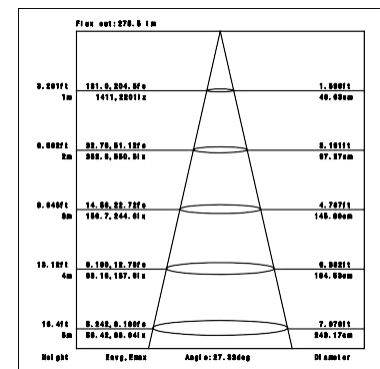


CRI82 40°

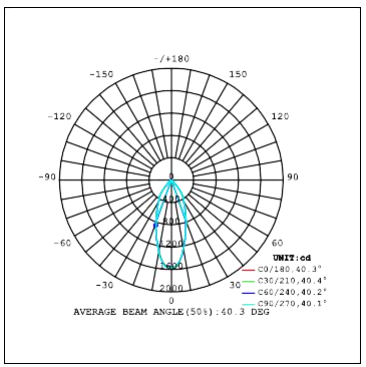


3000K

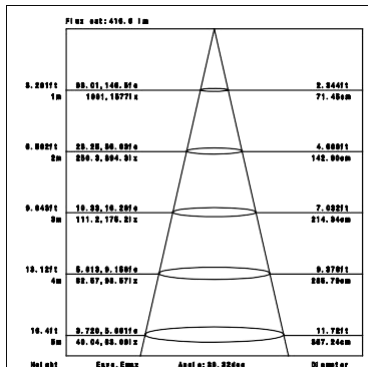


4000K

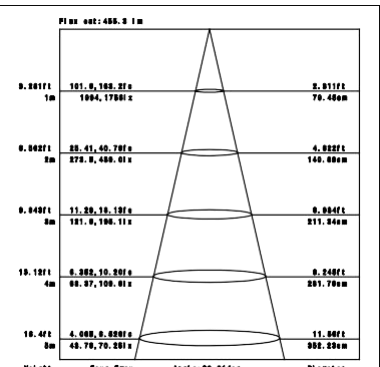


CRI82 60°

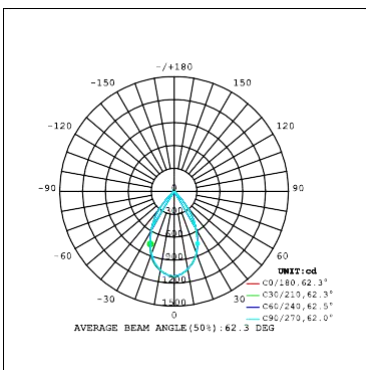


3000K

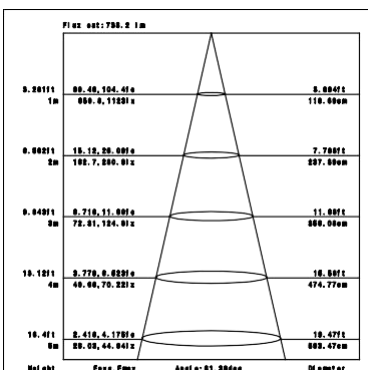


4000K

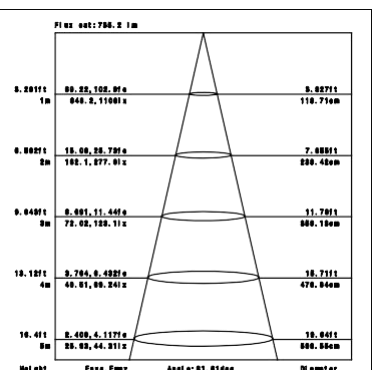


CRI90 16°

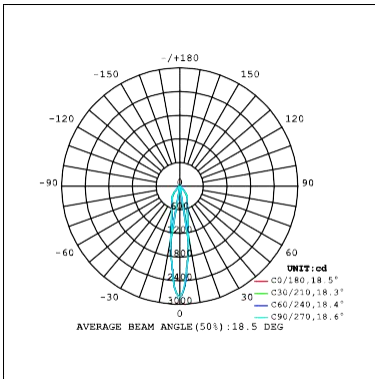


3000K

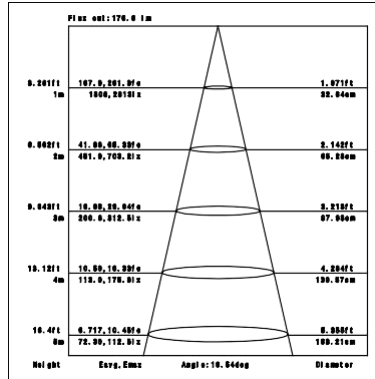


4000K

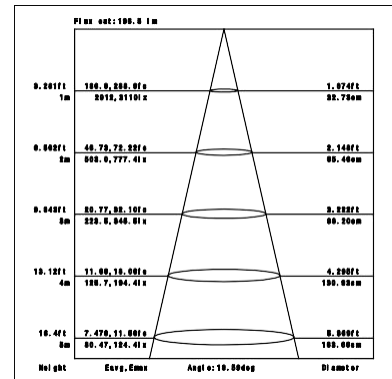


CRI90 28°

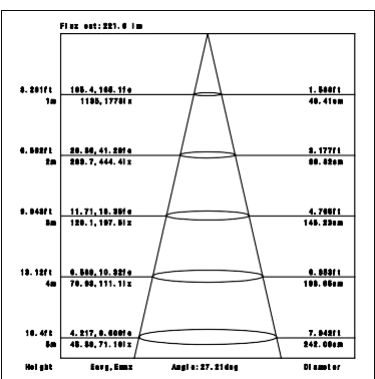


3000K

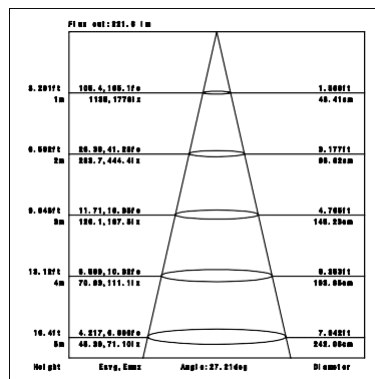


4000K

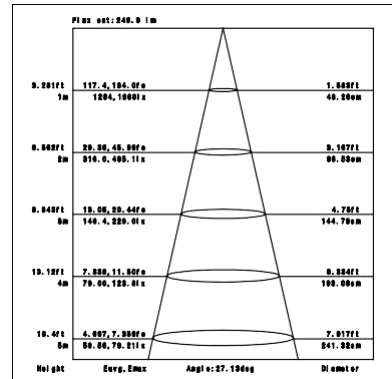


CRI90 40°

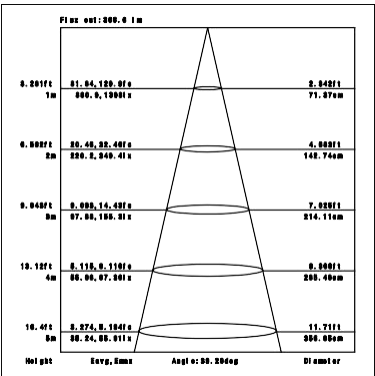


3000K

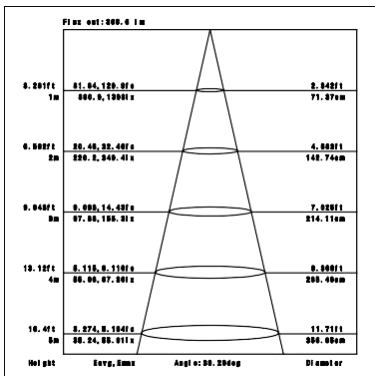


4000K

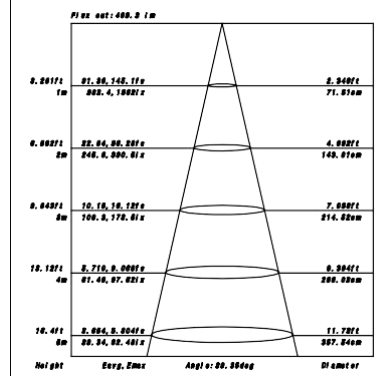


CRI90 60°

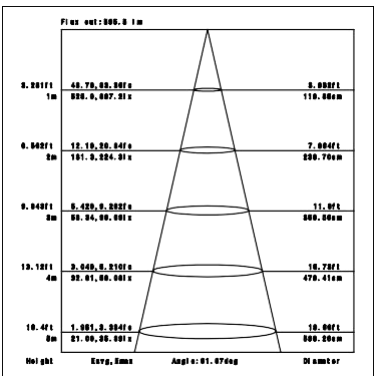



3000K

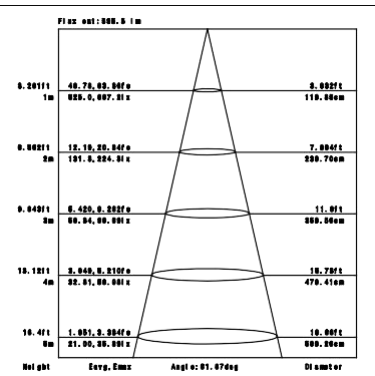

4000K


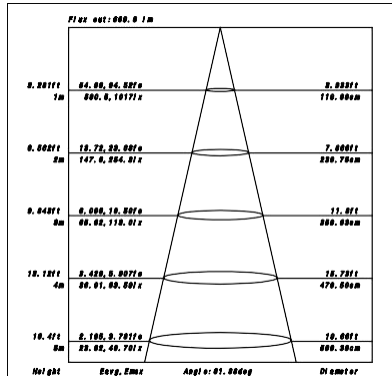


Installation instruction

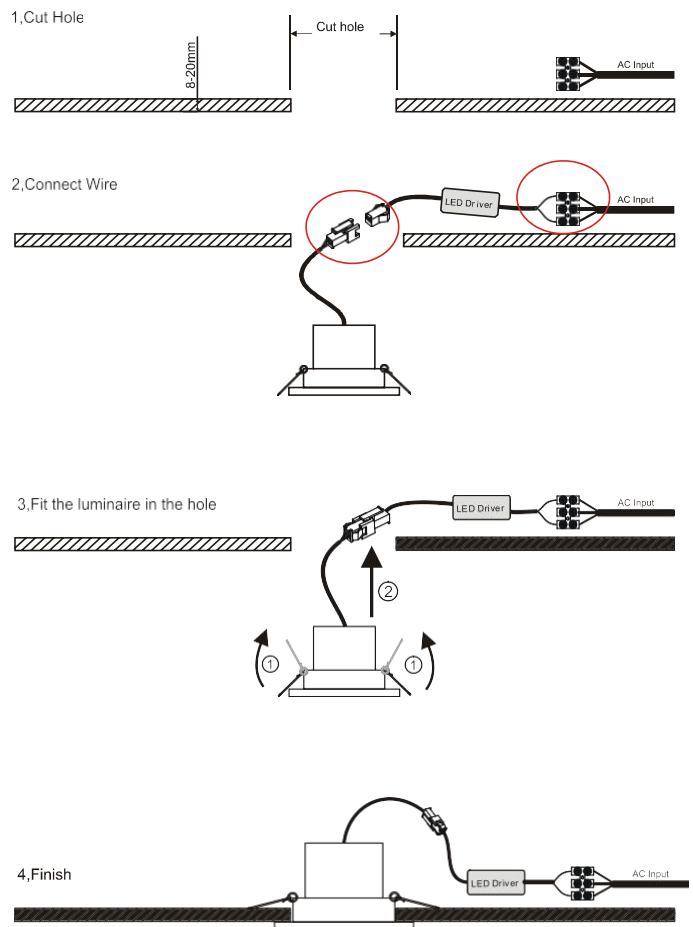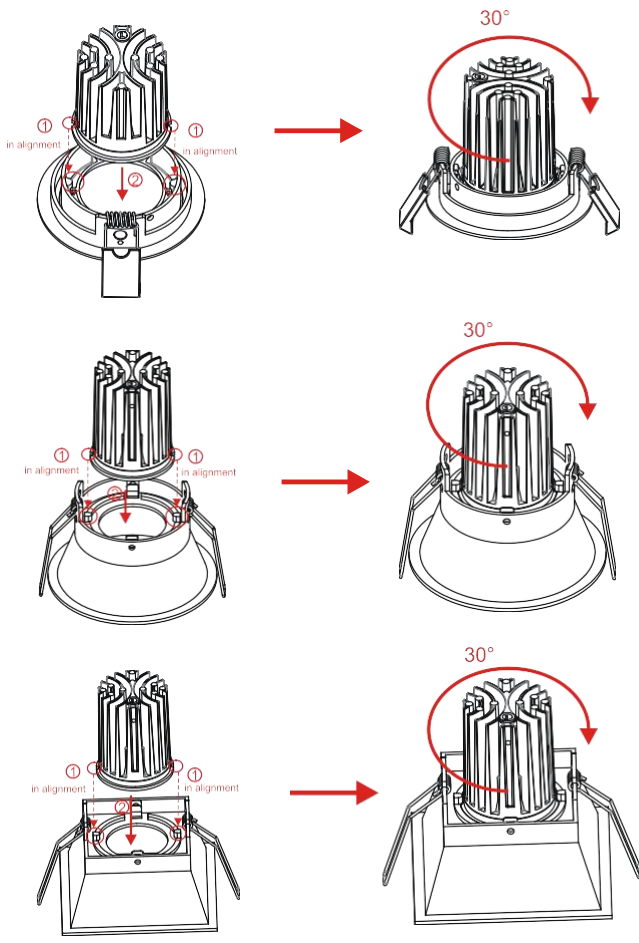

Packaging:



M031 (Without driver)



Box
L96*W65*H140mm
1pc/box
GW: 0.25kg/box

Outer carton
L600*W300*H230mm
36pcs/CTN
GW: 10kg/carton


M031 (With driver)




Box
L96*W65*H140mm
1pc/box
GW: 0.3kg/box

Outer carton
L600*W300*H230mm
36pcs/CTN
GW: 11.5kg/carton

M0312




Box
 L105*W105*H130mm
 1pc/box
 GW: 0.35kg/box




Outer carton
 L450*W450*H410mm
 48pcs/CTN
 GW: 18kg/carton

M0313




Box
 L105*W105*H130mm
 1pc/box
 GW: 0.35kg/box




Outer carton
 L450*W450*H410mm
 48pcs/CTN
 GW: 18kg/carton

M0314/M0316




Box
 L130*W130*H120mm
 1pc/box
 GW: 0.4kg/box




Outer carton
 L540*W420*H280mm
 24pcs/CTN
 GW: 10.5kg/carton

M0315



Box
 L105*W105*H130mm
 1pc/box
 GW: 0.4kg/box



Outer carton
 L450*W450*H410mm
 48pcs/CTN
 GW: 18.5kg/carton

Product Nomenclature

