


Pro Series

**SD031-40W**

Reflector

Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	1000mA, 35-37V
Rated life:	>50,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE/RoHS
Dimmability:	NON-Dimmable
Weight:	1.80KG

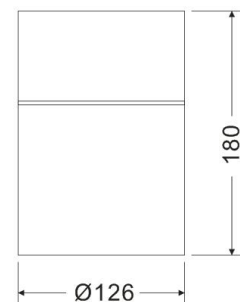


Ordering Information:

○ White ● Black


Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
40W	>80	▲ 12°	4140 lm	3000K	○	SD031-40W-830-W-12
					●	SD031-40W-830-B-12
		4420 lm	4000K	○	SD031-40W-840-W-12	
				●	SD031-40W-840-B-12	
		▲ 20°	4180 lm	3000K	○	SD031-40W-830-W-20
					●	SD031-40W-830-B-20
	4350 lm	4000K	○	SD031-40W-840-W-20		
			●	SD031-40W-840-B-20		
	▲ 45°	4030 lm	3000K	○	SD031-40W-830-W-45	
				●	SD031-40W-830-B-45	
	4140 lm	4000K	○	SD031-40W-840-W-45		
			●	SD031-40W-840-B-45		
>90	▲ 12°		3530 lm	3000K	○	SD031-40W-930-W-12
					●	SD031-40W-930-B-12
		3700 lm	4000K	○	SD031-40W-940-W-12	
				●	SD031-40W-940-B-12	
		▲ 20°	3550 lm	3000K	○	SD031-40W-930-W-20
					●	SD031-40W-930-B-20
	3740 lm	4000K	○	SD031-40W-940-W-20		
			●	SD031-40W-940-B-20		
	▲ 45°	3400 lm	3000K	○	SD031-40W-930-W-45	
				●	SD031-40W-930-B-45	
	3650 lm	4000K	○	SD031-40W-940-W-45		
			●	SD031-40W-940-B-45		

Technical Data test pattern


CRI80 12°

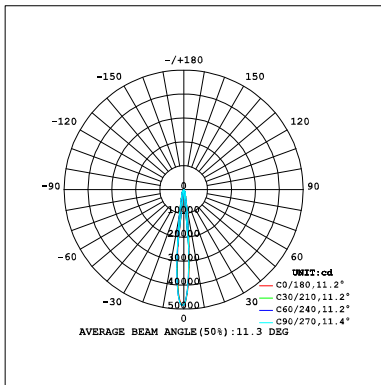


3000K

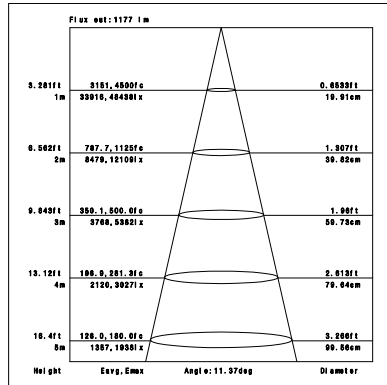


4000K

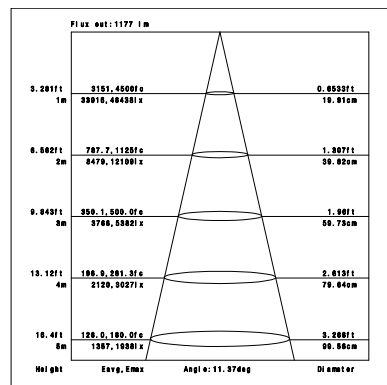


CRI80 20°

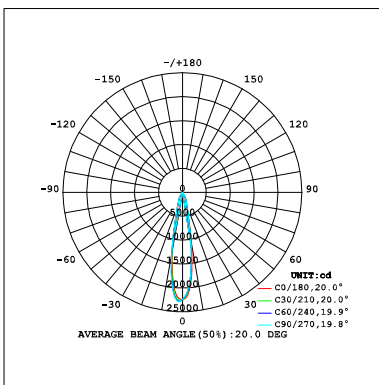


3000K

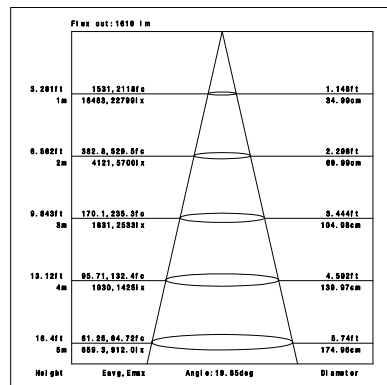


4000K

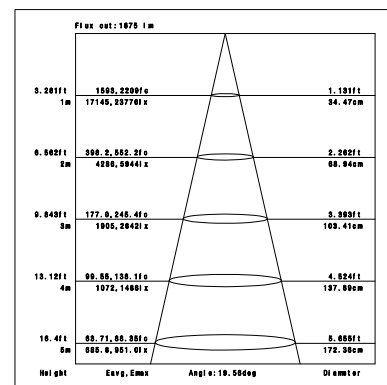


CRI80 45°

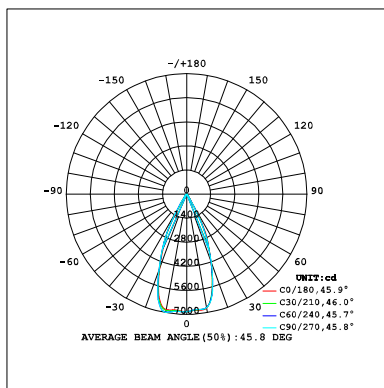


3000K

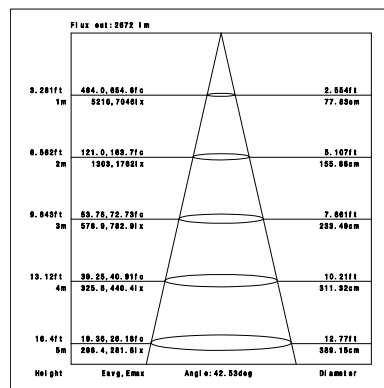


4000K

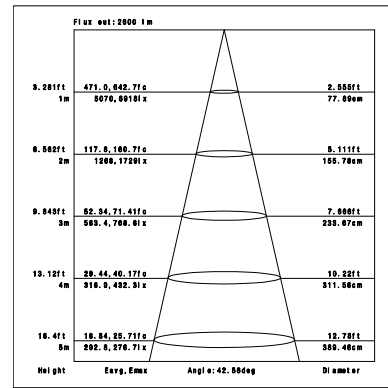


CRI90 12°

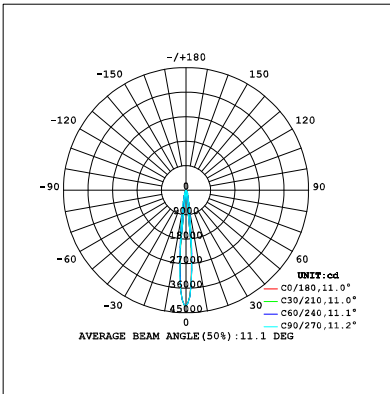


3000K

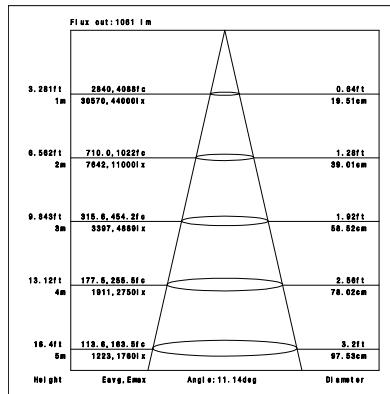


4000K

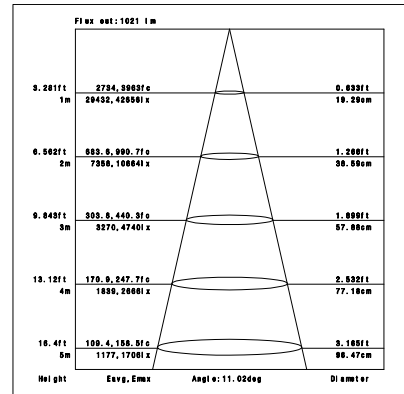


CRI90 20°

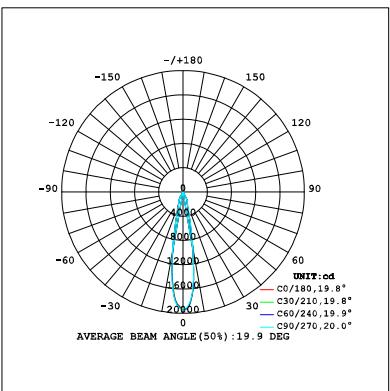


3000K

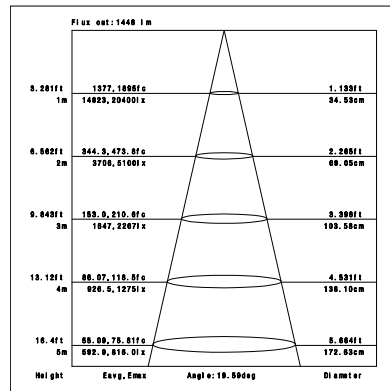


4000K

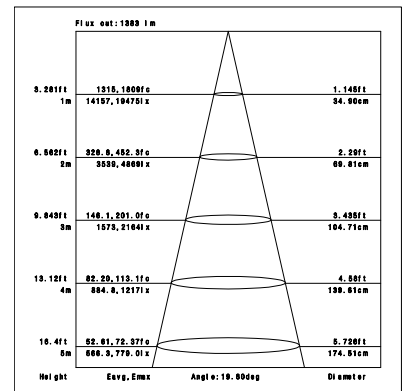


CRI90 45°

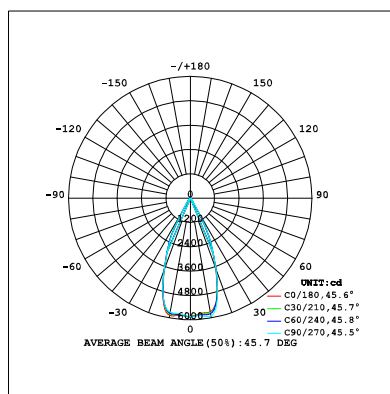


3000K

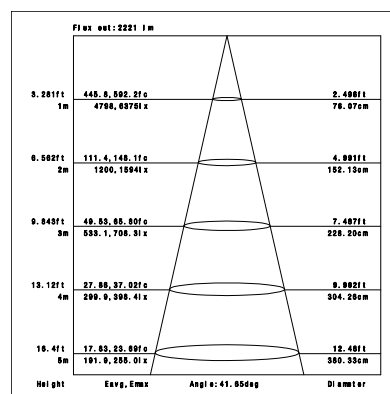


4000K

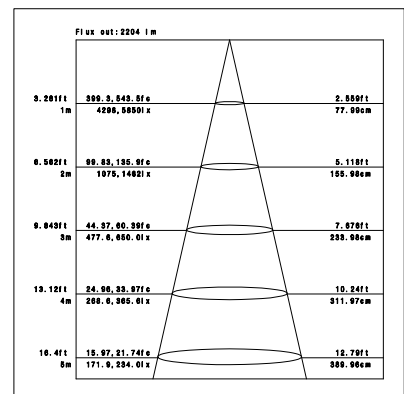


Installation instruction

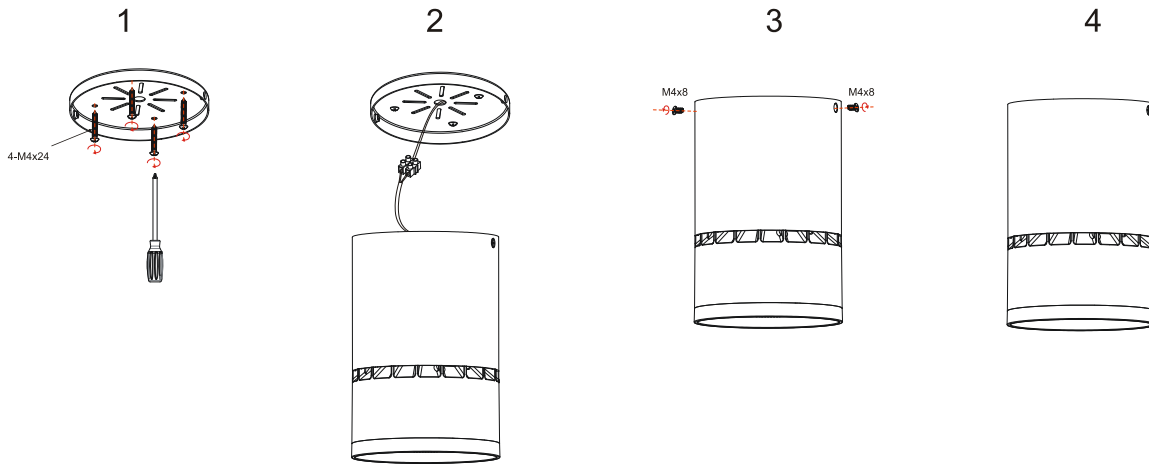

Packaging:




**Box**  
 L140\*W140\*H205mm  
 1pc/box  
 GW: 1.95kg/box

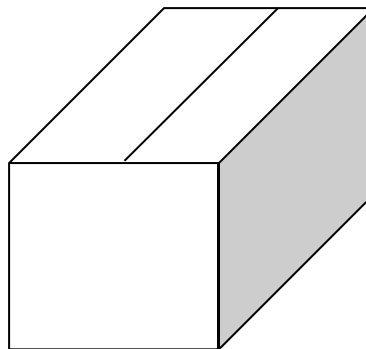

**Outer carton**  
 L730xW310xH220mm  
 10 pcs/CTN  
 GW: 21kg/carton

Product Nomenclature

**SD ( X ) XX X (H) - X - X XX - X- XX**

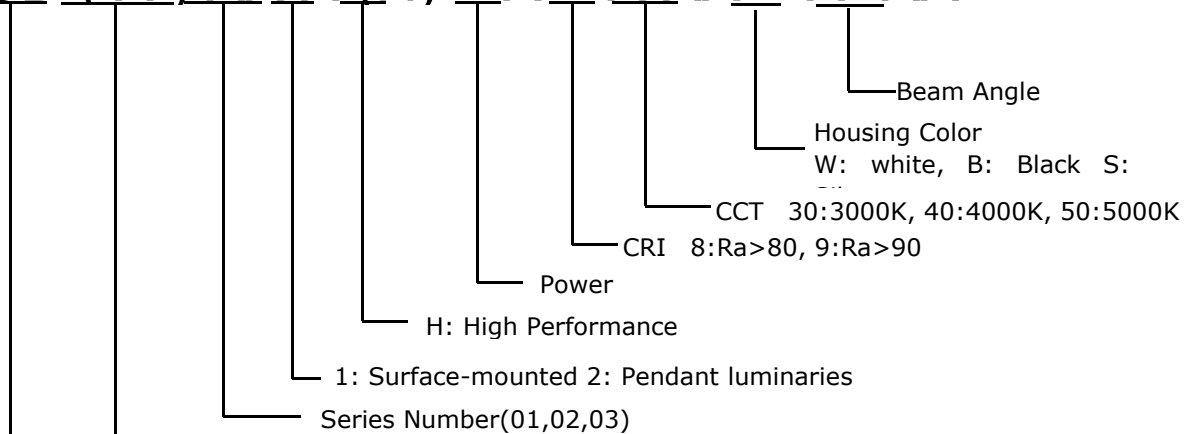

04

□: Non-dimmable  
 D: Dimmable