
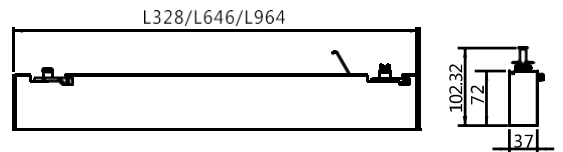


TL-L328A/L646A /L964A

Technical Parameters:

Name	Parameters		
Light source:	3030SMD		
Input Voltage:	AC100~277V 50/60Hz		
Power	15W	30W	40W
LED Current:	350mA	700mA	1000mA
Rated life:	>50,000 hours		
Operating temperature:	-20°C~40°C		
Storage temperature:	-30°C~60°C		
Certificate:	CE/RoHS		
Dimmability:	Non-dimmable 0-10V dimming		
Weight:	0.8KG (L328) 1.4KG (L646) 2.0KG (L964)		

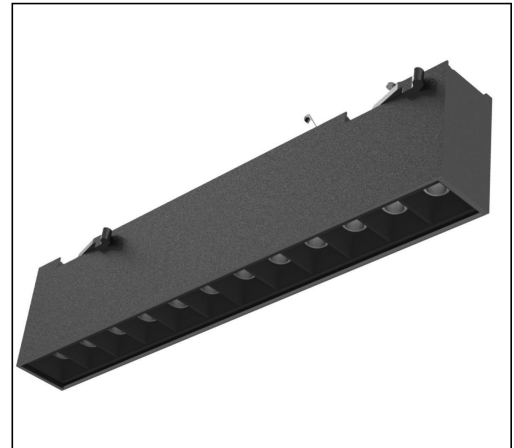

Ordering Information:




Length	Power	CRI	Beam Angle	Luminous	CCT	Housing		Part Number
						○ White	● Black	
328mm	15W	>80	15°/24°/36°/15x35°	1200 lm	2700K	○	●	TL-L328A-15W-827-W-**
						○	●	TL-L328A-15W-827-B-**
				1300 lm	3000K	○	●	TL-L328A-15W-830-W-**
						○	●	TL-L328A-15W-830-B-**
				1400 lm	4000K	○	●	TL-L328A-15W-840-W-**
						○	●	TL-L328A-15W-840-B-**
646mm	30W	>80	15°/24°/36°/15x35°	2300 lm	2700K	○	●	TL-L646A-30W-827-W-**
						○	●	TL-L646A-30W-827-B-**
				2400 lm	3000K	○	●	TL-L646A-30W-830-W-**
						○	●	TL-L646A-30W-830-B-**
				2450 lm	4000K	○	●	TL-L646A-30W-840-W-**
						○	●	TL-L646A-30W-840-B-**
964mm	40W	>80	15°/24°/36°/15x35°	3100 lm	2700K	○	●	TL-L964A-40W-827-W-**
						○	●	TL-L964A-40W-827-B-**
				3150 lm	3000K	○	●	TL-L964A-40W-830-W-**
						○	●	TL-L964A-40W-830-B-**
				3200 lm	4000K	○	●	TL-L964A-40W-840-W-**
						○	●	TL-L964A-40W-840-B-**

***: Angle 15/24/36/15x35






Technical Data test pattern

L328A

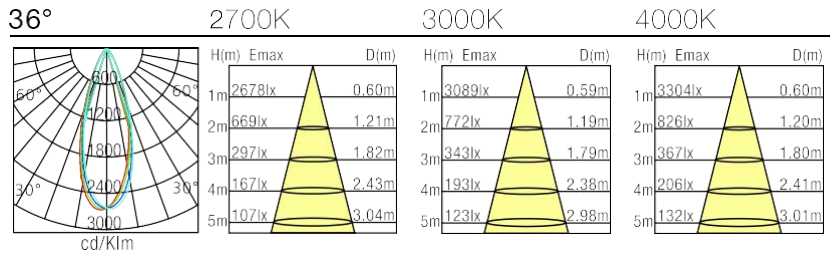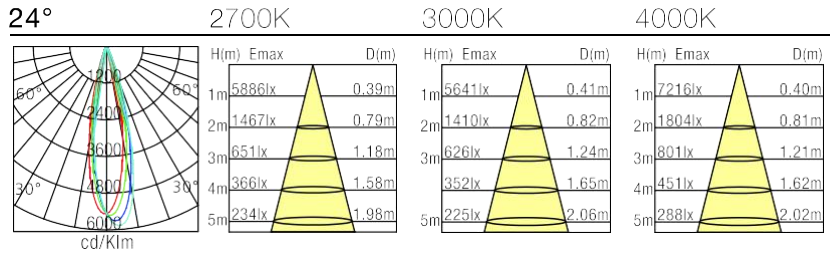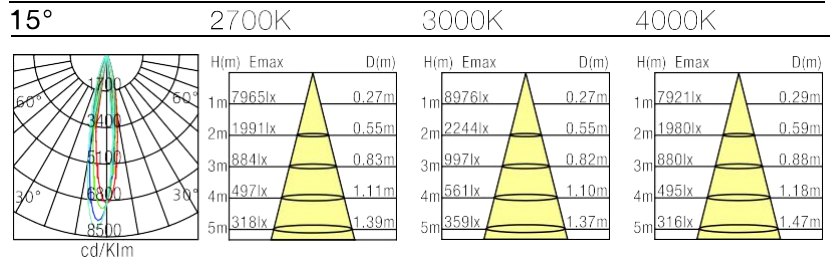

L646A

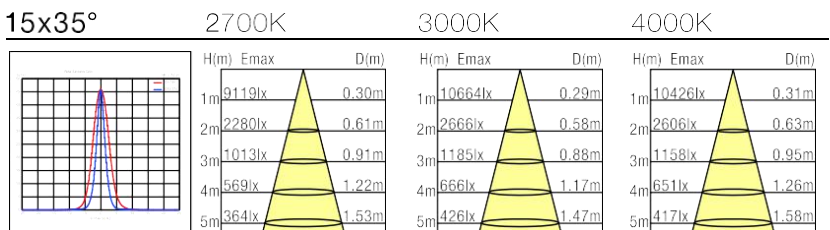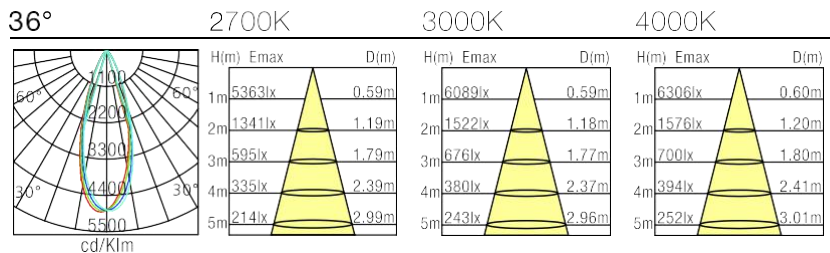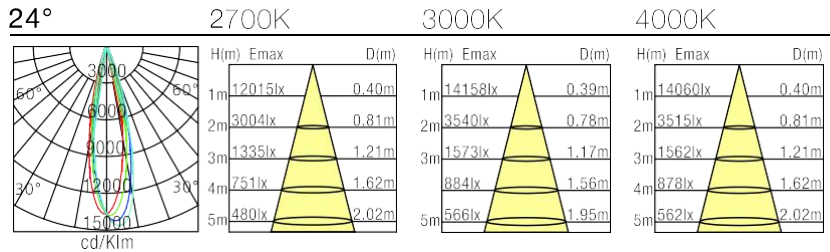


Installation instruction

Compatible LED Tracks:


4-wire

6-wire

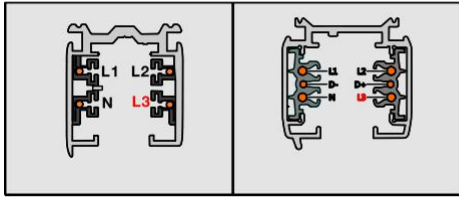


*Non-dimmable: 4-wire controlled by circuit L3 only |single circuit control|;

*0/1-10V or DALI dimmable: 6-wire controlled by circuit L3 only |single circuit control|;

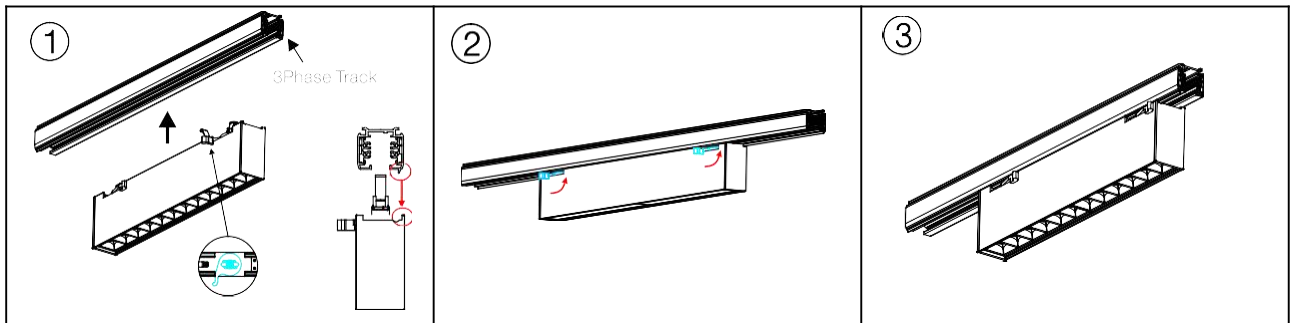


Packaging:

L328A




Inner Box
L690*W285*H110mm
10pc/box
GW: 8kg/box




Master Carton
L700*295*265mm
20pc/box
GW: 17.2kg/box

L646A




Inner Box
L690*W285*H110mm
5pc/box GW:
7kg/box




Master Carton
L700*295*265mm
10pc/box
GW: 15.2kg/box

L964A



Inner Box
L995*W223*H110mm
4pc/box GW:
8kg/box



Master Carton
L1000*240*265mm
8pc/box
GW: 17.2kg/box

