

iTrack Pro Series


TL18-40W

Reflector



Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	1000mA, 35-37V
Rated life:	>50,000 hours
Operating temperature:	-20℃~40℃
Storage temperature:	-30℃~60℃
Certificate:	TUV/CE/RoHS
Weight:	2.0KG




Ordering Information:

○White ●Black


Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
40W	>80	▲ 12°	4140 lm	3000K	○	TL184-40W-830-W-12
					●	TL184-40W-830-B-12
		▲ 20°	4420 lm	4000K	○	TL184-40W-840-W-12
					●	TL184-40W-840-B-12
		▲ 45°	4180 lm	3000K	○	TL184-40W-830-W-20
					●	TL184-40W-830-B-20
	>90	▲ 12°	4350 lm	4000K	○	TL184-40W-840-W-20
					●	TL184-40W-840-B-20
		▲ 20°	4030 lm	3000K	○	TL184-40W-830-W-45
					●	TL184-40W-830-B-45
		▲ 45°	4140 lm	4000K	○	TL184-40W-840-W-45
					●	TL184-40W-840-B-45
	>80	▲ 12°	3530 lm	3000K	○	TL184-40W-930-W-12
					●	TL184-40W-930-B-12
		▲ 20°	3700 lm	4000K	○	TL184-40W-940-W-12
					●	TL184-40W-940-B-12
		▲ 45°	3550 lm	3000K	○	TL184-40W-930-W-20
					●	TL184-40W-930-B-20
	>90	▲ 12°	3740 lm	4000K	○	TL184-40W-940-W-20
					●	TL184-40W-940-B-20
		▲ 20°	3400 lm	3000K	○	TL184-40W-930-W-45
					●	TL184-40W-930-B-45
		▲ 45°	3650 lm	4000K	○	TL184-40W-940-W-45
					●	TL184-40W-940-B-45

Technical Data test pattern


CRI80 12°

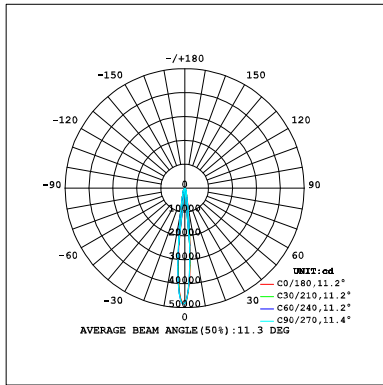


3000K

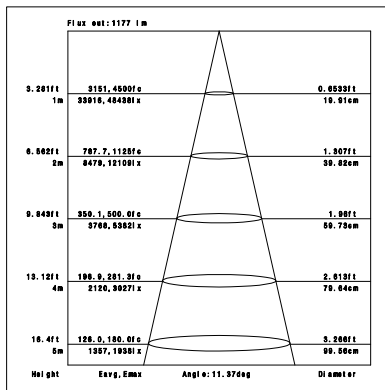


4000K

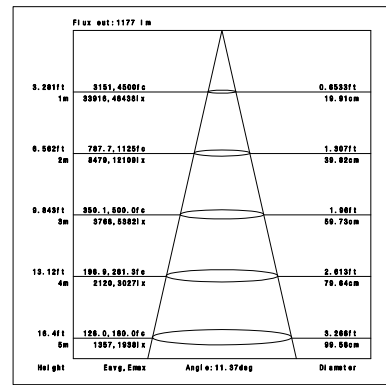


CRI80 20°

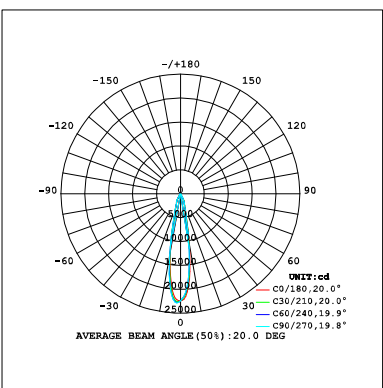


3000K

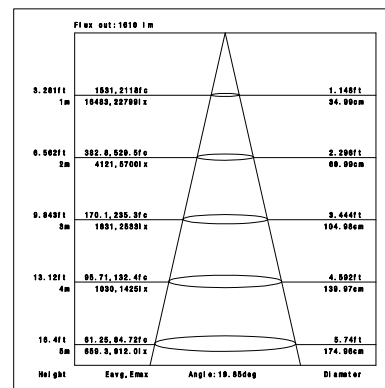


4000K

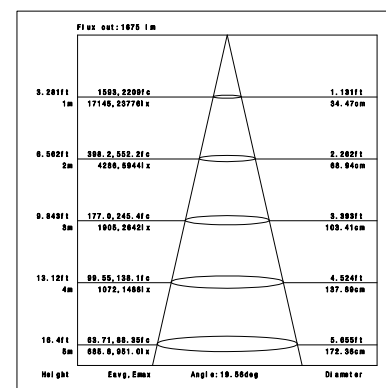


CRI80 45°

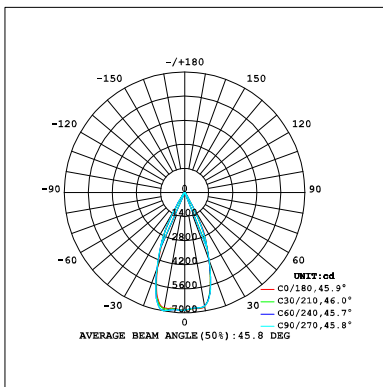


3000K

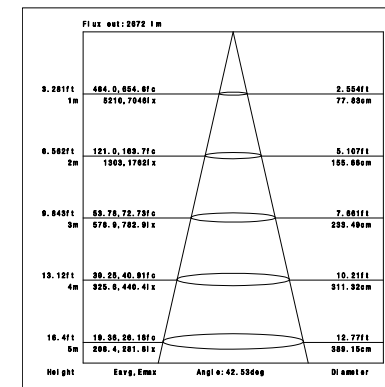


4000K

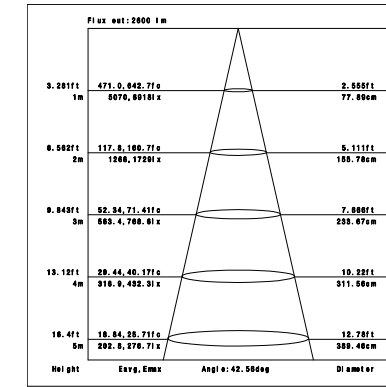


CRI90 12°

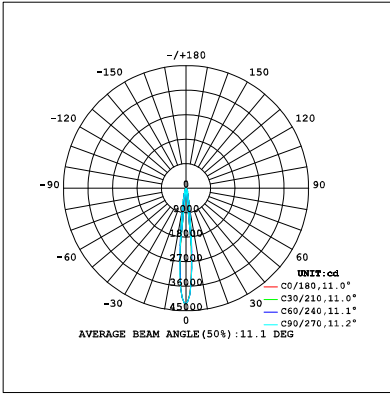


3000K

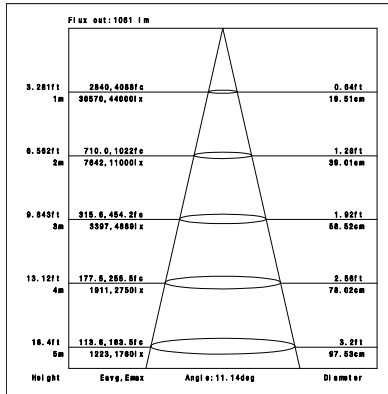


4000K

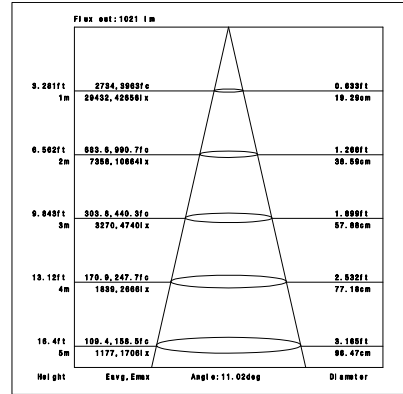


CRI90 20°

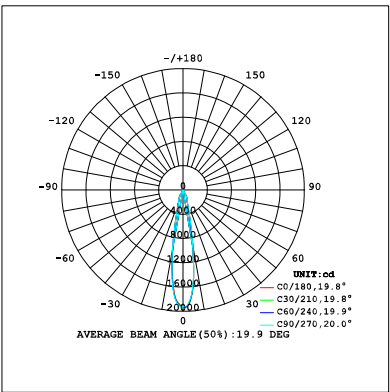


3000K

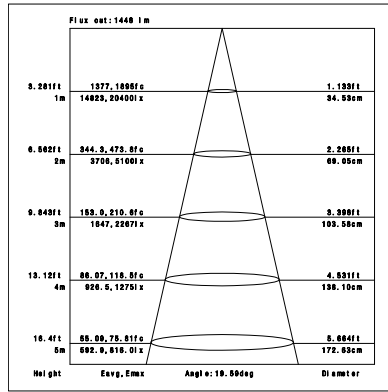


4000K

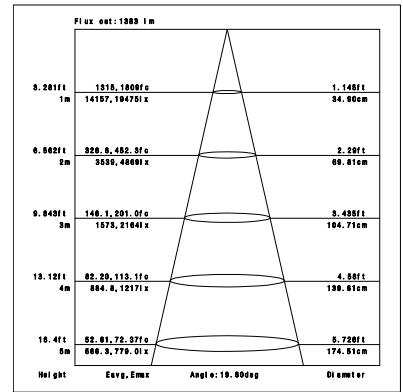


CRI90 45°

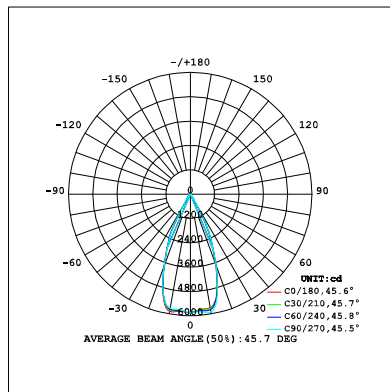


3000K

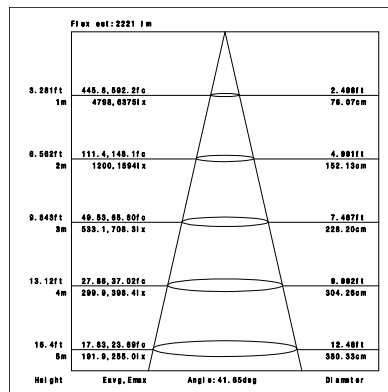


4000K

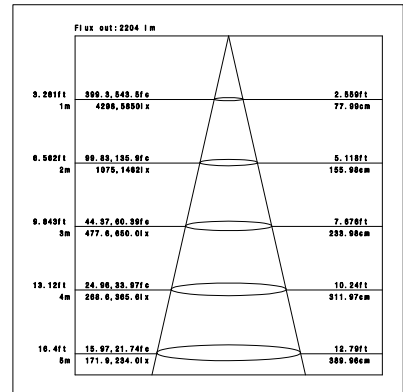

Packaging:






Box
 L320*W140*H320 mm
 1pc/box
 GW: 2.0kg/box






Outer carton
 L670Xw500xH350mm
 6 pcs/CTN
 GW: 14kg/carton

Installation instruction


Adaptor installation diagram

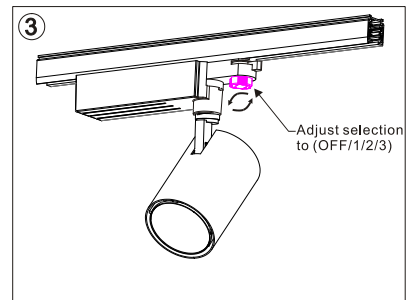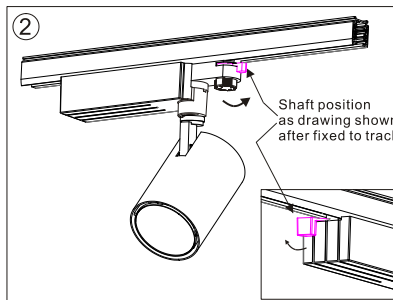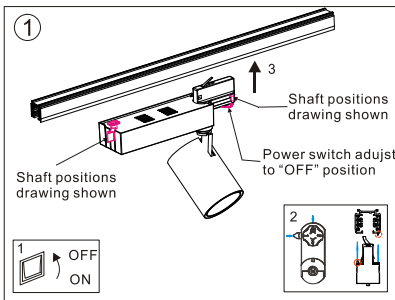

Adaptor disassembly diagram

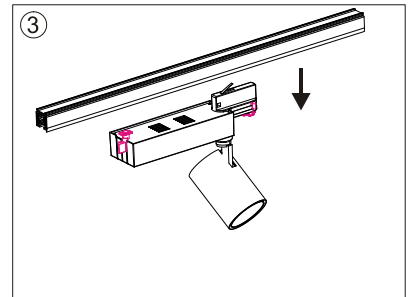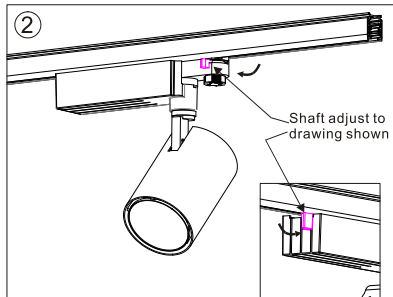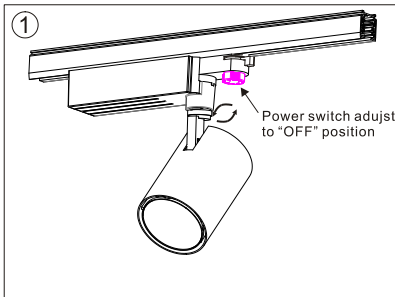

Cautions

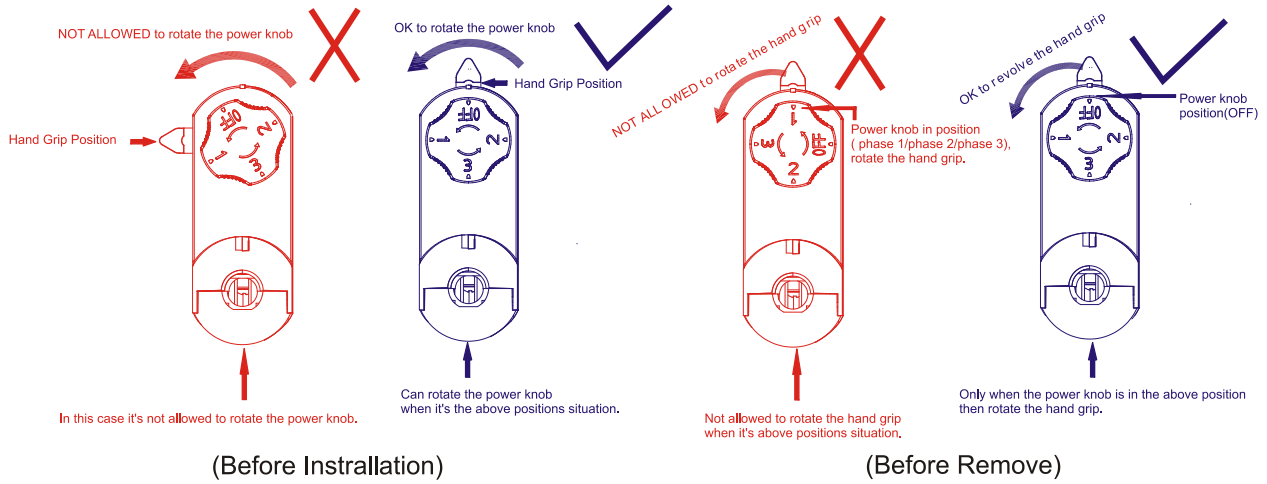

Product naming system

