


iTrack Vera Series

TL22-30W

Reflector

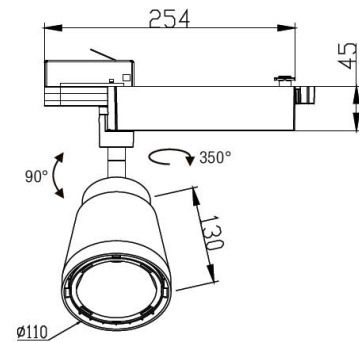

Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	700mA, 35-37V
Rated life:	>50,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE/RoHS
Weight:	1.15KG


Ordering Information:

○White ●Black


Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
30W	>80	▲ 15°	2980 lm	3000K	○	TL224-30W-830-W-15
					●	TL224-30W-830-B-15
		3160 lm	4000K	○	TL224-30W-840-W-15	
				●	TL224-30W-840-B-15	
		▲ 20°	3010 lm	3000K	○	TL224-30W-830-W-20
					●	TL224-30W-830-B-20
	3250 lm	4000K	○	TL224-30W-840-W-20		
			●	TL224-30W-840-B-20		
	▲ 45°	2990 lm	3000K	○	TL224-30W-830-W-45	
				●	TL224-30W-830-B-45	
	3190 lm	4000K	○	TL224-30W-840-W-45		
			●	TL224-30W-840-B-45		
>90	▲ 15°	2670 lm	3000K	○	TL224-30W-930-W-15	
				●	TL224-30W-930-B-15	
	2810 lm	4000K	○	TL224-30W-940-W-15		
			●	TL224-30W-940-B-15		
	▲ 20°	2700 lm	3000K	○	TL224-30W-930-W-20	
				●	TL224-30W-930-B-20	
2830 lm	4000K	○	TL224-30W-940-W-20			
		●	TL224-30W-940-B-20			
▲ 45°	2680 lm	3000K	3000K	○	TL224-30W-930-W-45	
				●	TL224-30W-930-B-45	
2810 lm	4000K	○	TL224-30W-940-W-45			
		●	TL224-30W-940-B-45			

Technical Data test pattern


CRI80 15°

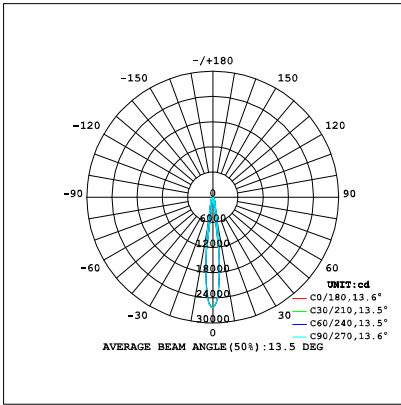


3000K

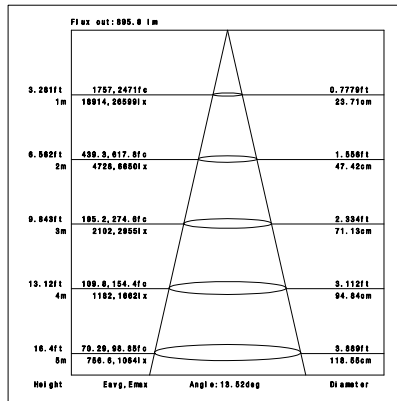


4000K

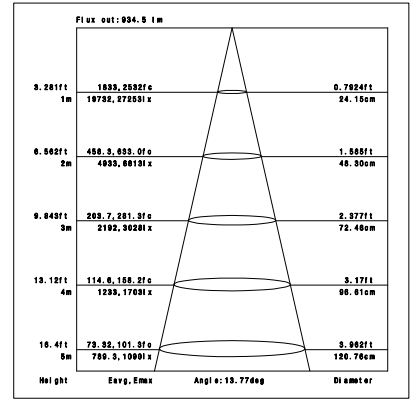


CRI80 20°

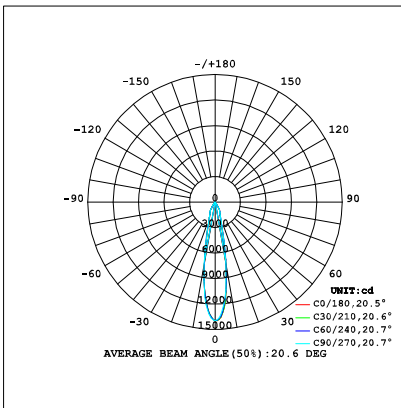


3000K

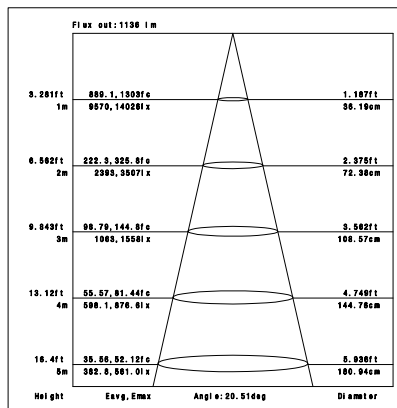


4000K

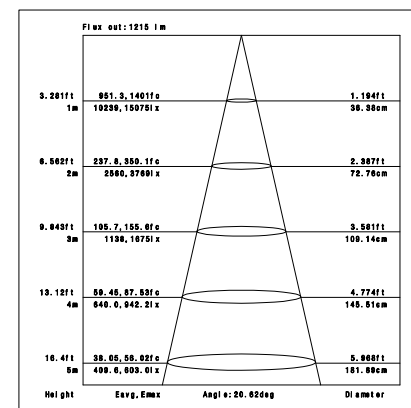


CRI80 45°

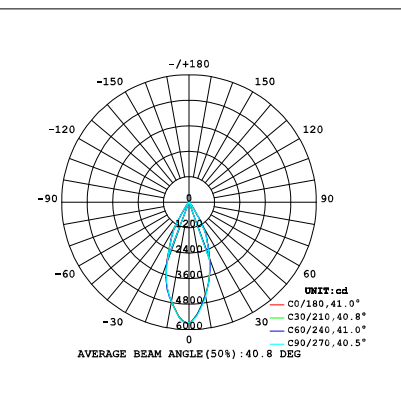

3000K

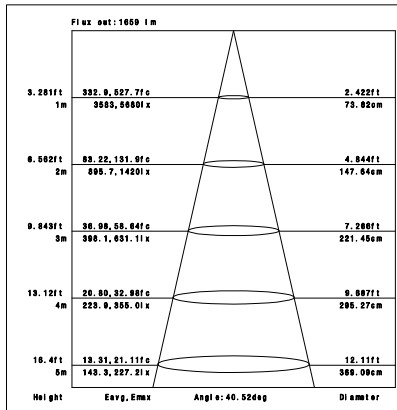




4000K

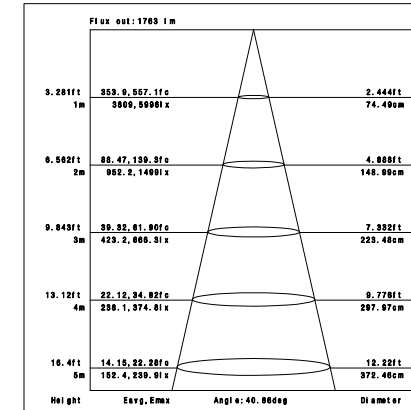

CRI90 15°

3000K




4000K

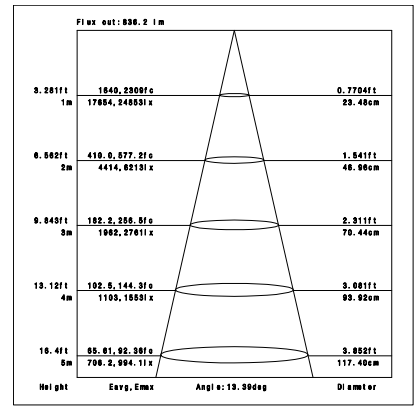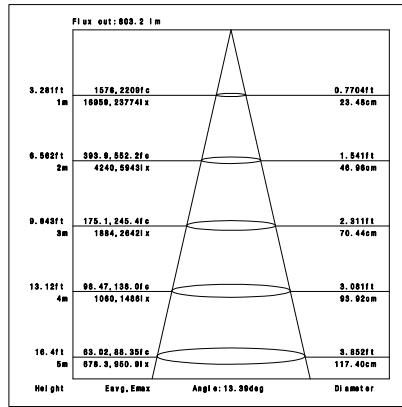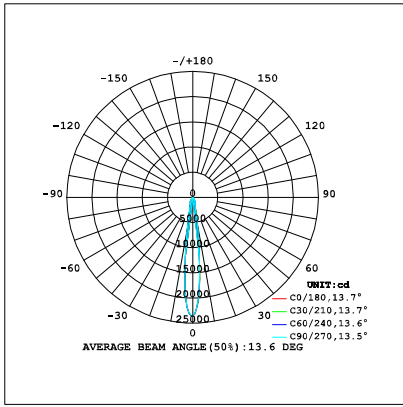

CRI90 20°

3000K




4000K

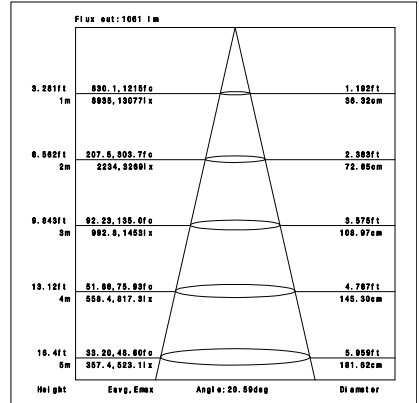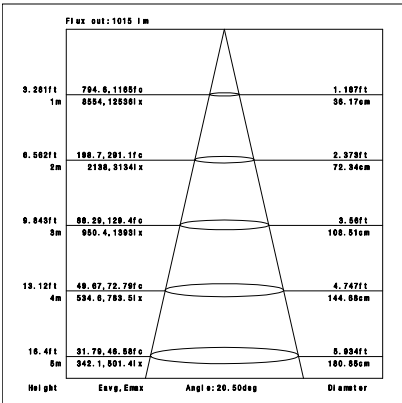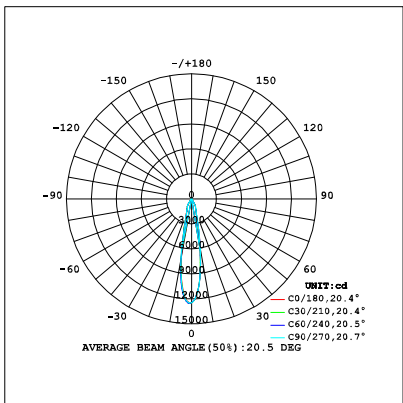


CRI90 45°

3000K


4000K

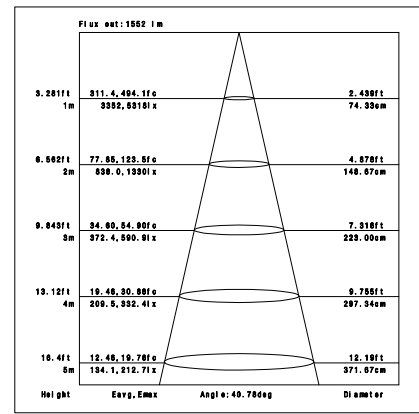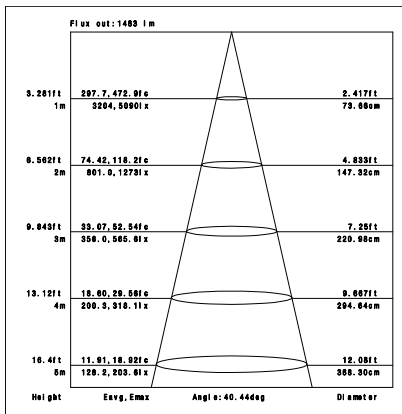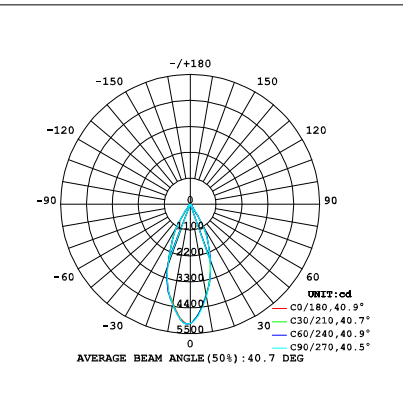

Packaging:







Box
L288*W256H120mm
1pc/box
GW: 1.35kg/box



Outer carton
L600XW540xH265mm
8pcs/CTN
GW: 12kg/carton

Installation instruction

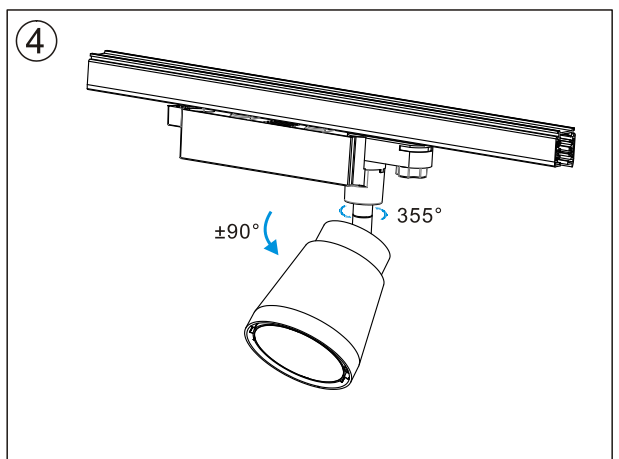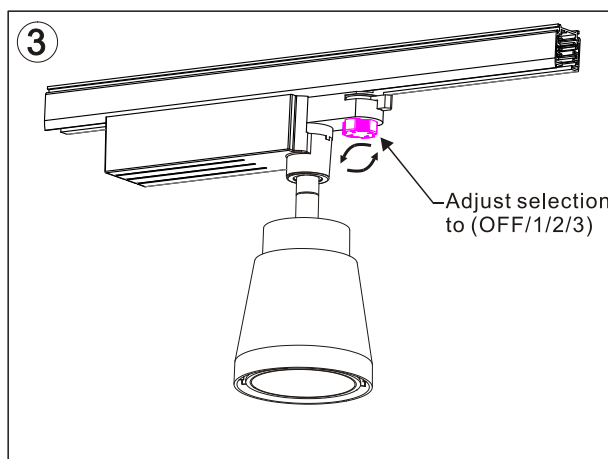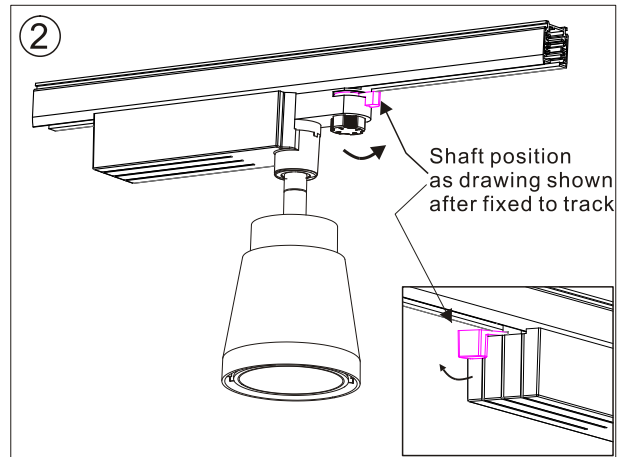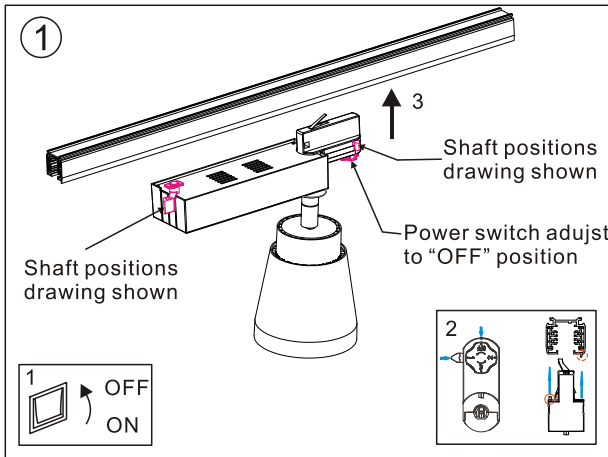

Product naming system

TL (X) XX X (H) - XW - X XX - X- XX

