


iTrack Vario Series

**TL24-20W**

Reflector

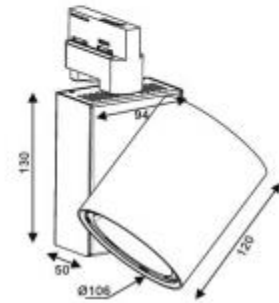

Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	500mA, 35-37V
Rated life:	>50,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE/RoHS
Weight:	1.25KG

Ordering Information:

○ White ● Black



Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
20W	>80	▲ 10°	2040 lm	3000K	○	TL244-20W-830-W-10
					●	TL244-20W-830-B-10
		2050 lm	4000K	○	TL244-20W-840-W-10	
				●	TL244-20W-840-B-10	
		▲ 20°	2060 lm	3000K	○	TL244-20W-830-W-20
					●	TL244-20W-830-B-20
	2060 lm	4000K	○	TL244-20W-840-W-20		
			●	TL244-20W-840-B-20		
	▲ 38°	2050 lm	3000K	○	TL244-20W-830-W-38	
				●	TL244-20W-830-B-38	
	2040 lm	4000K	○	TL244-20W-840-W-38		
			●	TL244-20W-840-B-38		
>90	▲ 10°		1730 lm	3000K	○	TL244-20W-930-W-10
					●	TL244-20W-930-B-10
		1870 lm	4000K	○	TL244-20W-940-W-10	
				●	TL244-20W-940-B-10	
		▲ 20°	1750 lm	3000K	○	TL244-20W-930-W-20
					●	TL244-20W-930-B-20
	1900 lm	4000K	○	TL244-20W-940-W-20		
			●	TL244-20W-940-B-20		
	▲ 38°	1750 lm	3000K	○	TL244-20W-930-W-38	
				●	TL244-20W-930-B-38	
	1890 lm	4000K	○	TL244-20W-940-W-38		
			●	TL244-20W-940-B-38		

Technical Data test pattern


CRI80 10°

3000K


4000K

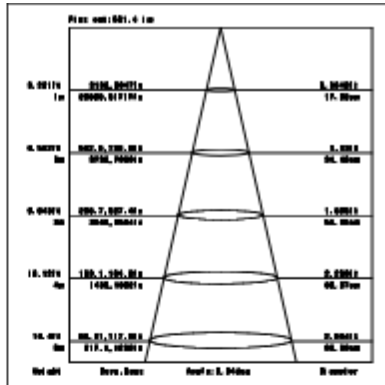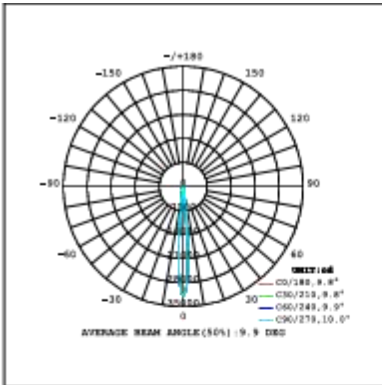


CRI90 10°

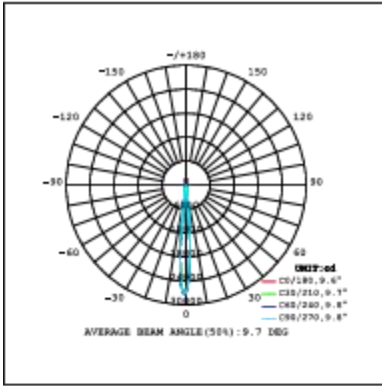


3000K

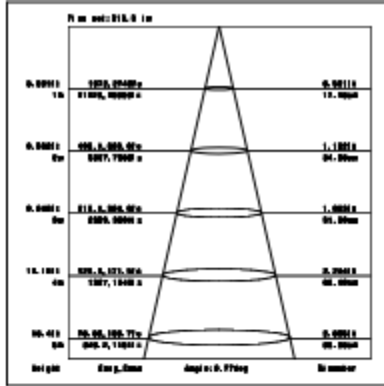


4000K

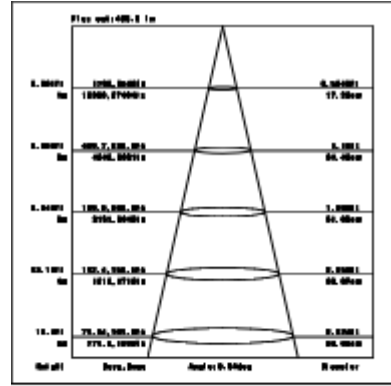


CRI90 20°

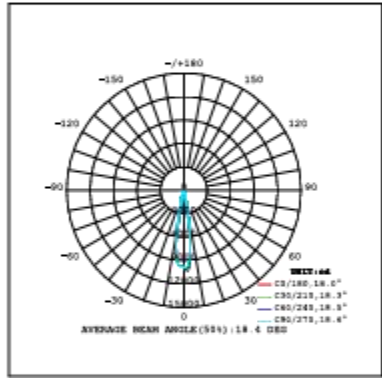


3000K

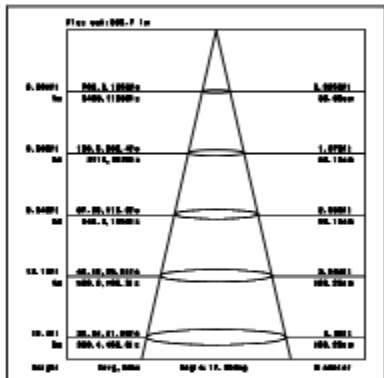


4000K

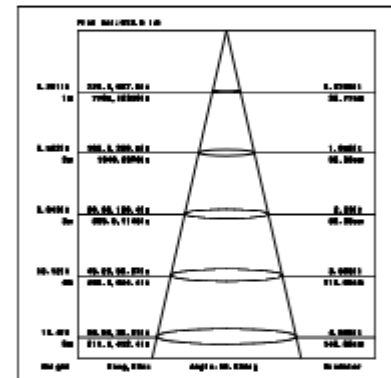


CRI90 38°

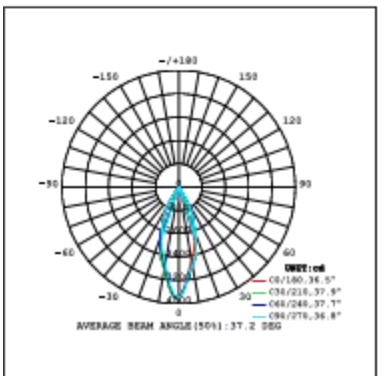

3000K




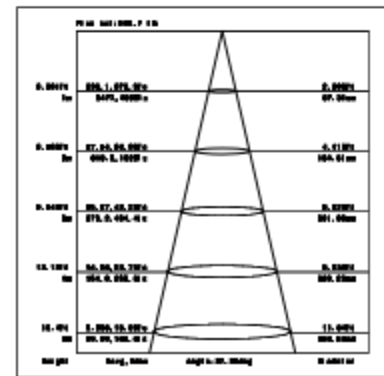


4000K



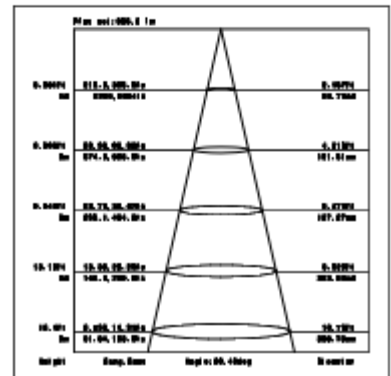


Installation instruction





Adaptor installation diagram

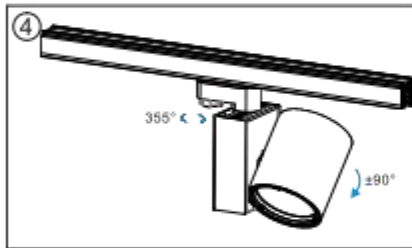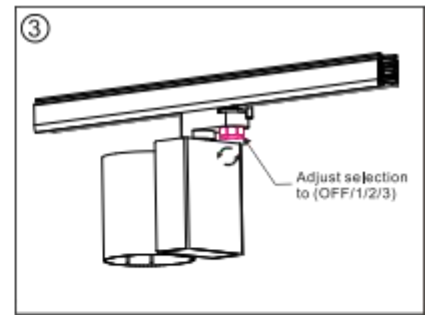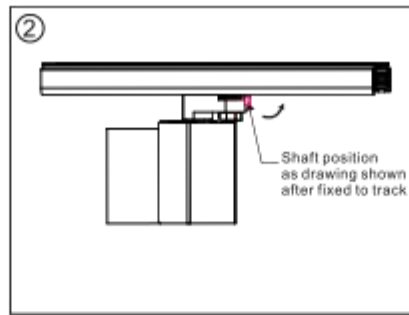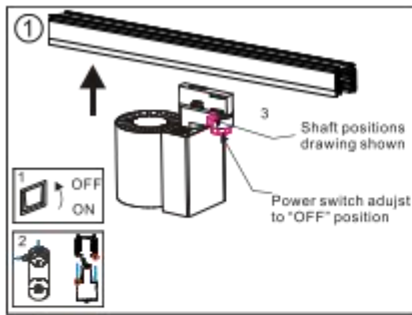

Adaptor disassembly diagram

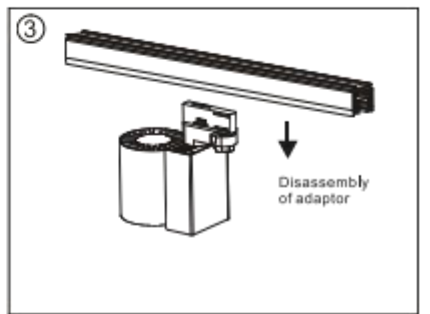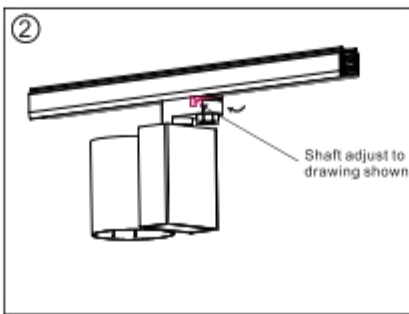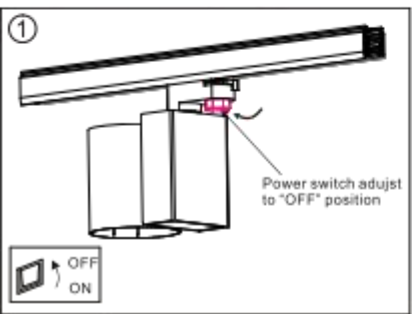



Cautions

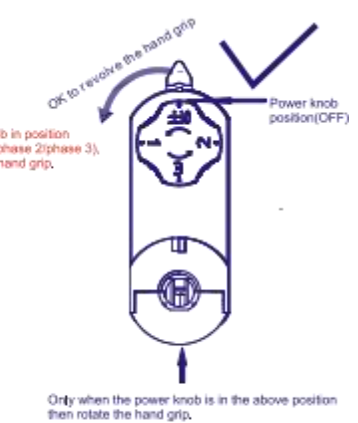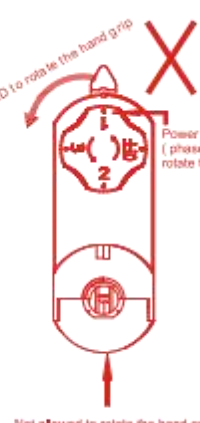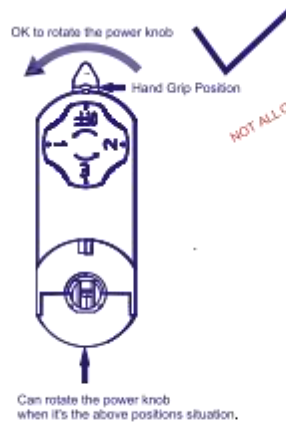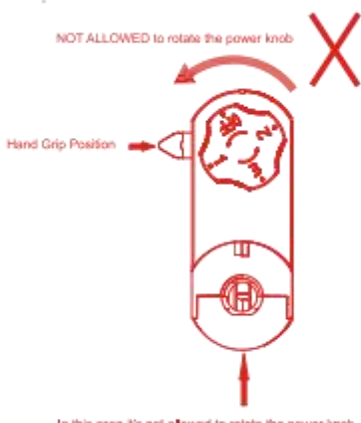

(Before Installation)

(Before Remove)

Packaging:

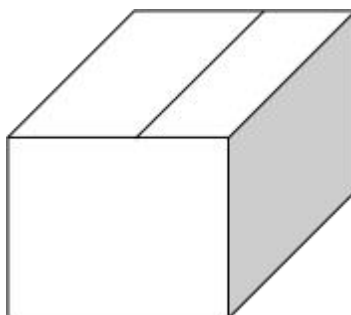

**Box**

L165\*W130\*H200mm  
 1pc/box  
 GW: 1.55kg/box

**Outer carton**

L545Xw355xH430mm  
 16pcs/CTN  
 GW: 26kg/carton

Product naming system

