



iTrack Pro Series

**TL28-30W**

Reflector



Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	700mA,35-37V
Rated life:	>35,000 hours
Operating temperature:	-20℃~40℃
Storage temperature:	-30℃~60℃
Certificate:	CE/RoHS
Weight:	1.25KG


Ordering Information:

○White ●Black


Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
30W	>80	▲ 15°	2980 lm	3000K	○	TL284-30W-830-W-15
			3160 lm	4000K	●	TL284-30W-830-B-15
		▲ 20°	3010 lm	3000K	○	TL284-30W-840-W-15
			3250 lm	4000K	●	TL284-30W-840-B-15
		▲ 45°	2990 lm	3000K	○	TL284-30W-830-W-20
			3190 lm	4000K	●	TL284-30W-830-B-20
	>90	▲ 15°	2670 lm	3000K	○	TL284-30W-840-W-20
			2810 lm	4000K	●	TL284-30W-840-B-20
		▲ 20°	2700 lm	3000K	○	TL284-30W-830-W-45
			2830 lm	4000K	●	TL284-30W-830-B-45
		▲ 45°	2680 lm	3000K	○	TL284-30W-840-W-45
			2810 lm	4000K	●	TL284-30W-840-B-45

Technical Data test pattern


CRI80 15°

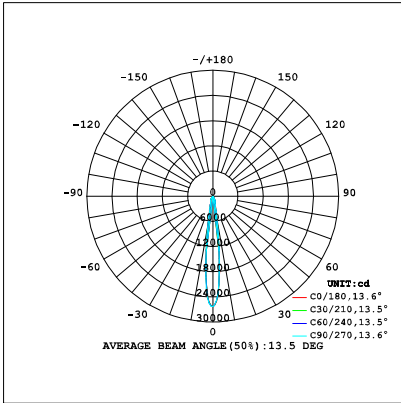


3000K

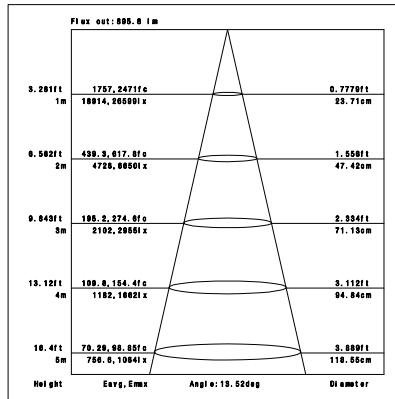


4000K

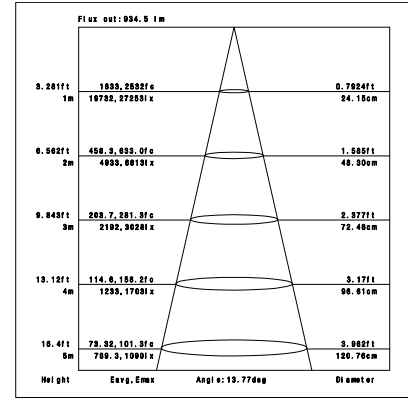


CRI80 20°

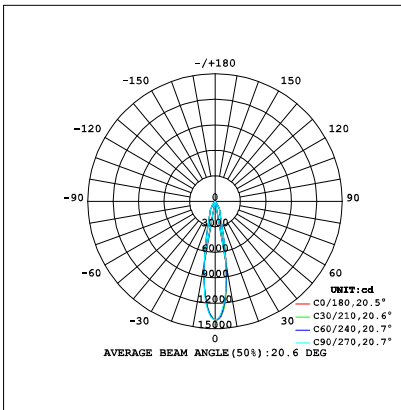


3000K

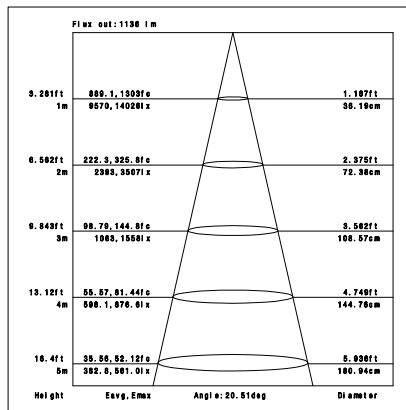


4000K

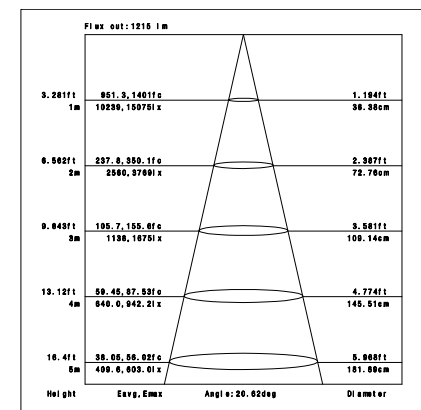


CRI80 45°

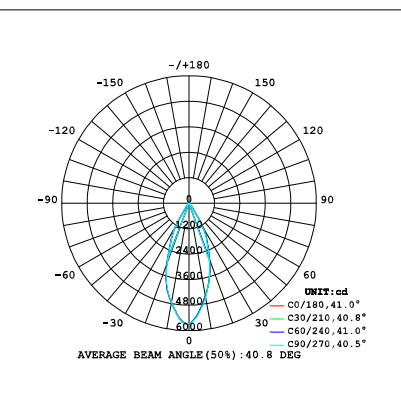

3000K

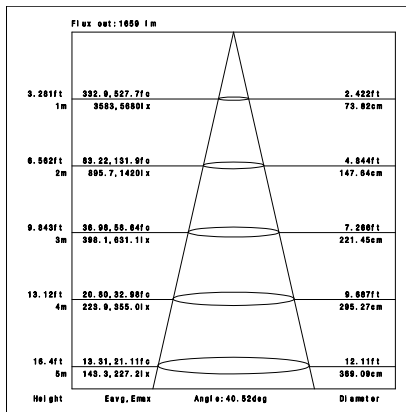




4000K

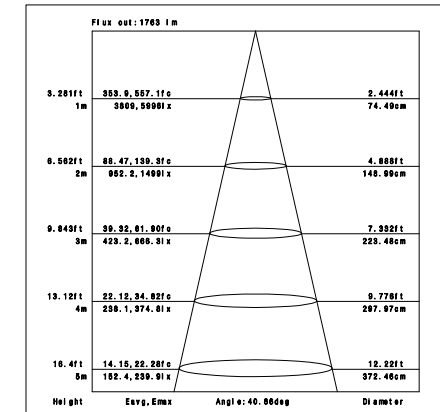

CRI90 15°

3000K




4000K

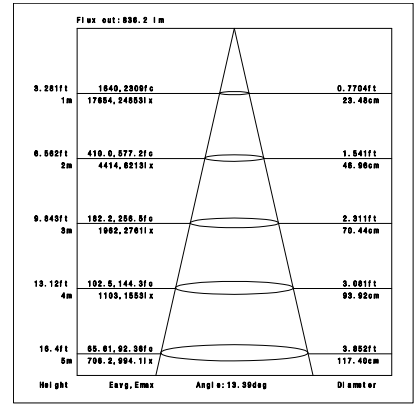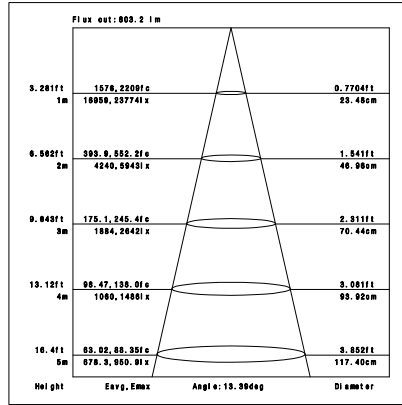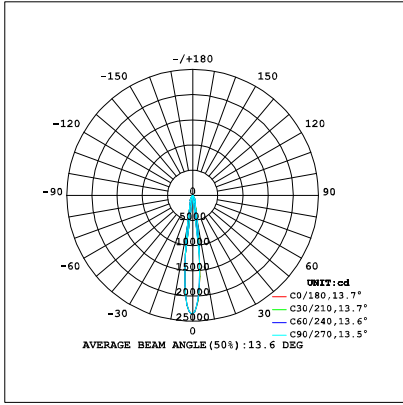

CRI90 20°

3000K




4000K

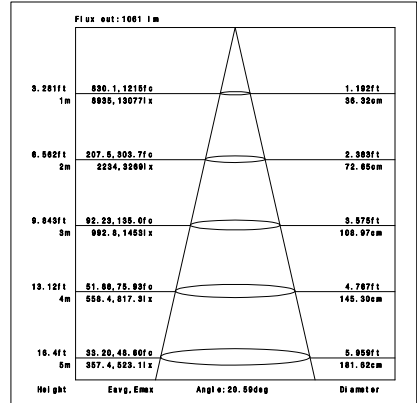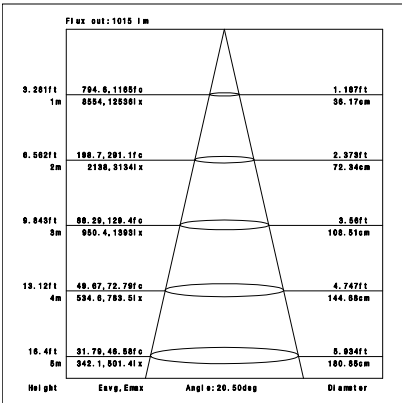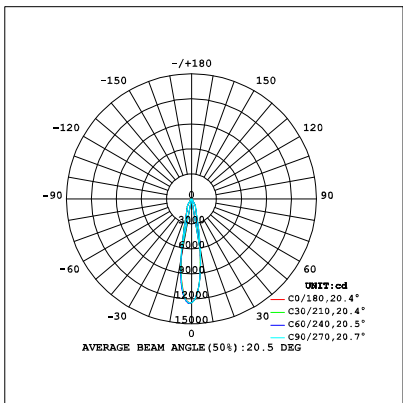


CRI90 45°

3000K


4000K

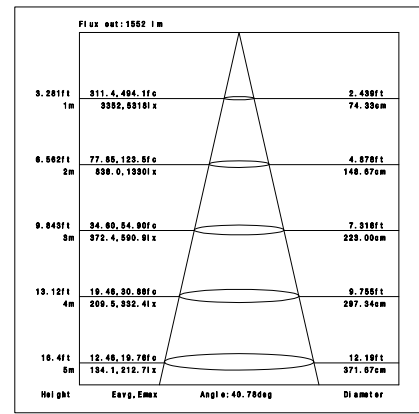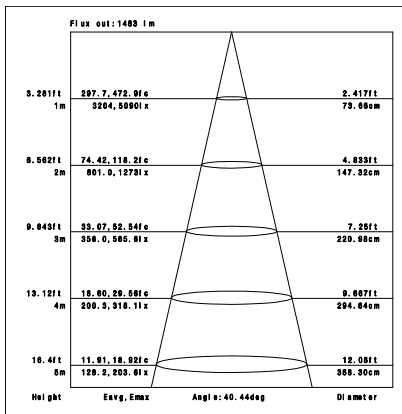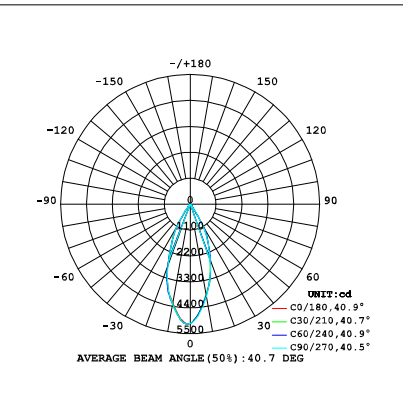

Packaging:






**Box**  
L280\*W110\*H280 mm  
1pc/box  
GW: 1.55kg/box

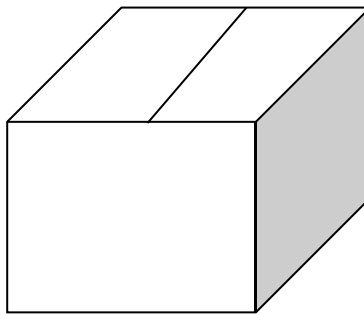




**Outer carton**  
L590Xw570xH320mm  
10 pcs/CTN  
GW: 17kg/carton

Installation instruction


Adaptor installation diagram

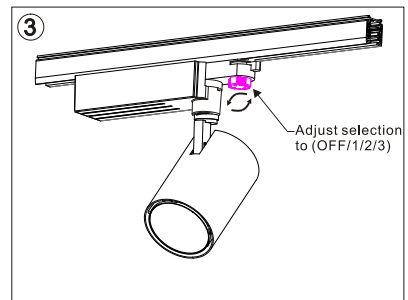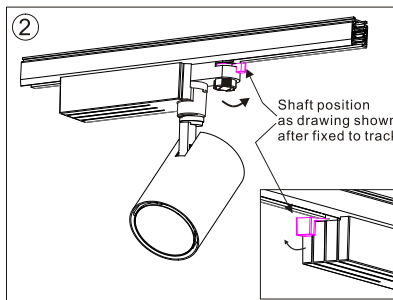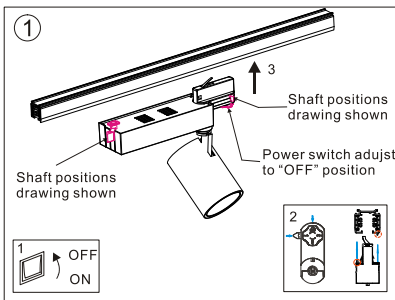

Adaptor disassembly diagram

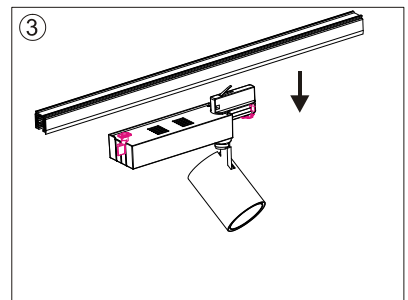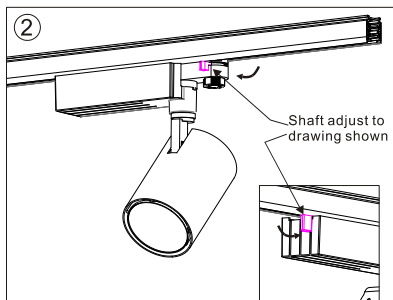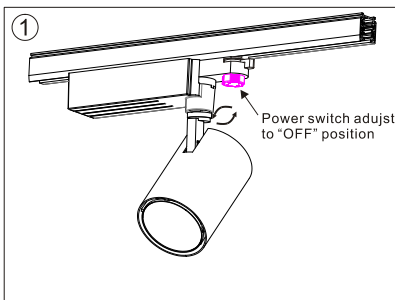

Cautions

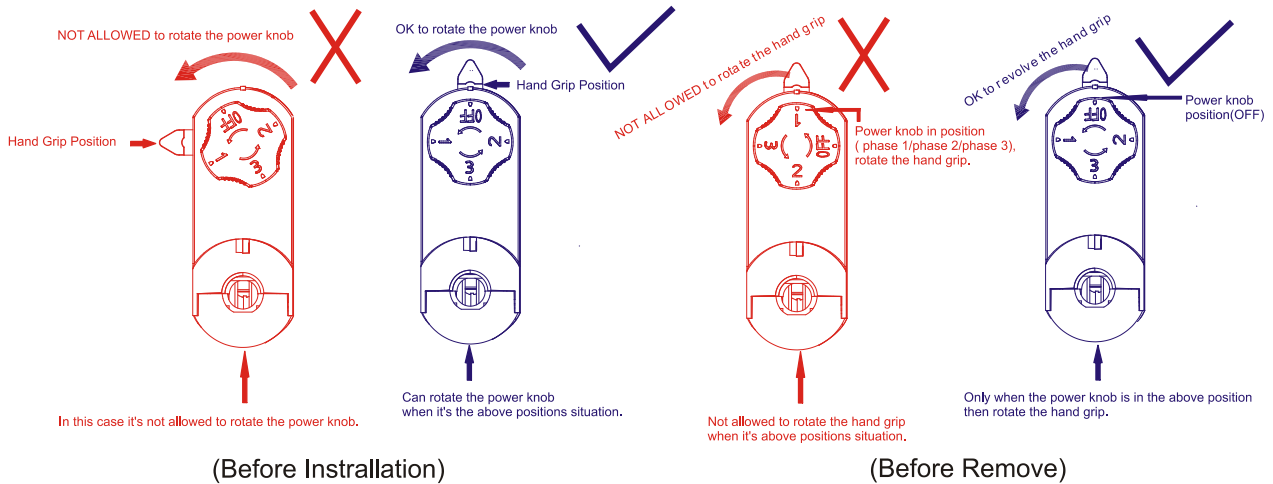

(Before Installation)

(Before Remove)

Product naming system

**TL ( X ) XX X (H) – XW – X XX – X- XX**

