

iTrack Pro Series

TL29-15W

optical lens



Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	350mA, 35-37V
Rated life:	>50,000 hours
Operating temperature:	-24°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE/RoHS
Weight:	0.64KG

Ordering Information:

○ White ● Black




Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
15W	>80	▲ 16°	1370 lm	3000K	○	TL294-15W-830-W-16
					●	TL294-15W-830-B-16
		1390 lm	4000K	○	TL294-15W-840-W-16	
				●	TL294-15W-840-B-16	
		▲ 24°	1560 lm	3000K	○	TL294-15W-830-W-24
					●	TL294-15W-830-B-24
	1620 lm	4000K	○	TL294-15W-840-W-24		
			●	TL294-15W-840-B-24		
	▲ 36°	1630 lm	3000K	○	TL294-15W-830-W-36	
				●	TL294-15W-830-B-36	
	1680 lm	4000K	○	TL294-15W-840-W-36		
			●	TL294-15W-840-B-36		
>90	▲ 16°		1150 lm	3000K	○	TL294-15W-930-W-16
					●	TL294-15W-930-B-16
		1280 lm	4000K	○	TL294-15W-940-W-16	
				●	TL294-15W-940-B-16	
		▲ 24°	1300 lm	3000K	○	TL294-15W-930-W-24
					●	TL294-15W-930-B-24
	1450 lm	4000K	○	TL294-15W-940-W-24		
			●	TL294-15W-940-B-24		
	▲ 36°	1370 lm	3000K	○	TL294-15W-930-W-36	
				●	TL294-15W-930-B-36	
	1530 lm	4000K	○	TL294-15W-940-W-36		
			●	TL294-15W-940-B-36		

Technical Data test pattern

CRI80 16°

3000K




4000K

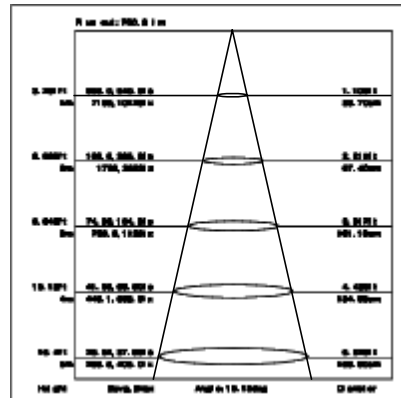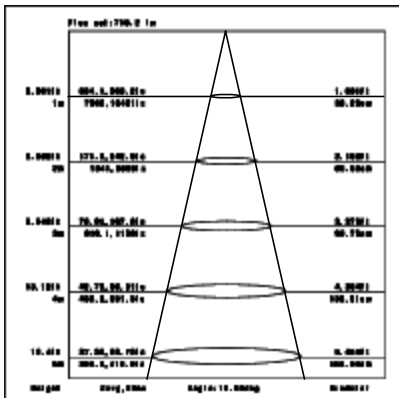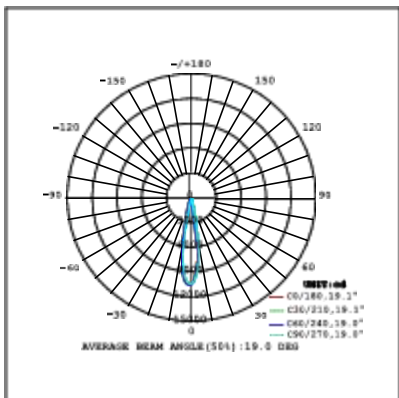

CRI80 24°

3000K




4000K

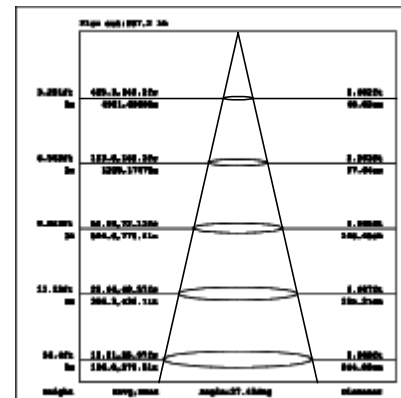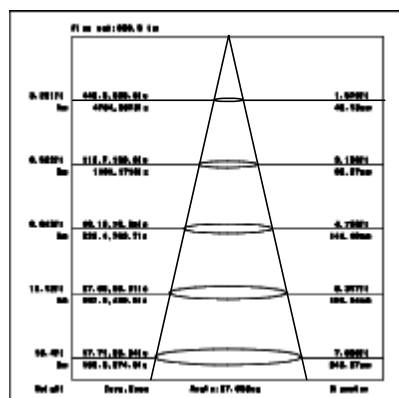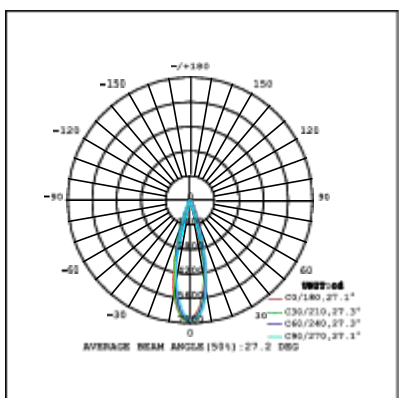

CRI80 36°

3000K




4000K

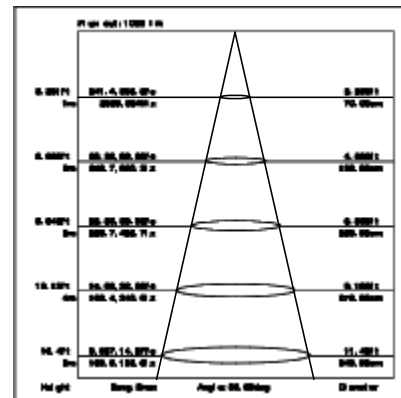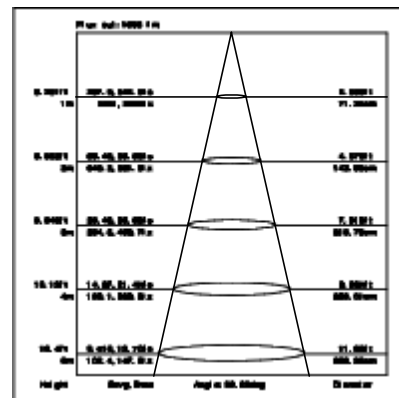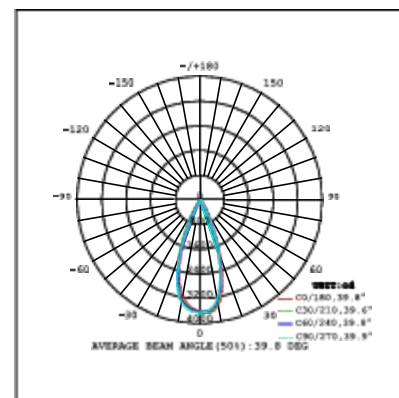

CRI90 16°

3000K




4000K

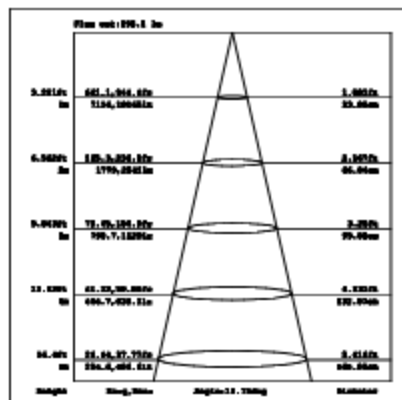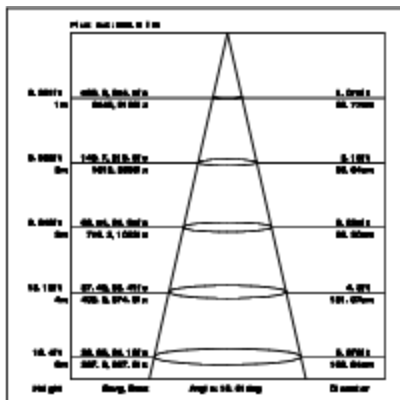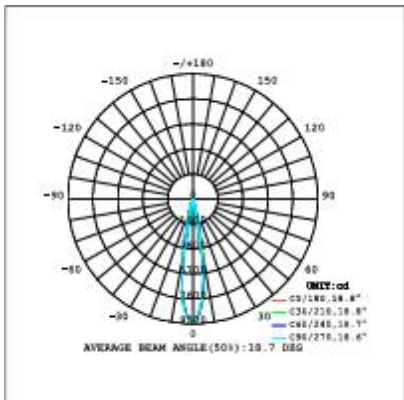

CRI90 24°

3000K




4000K

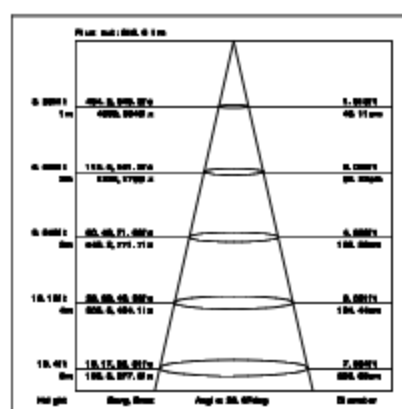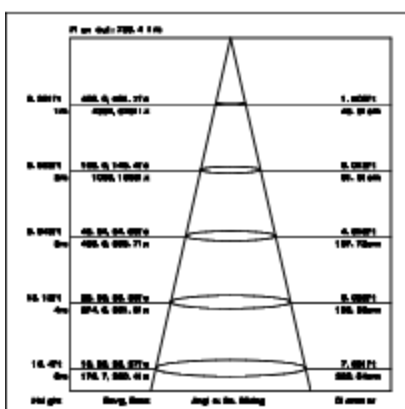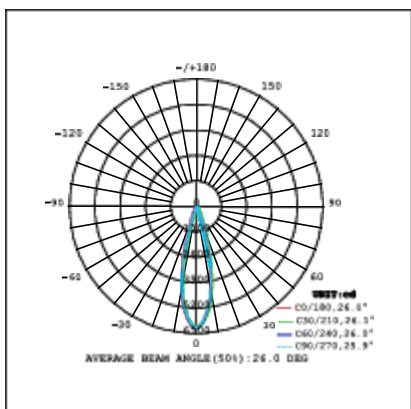


CRI90 36°

3000K


4000K

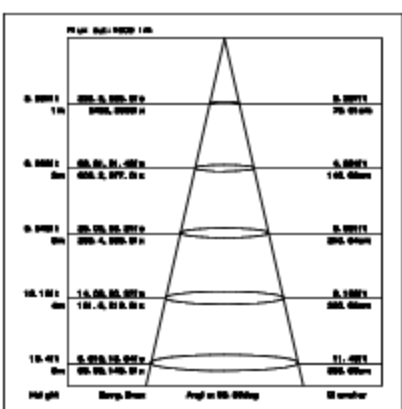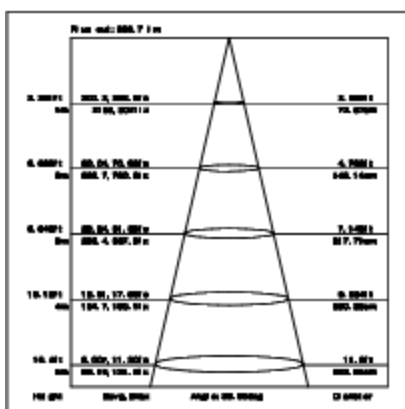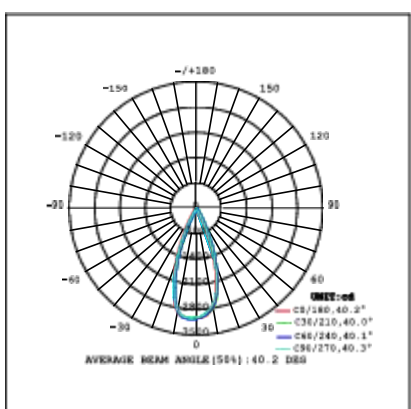


Installation instruction

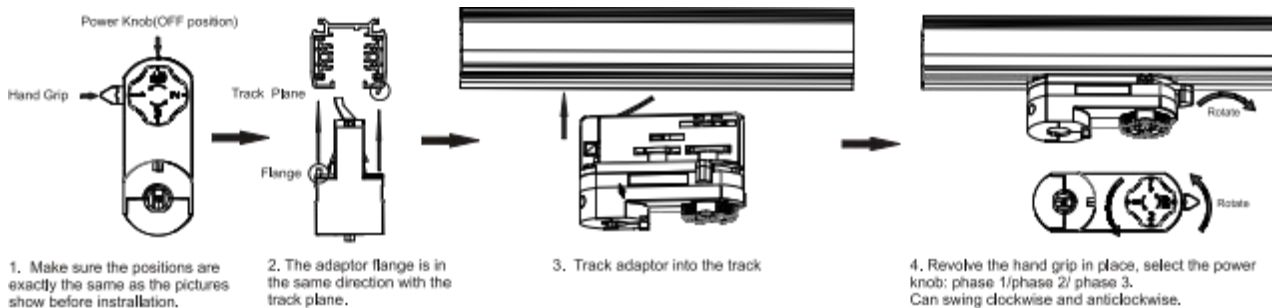


Remove Instructions

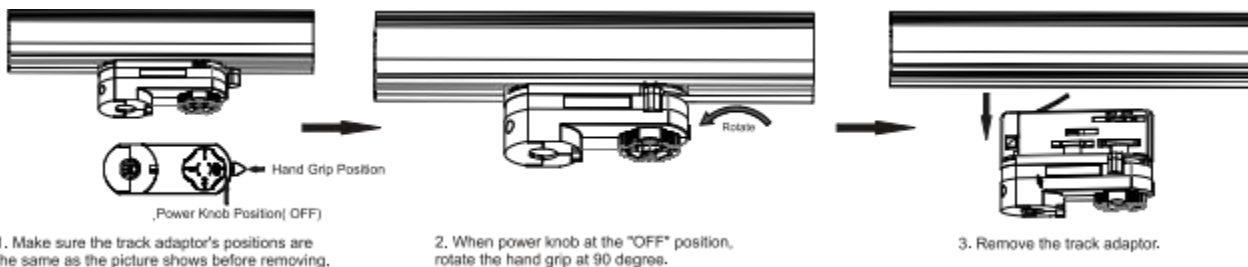


Cautions

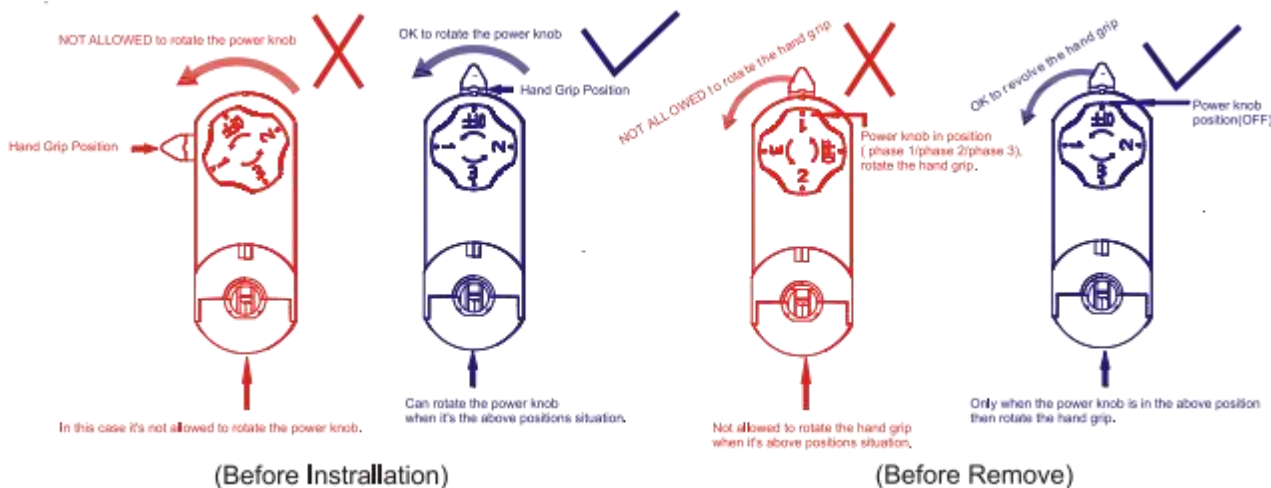

Packaging:



Box
L80*W80H290mm
1pc/box
GW: 0.84kg/box

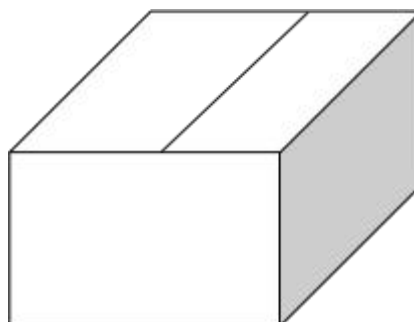

Outer carton
L415xW415xH305mm
25pcs/CTN
GW: 22kg/carton

Product naming system

