


iTrack Vario Series

TL30-30W

Reflector

Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	700mA, 35-37V
Rated life:	>50,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	
Weight:	1.15KG

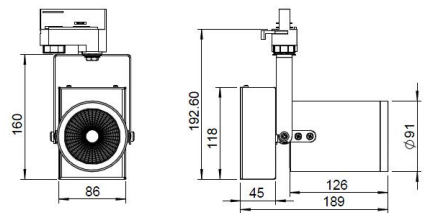


Ordering Information:

○ White ● Black


Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
30W	>80	▲ 15°	2719 lm	3000K	○	TL304-30W-830-W-15
					●	TL304-30W-830-B-15
		2871 lm	4000K	○	TL304-30W-840-W-15	
				●	TL304-30W-840-B-15	
		▲ 24°	2694 lm	3000K	○	TL304-30W-840-W-24
					●	TL304-30W-840-B-24
	2924 lm	4000K	○	TL304-30W-840-W-24		
			●	TL304-30W-840-B-24		
	▲ 36°	2694 lm	3000K	○	TL304-30W-840-W-36	
				●	TL304-30W-840-B-36	
	2856 lm	4000K	○	TL304-30W-840-W-36		
			●	TL304-30W-840-B-36		
>90	▲ 15°	2205 lm	3000K	○	TL304-30W-930-W-15	
				●	TL304-30W-930-B-15	
	▲ 24°	2205 lm	3000K	○	TL304-30W-930-W-24	
				●	TL304-30W-930-B-24	
	▲ 36°	2205 lm	3000K	○	TL304-30W-930-W-36	
				●	TL304-30W-930-B-36	

Technical Data test pattern


CRI80 15°

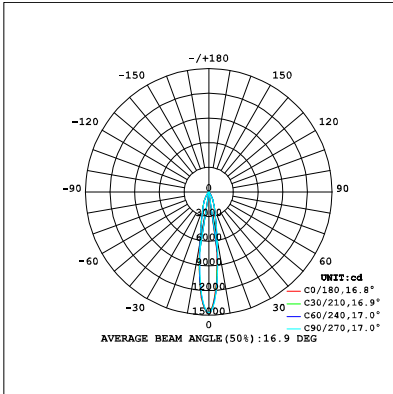


3000K

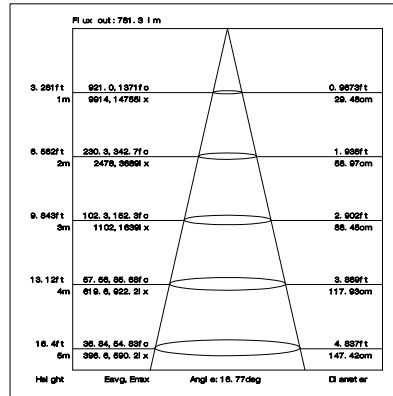


4000K

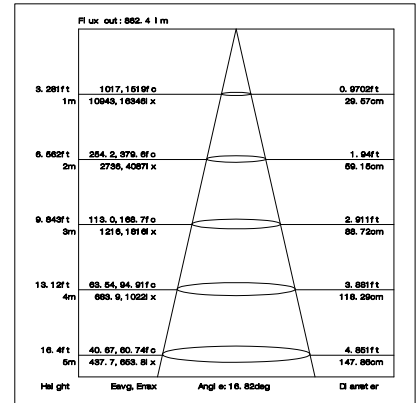


CRI80 24°

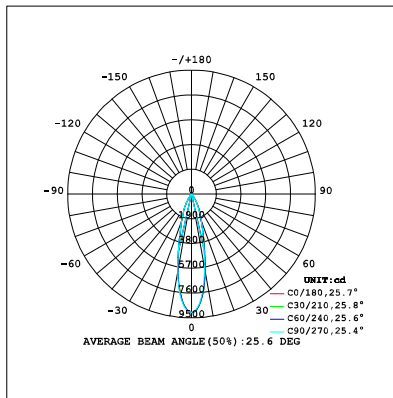


3000K

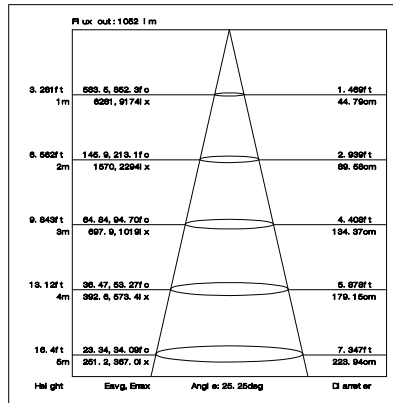


4000K

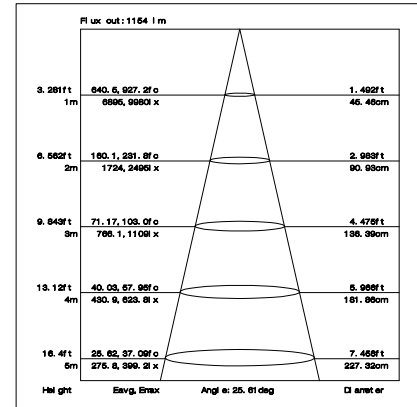


CRI80 36°

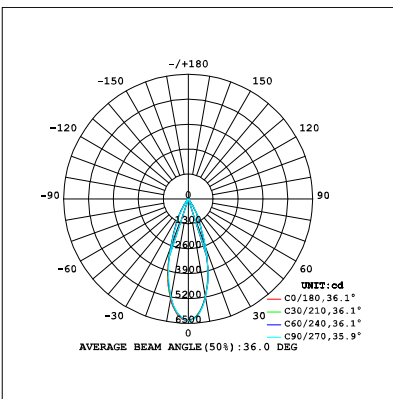


3000K

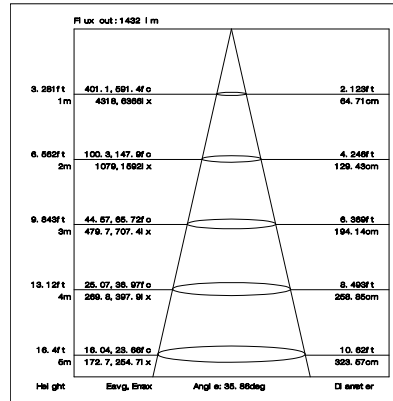


4000K

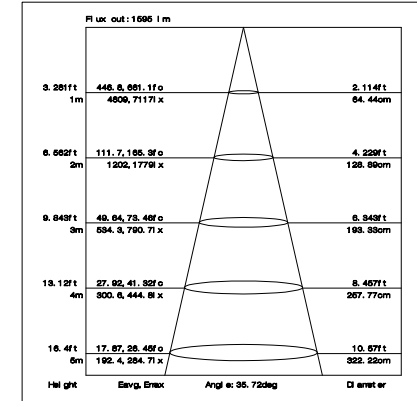


CRI90 15°

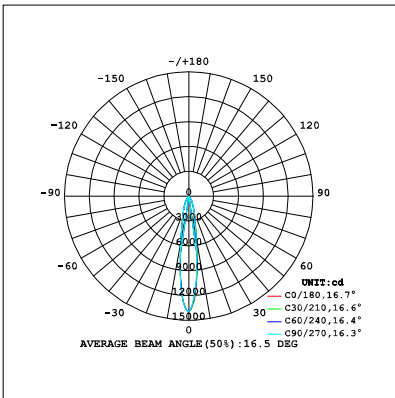


3000K

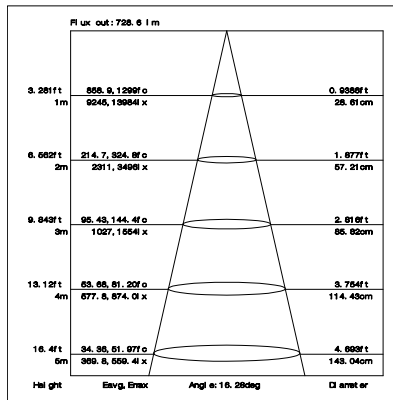


CRI90 24°

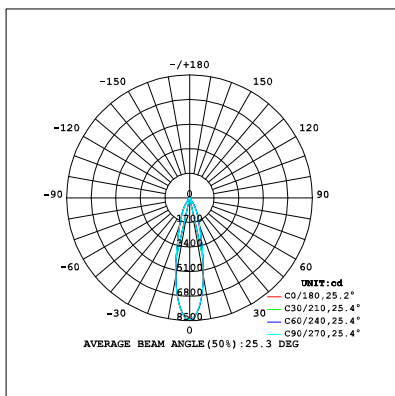


3000K

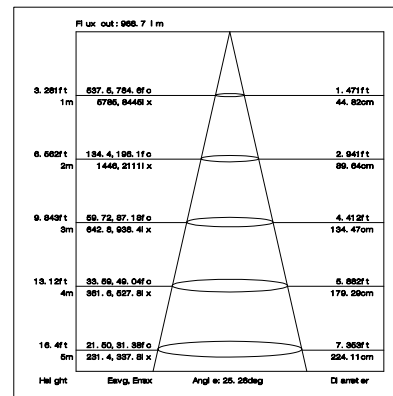





CRI90 36°

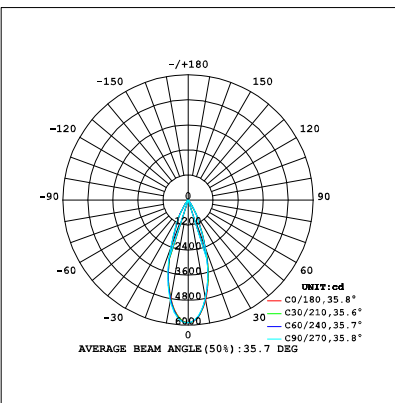


3000K

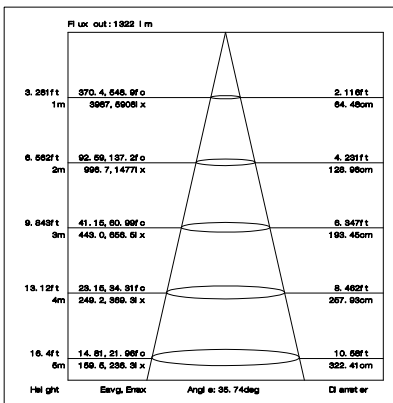


Installation instruction

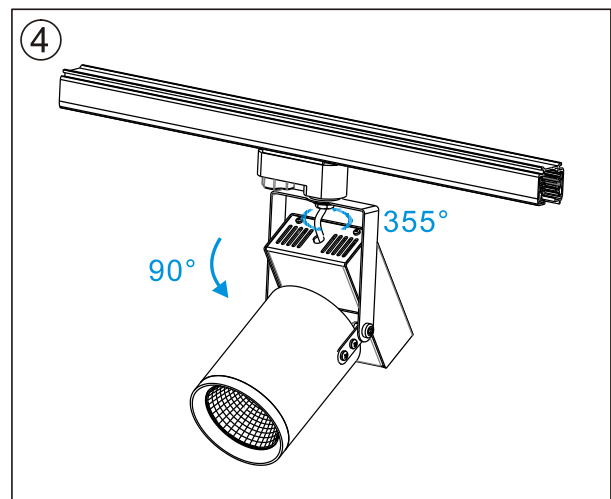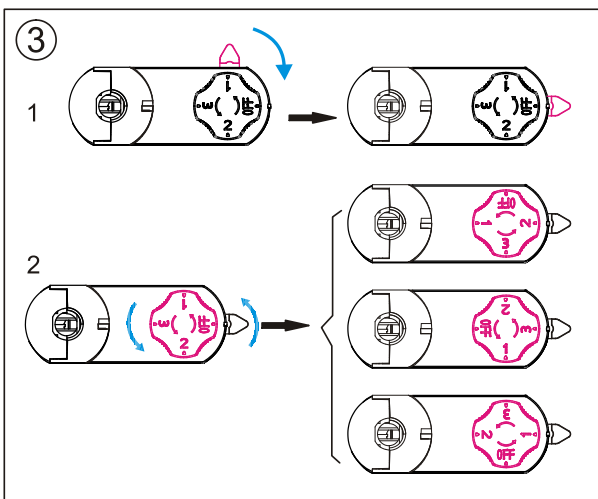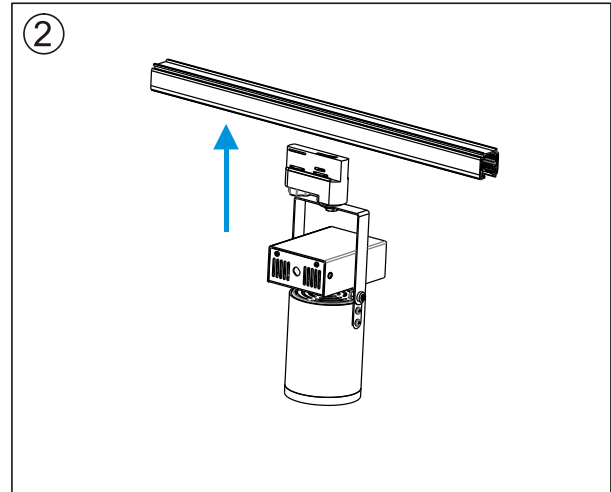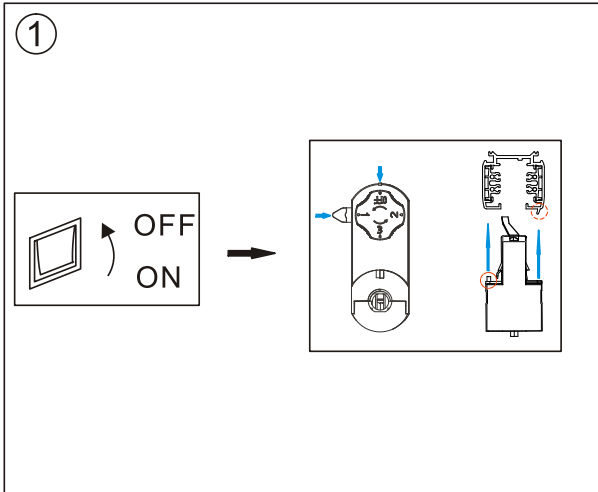

Packaging:



Box
 L135*W115*H310mm
 1pc/box
 GW: 1.25kg/box



Outer carton
 L670Xw500xH350mm
 12 pcs/CTN
 GW: 16.5kg/carton

Product naming system

TL (X) XX X (H) - XW - X XX - X- XX

