


iTrack Vario Series

TL31-30W

Reflector

Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	700mA, 35-37V
Rated life:	>50,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE/RoHS
Weight:	1.25KG

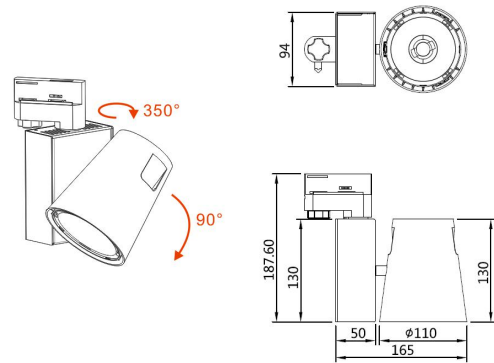


Ordering Information:

○ White ● Black


Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
30W	>80	▲ 15°	2980 lm	3000K	○	TL314-30W-830-W-15
					●	TL314-30W-830-B-15
		▲ 20°	3160 lm	4000K	○	TL314-30W-840-W-15
					●	TL314-30W-840-B-15
		▲ 45°	3010 lm	3000K	○	TL314-30W-830-W-20
					●	TL314-30W-830-B-20
	▲ 45°	3250 lm	4000K	○	TL314-30W-840-W-20	
				●	TL314-30W-840-B-20	
	>90	▲ 15°	2670 lm	3000K	○	TL314-30W-930-W-15
					●	TL314-30W-930-B-15
		▲ 20°	2700 lm	3000K	○	TL314-30W-930-W-20
					●	TL314-30W-930-B-20
▲ 45°		2680 lm	3000K	○	TL314-30W-930-W-45	
				●	TL314-30W-930-B-45	
▲ 45°	2810 lm	4000K	○	TL314-30W-940-W-45		
			●	TL314-30W-940-B-45		

Technical Data test pattern


CRI80 15°

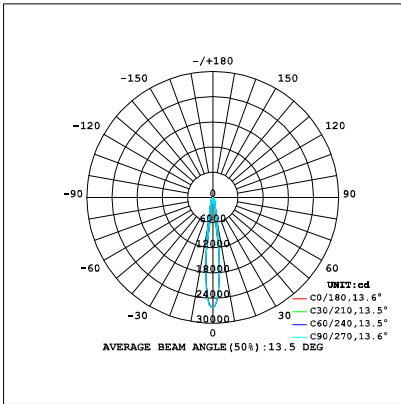


3000K

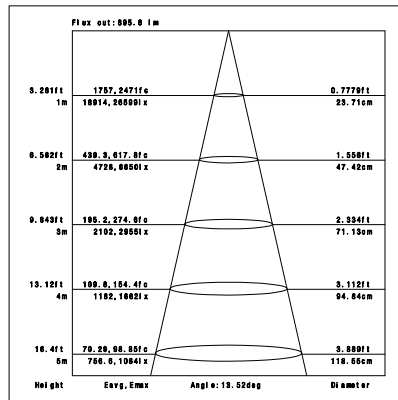


4000K

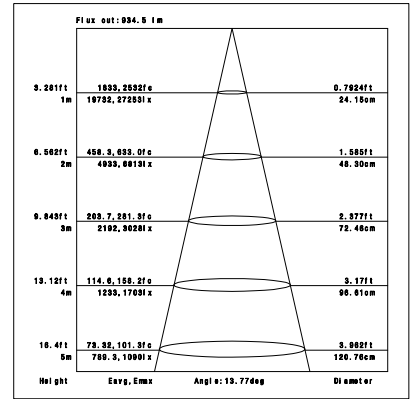


CRI80 20°

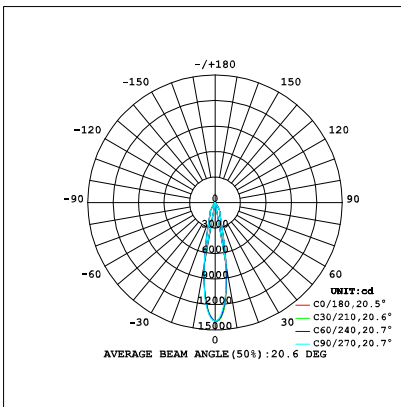


3000K

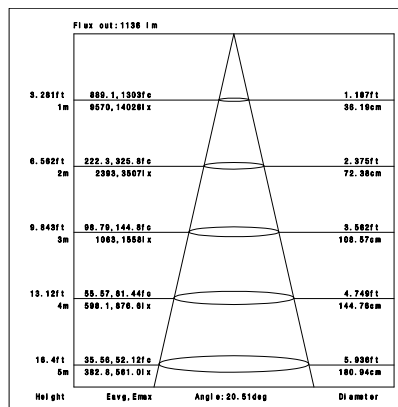


4000K

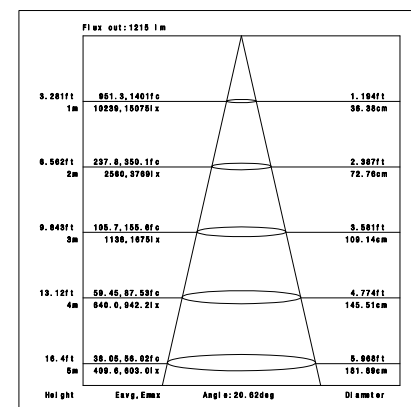


CRI80 45°

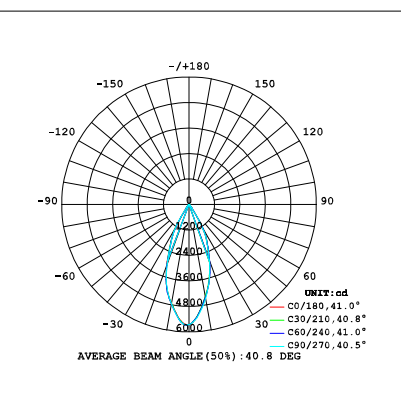


3000K

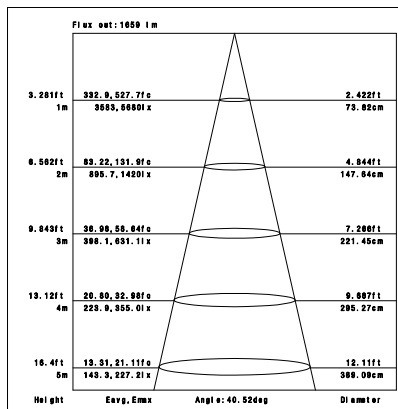


4000K

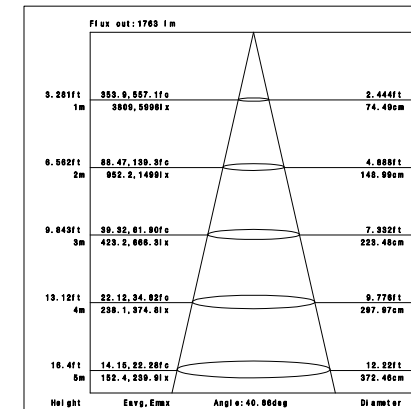


CRI90 15°

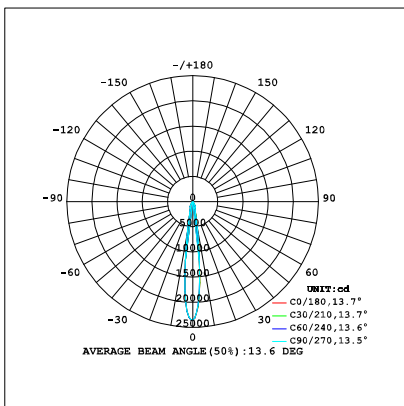


3000K

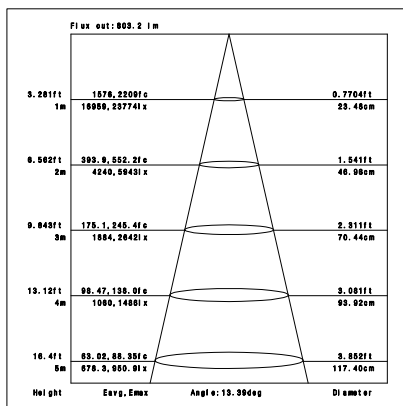


4000K

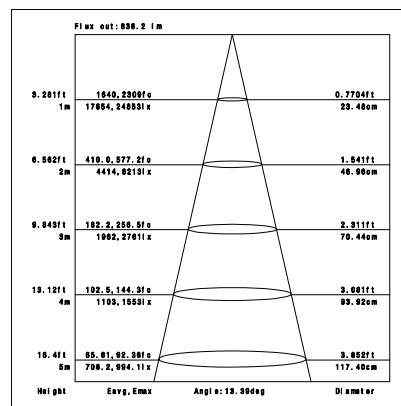


CRI90 20°

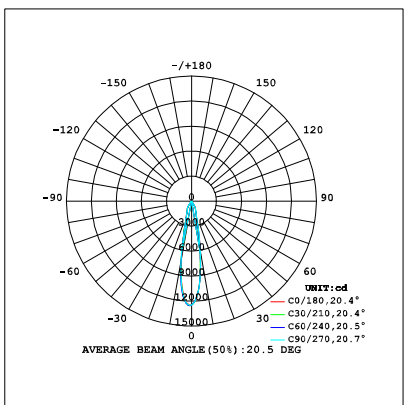


3000K

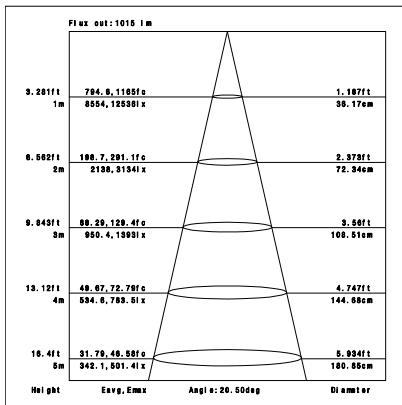


4000K

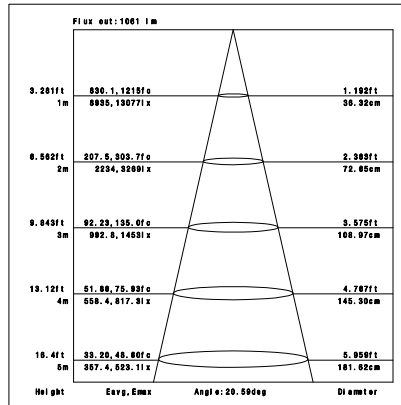


CRI90 45°

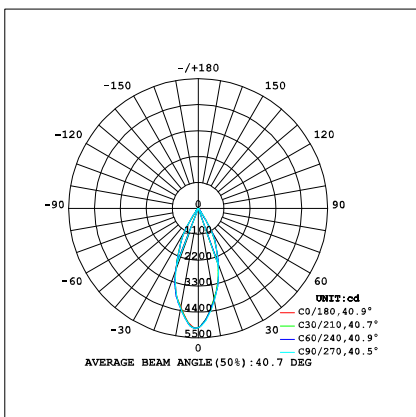





3000K

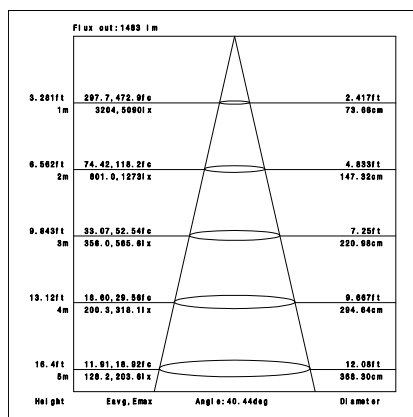


4000K

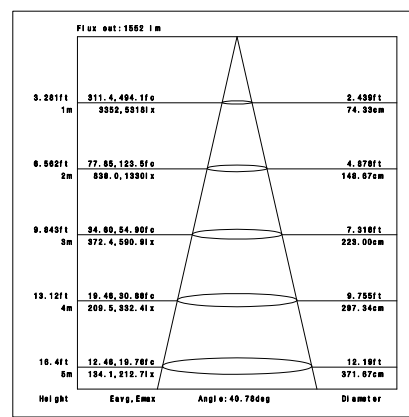


Installation instruction

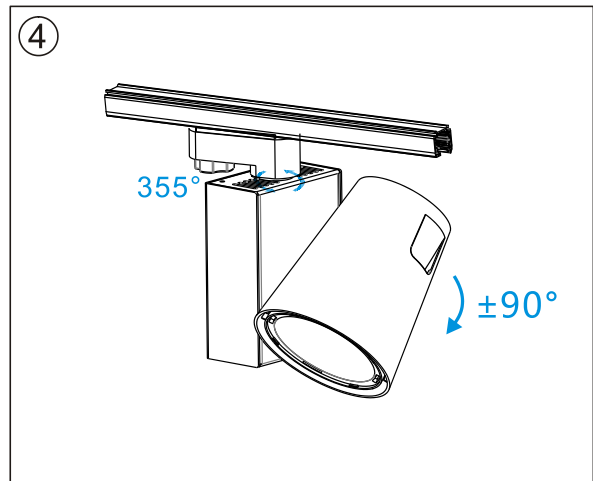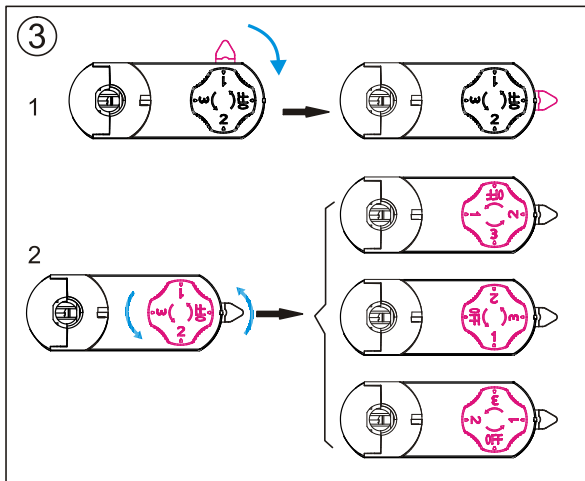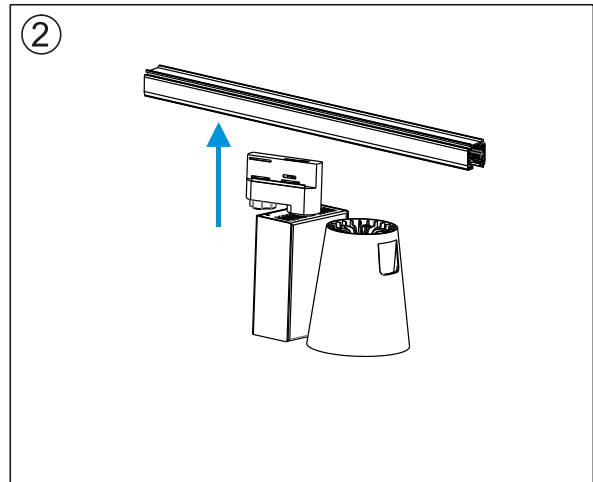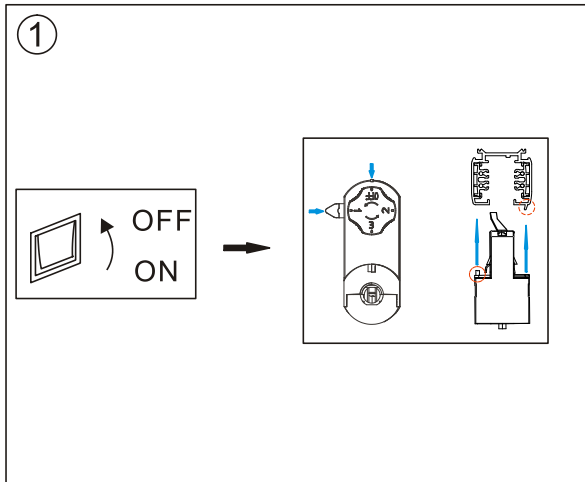

Cautions

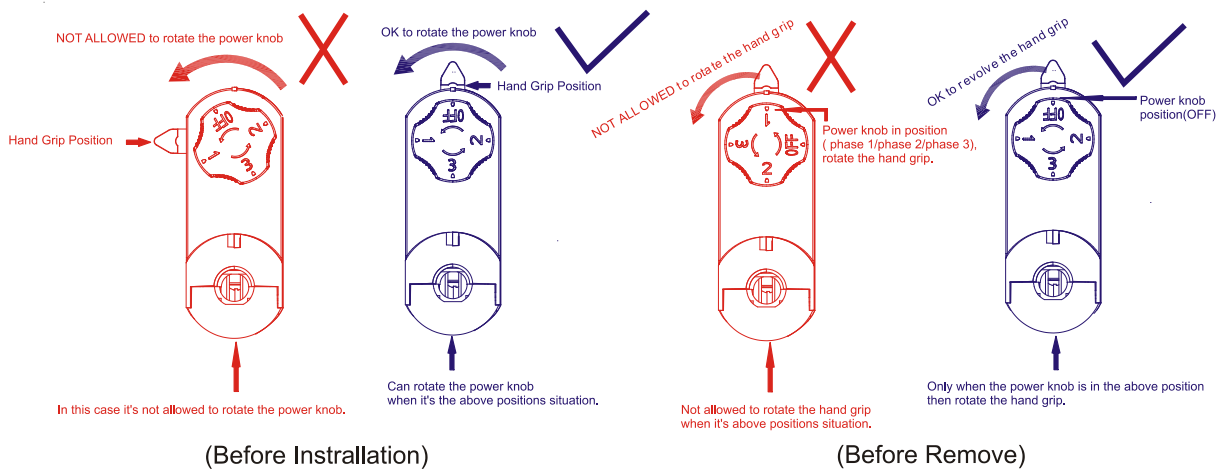

Packaging:




Box

L165*W130*H200mm

1pc/box

GW: 1.55kg/box

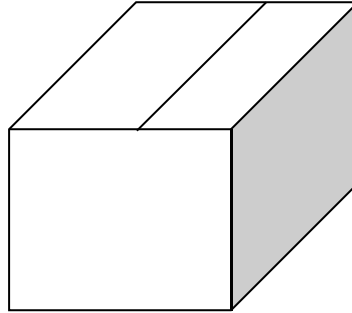

Outer carton

L545Xw355xH430mm

16pcs/CTN

GW: 26kg/carton

Product naming system

TL (X) XX X (H) – XW – X XX – X- XX

